

--	--

		)		



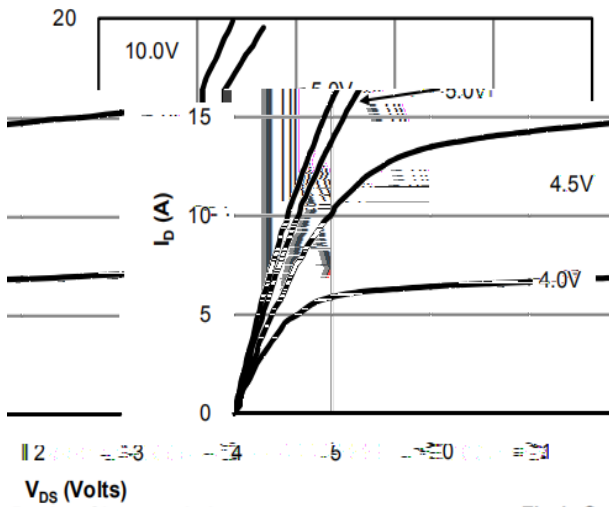


Fig 1: On-state

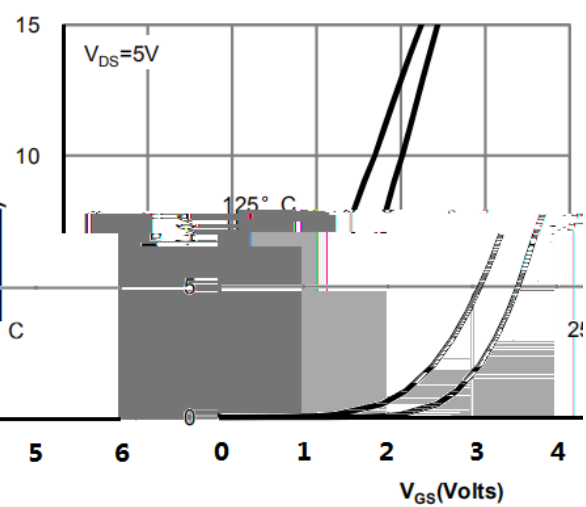


Figure 2: Transfer Characteristics

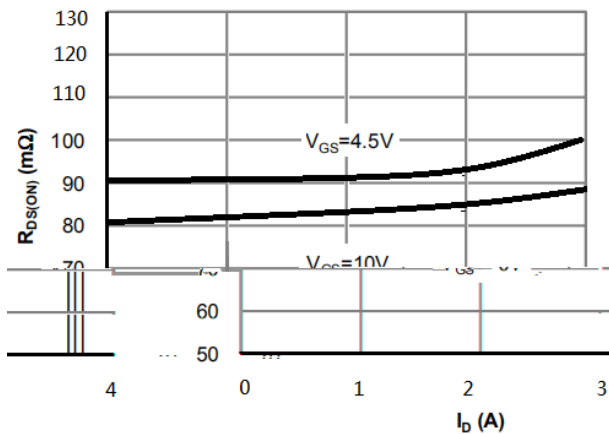


Figure 3: On-Resistance vs. Drain Current

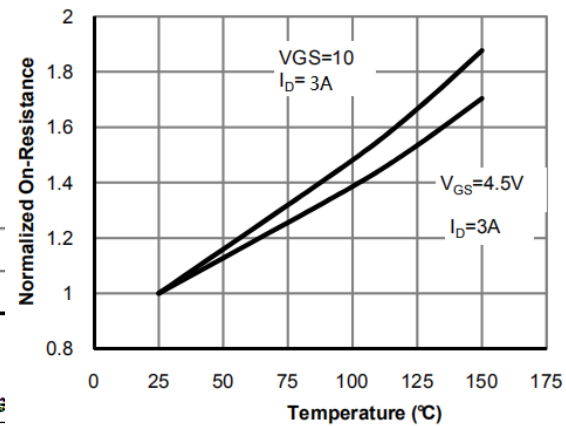


Figure 4: On-Resistance vs. Junction Temperature

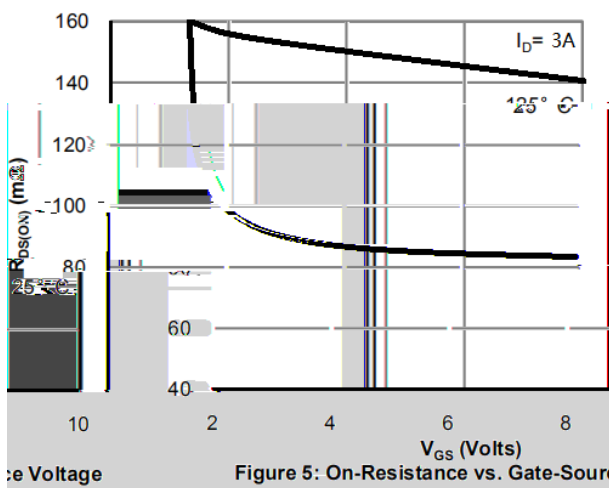


Figure 5: On-Resistance vs. Gate-Source Voltage


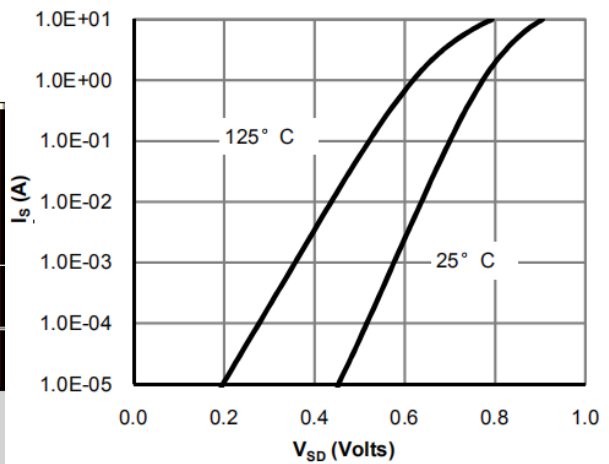


Figure 6: Body-Diode Characteristics

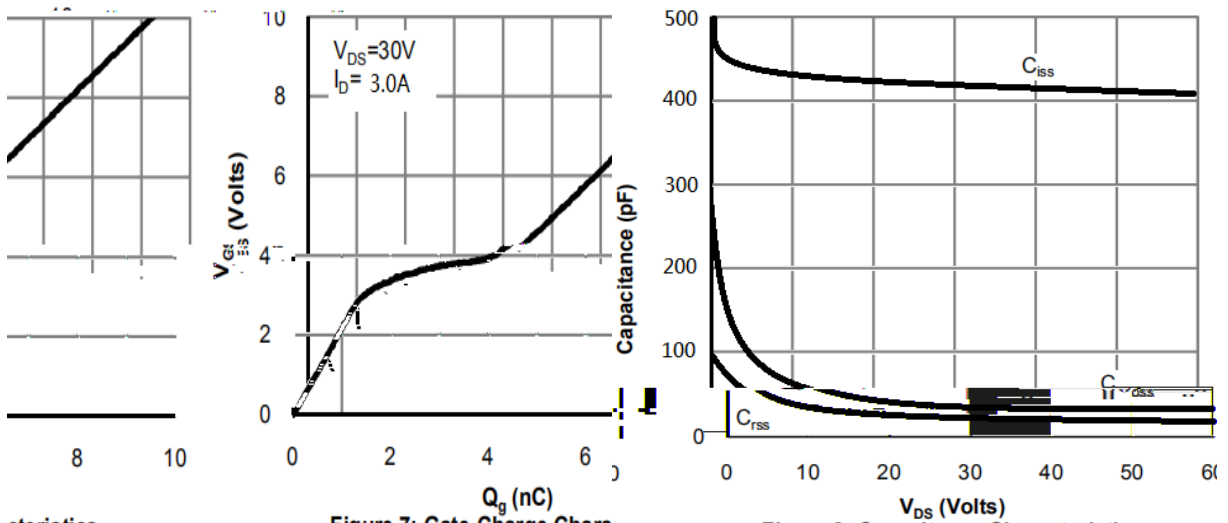

Characteristics

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics




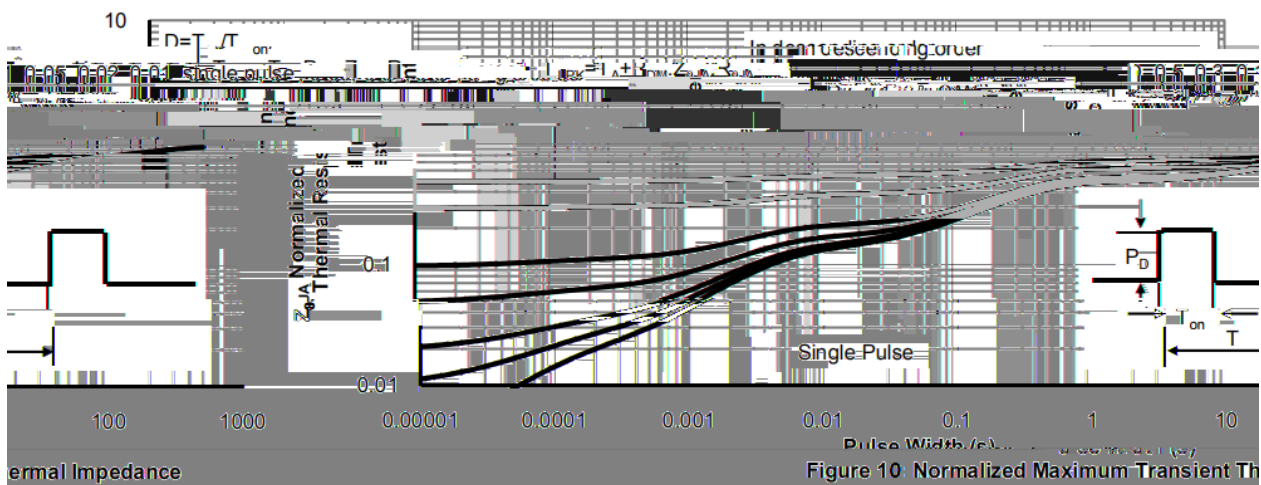


Figure 10: Normalized Maximum Transient Thermal Impedance


SOT-23

单位: mm

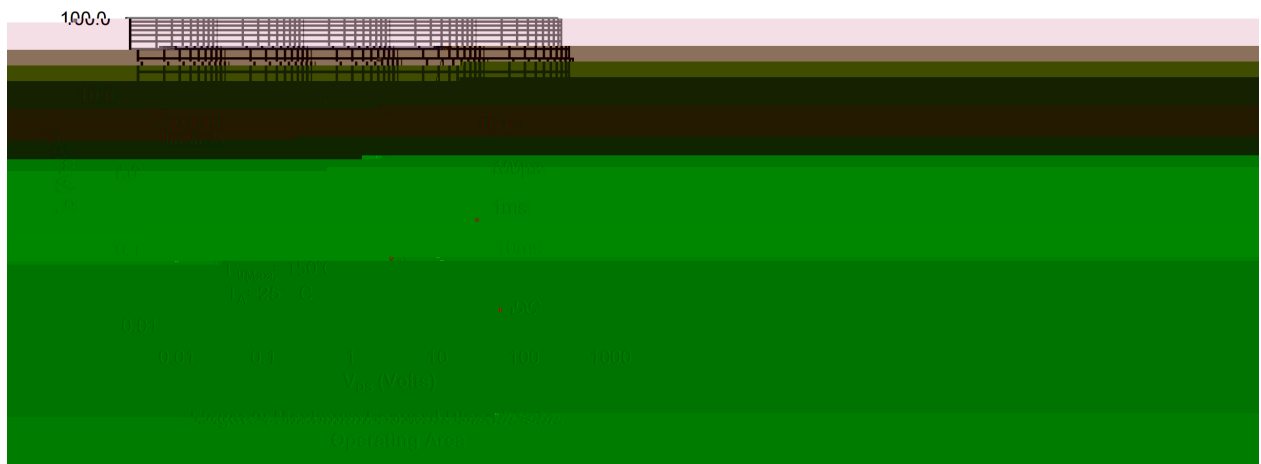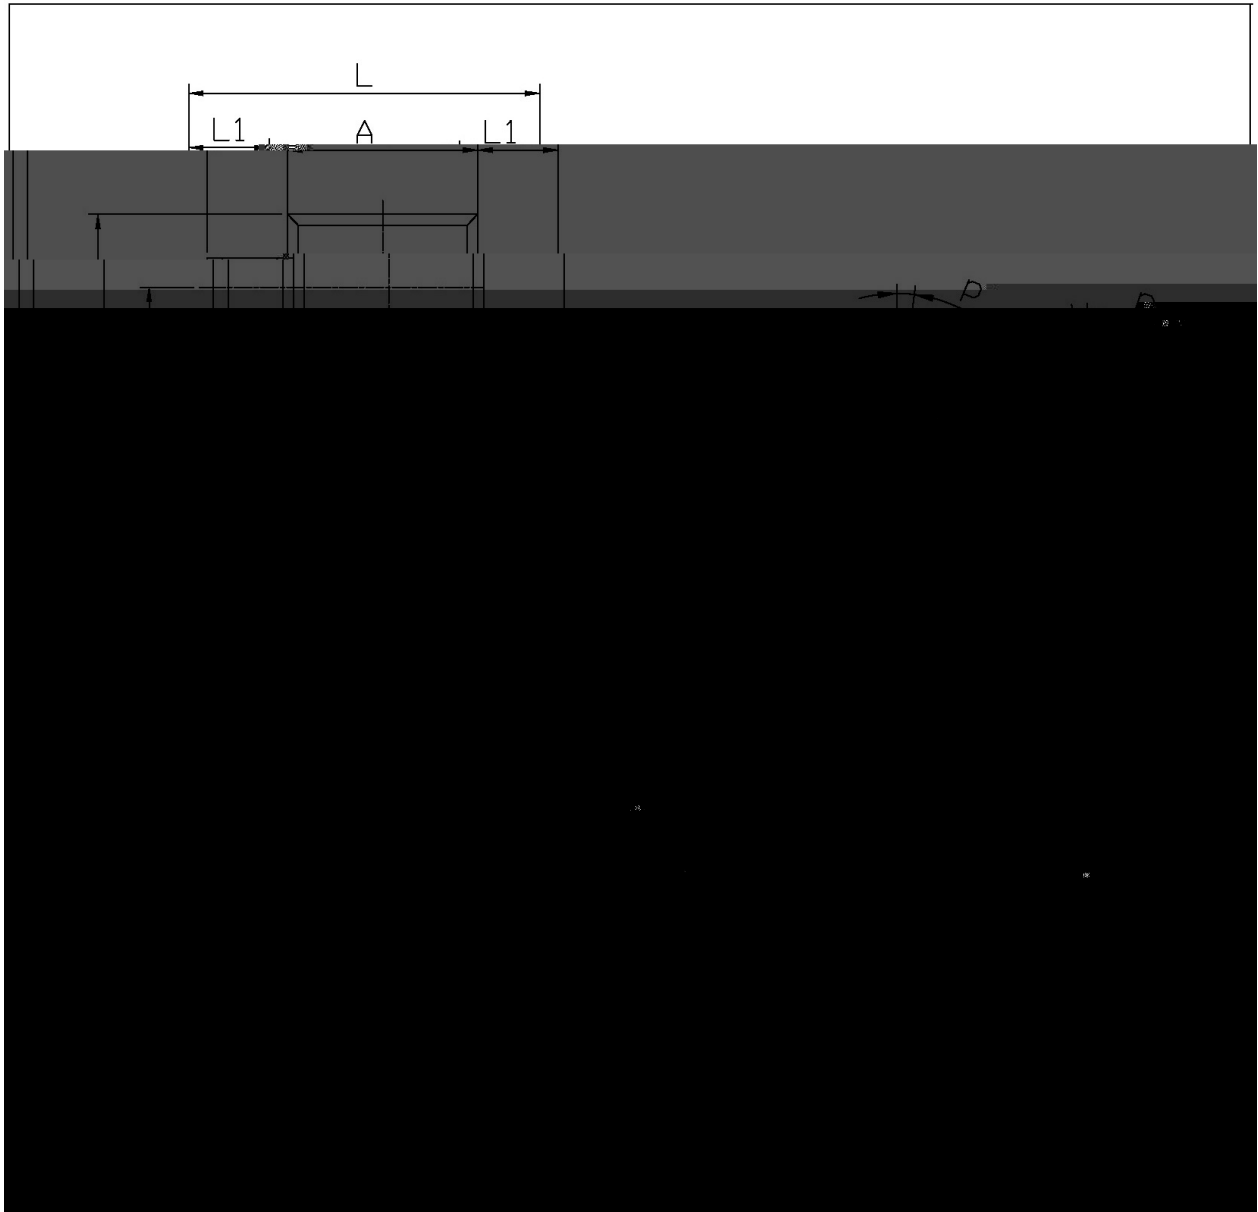

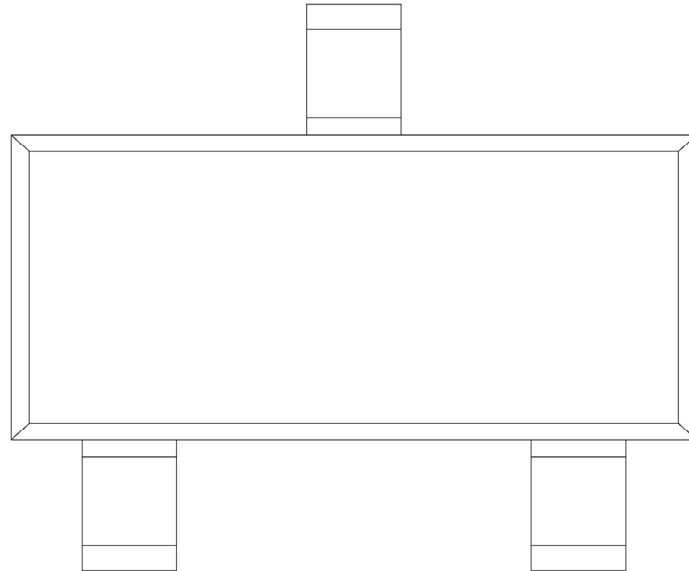

Temperature Profile for IR Reflow Soldering(Pb-Free)

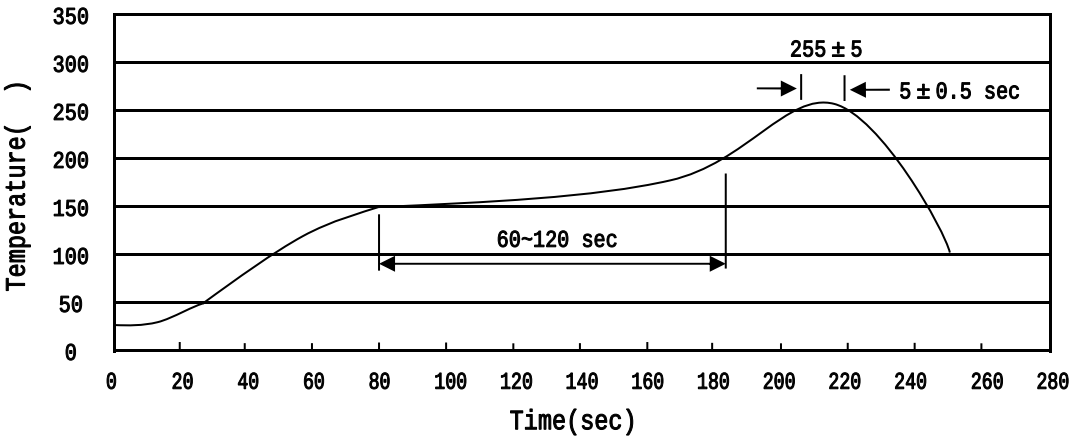

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box