

/ Descriptions

GIQ4339060 S P RV

/ Features

≤ Ω Ω

≤ Ω Ω


≤ Ω Ω

≥


/ Applications

Lqwhqghg iru xvhlq jhghudoxsusrvhvzlwfkqljdqg skdvh frqwuro dssolfdwlrqvl

/ Equivalent Circuit



/ Pinning

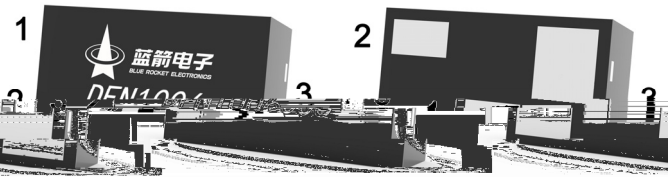

/ Marking




/ Absolute Maximum Ratings(Ta=25)

		2	
			3/8
	≤	θ	3/8

/ Electrical Characteristics(Ta=25)

						μ
					±	μ
						Ω
						Ω
						Ω
						Ω
						Ω
						Ω
		Ω	Ω			

/ Electrical Characteristic Curve

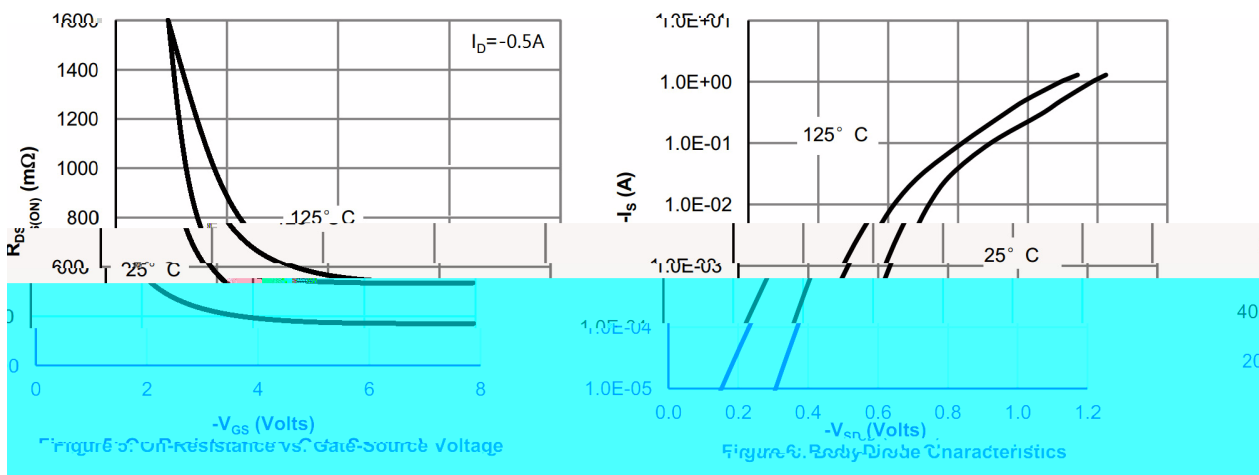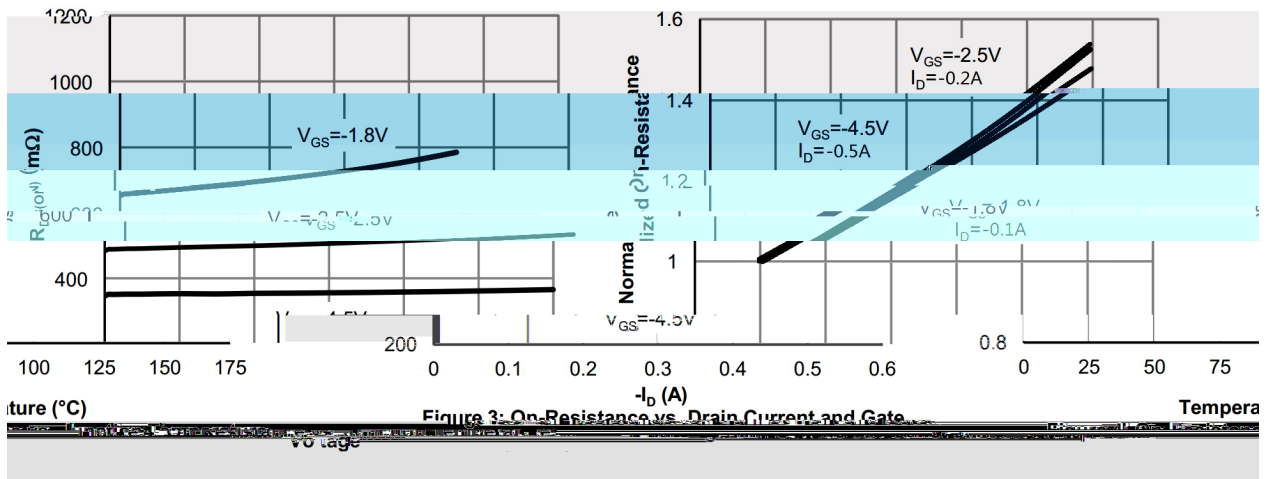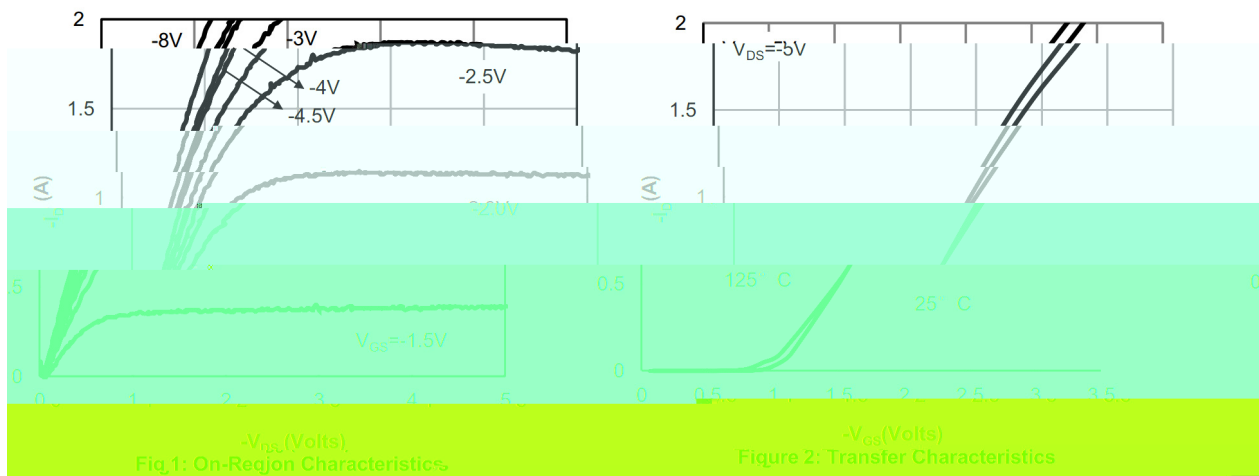

/ Electrical Characteristic Curve




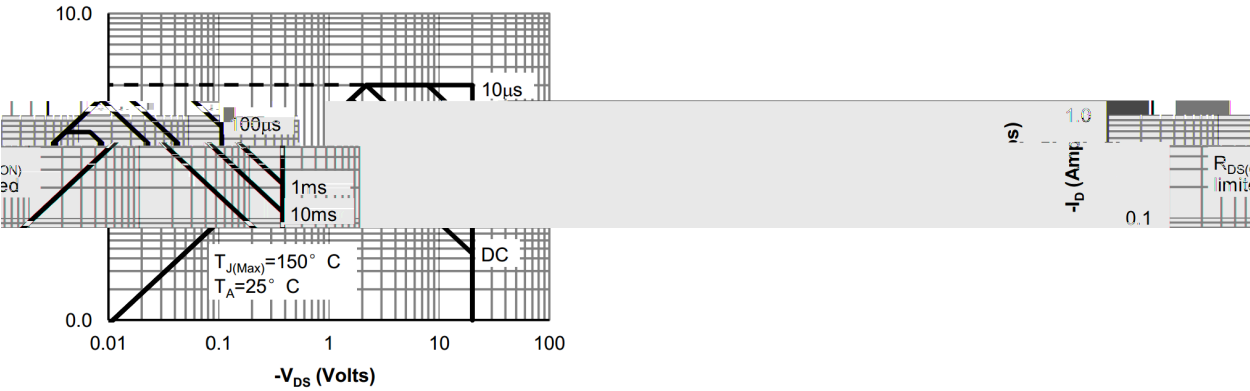



Figure 9: Maximum Forward Biased Safe Operating Area

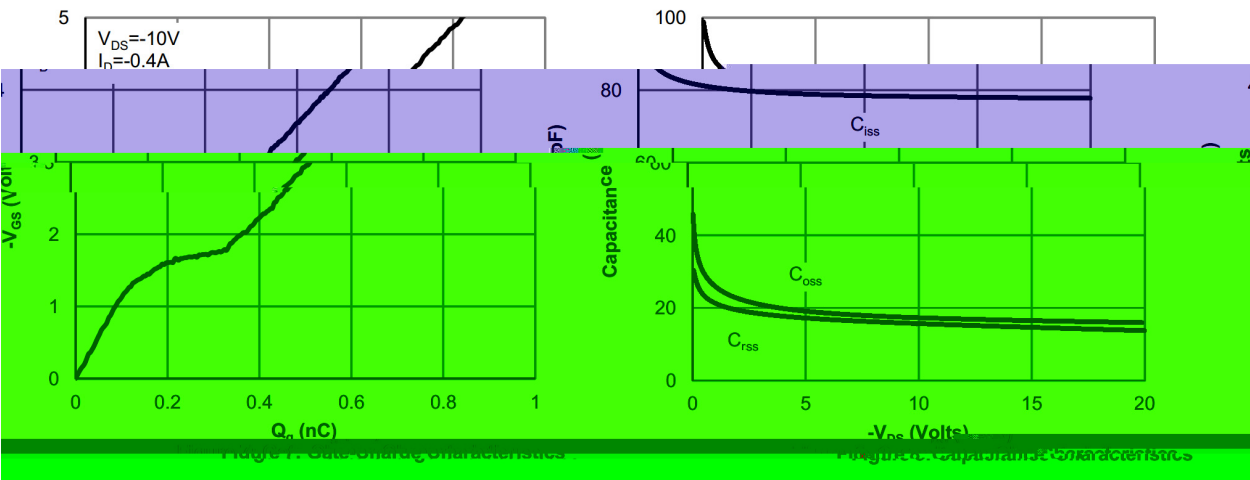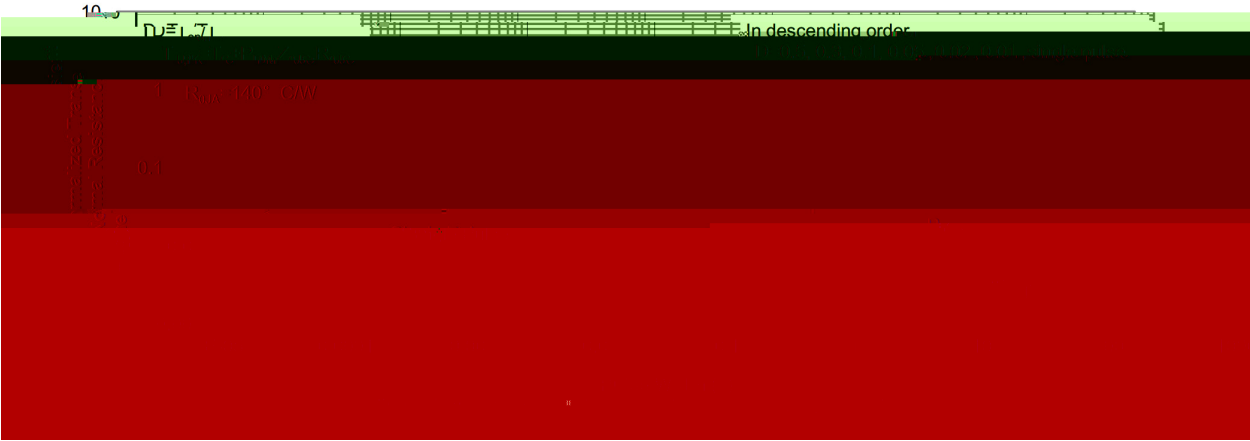


/ Package Dimensions

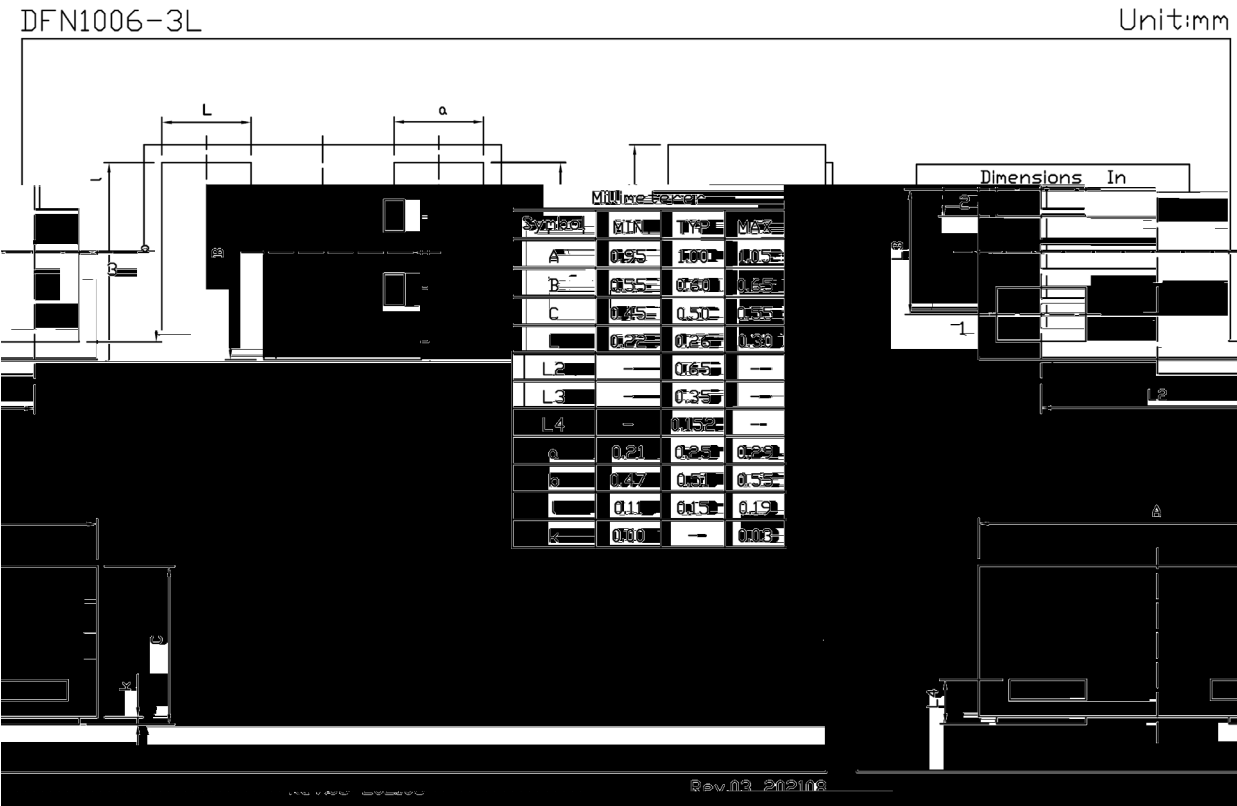

/ Marking Instructions

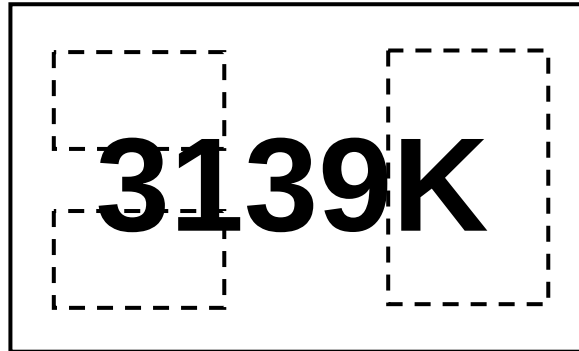

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

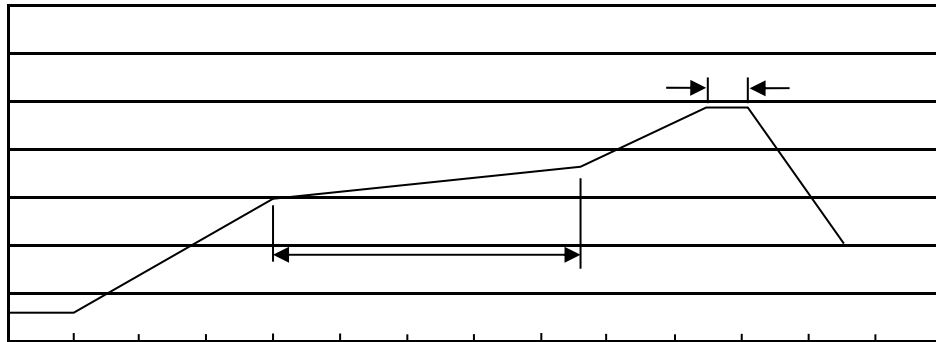

Two diagrams of a 2x2x2 cube showing the 3/8 position. The left diagram shows the 3/8 position with the top face having 3/8 and the front face having 2. The right diagram shows the 3/8 position with the top face having 3/8 and the right face having 2.

/ Resistance to Soldering Heat Test Conditions

$$2 \frac{3}{8} \qquad 2$$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices