


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

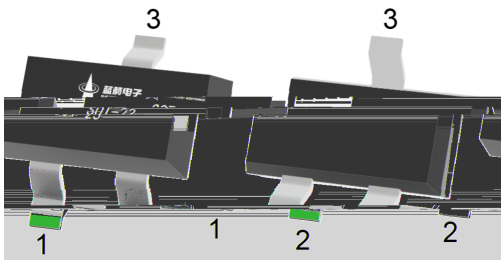

/ Marking

--	--

	≤	θ		
		θ		

						Ω

/ Electrical Characteristic Curve

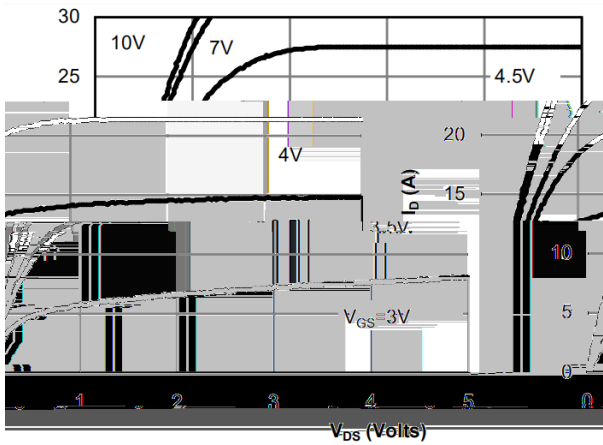


Fig 1: On-Region Characteristics


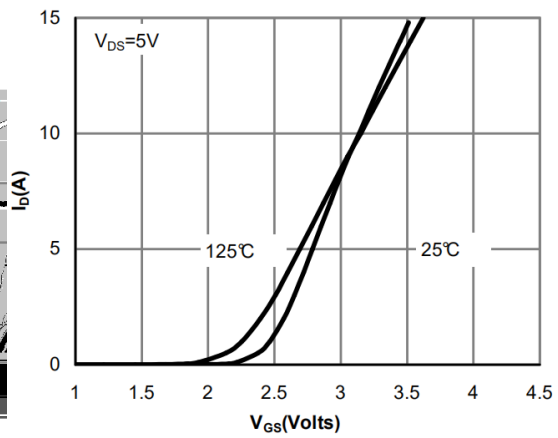


Figure 2: Transfer Characteristics

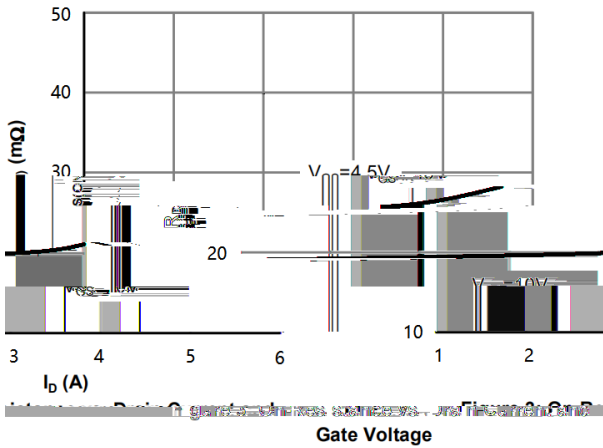

Gate Voltage

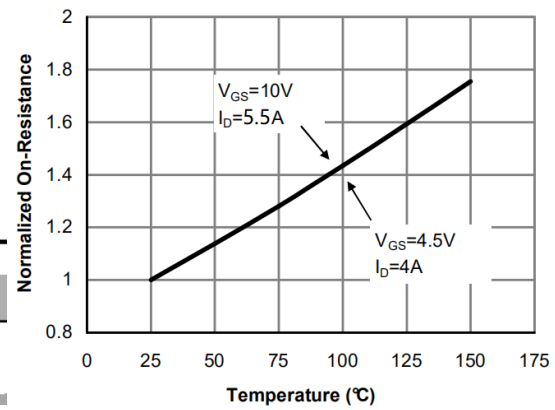


Figure 4: On-Resistance vs. Junction Temperature

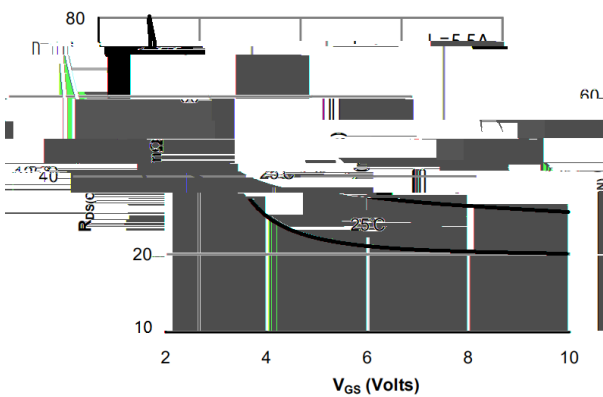


Figure 5: On-Resistance vs. Gate-Source Voltage





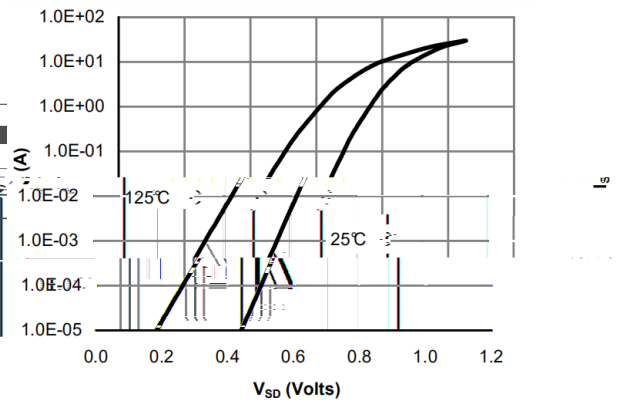


Figure 6: Body-Diode Characteristics


/ Electrical Characteristic Curve

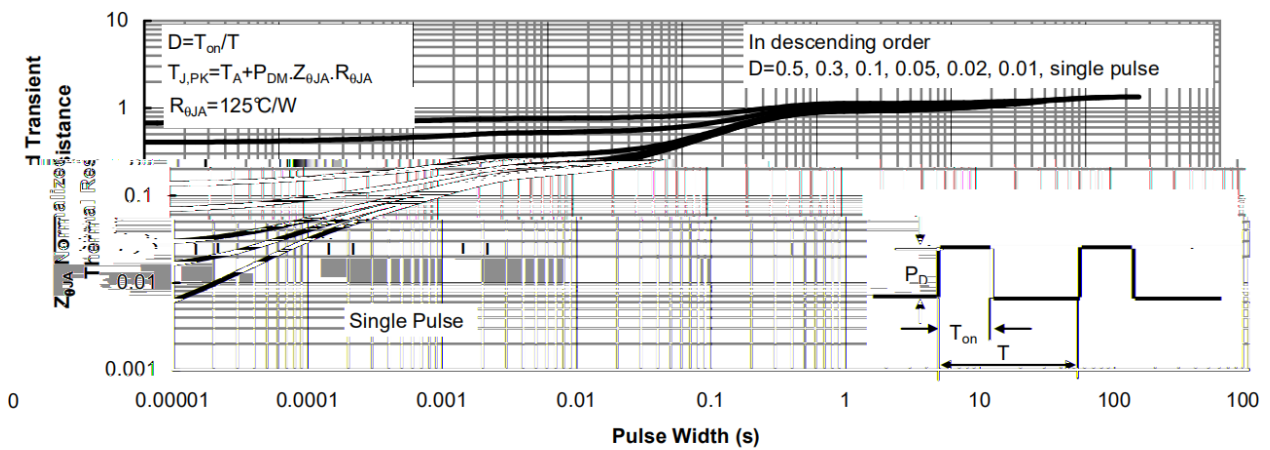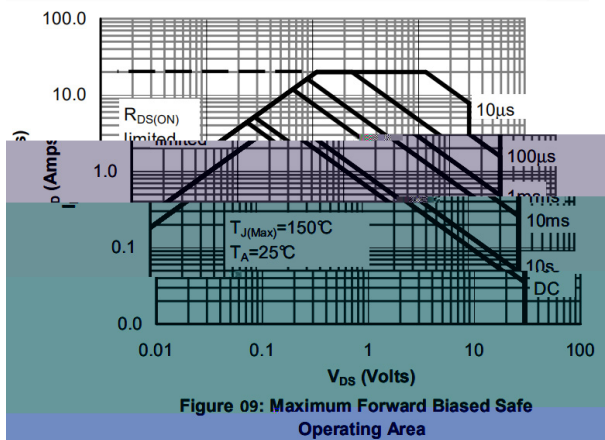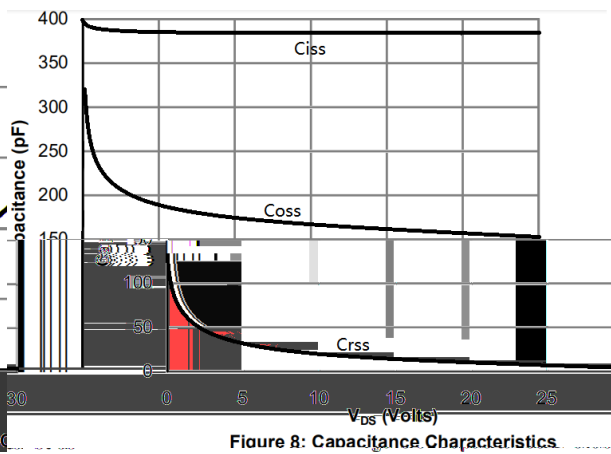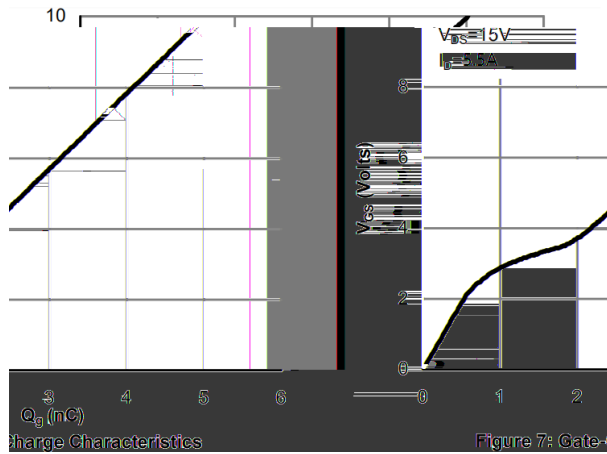


/ Package Dimensions

SOT-23

单位：mm

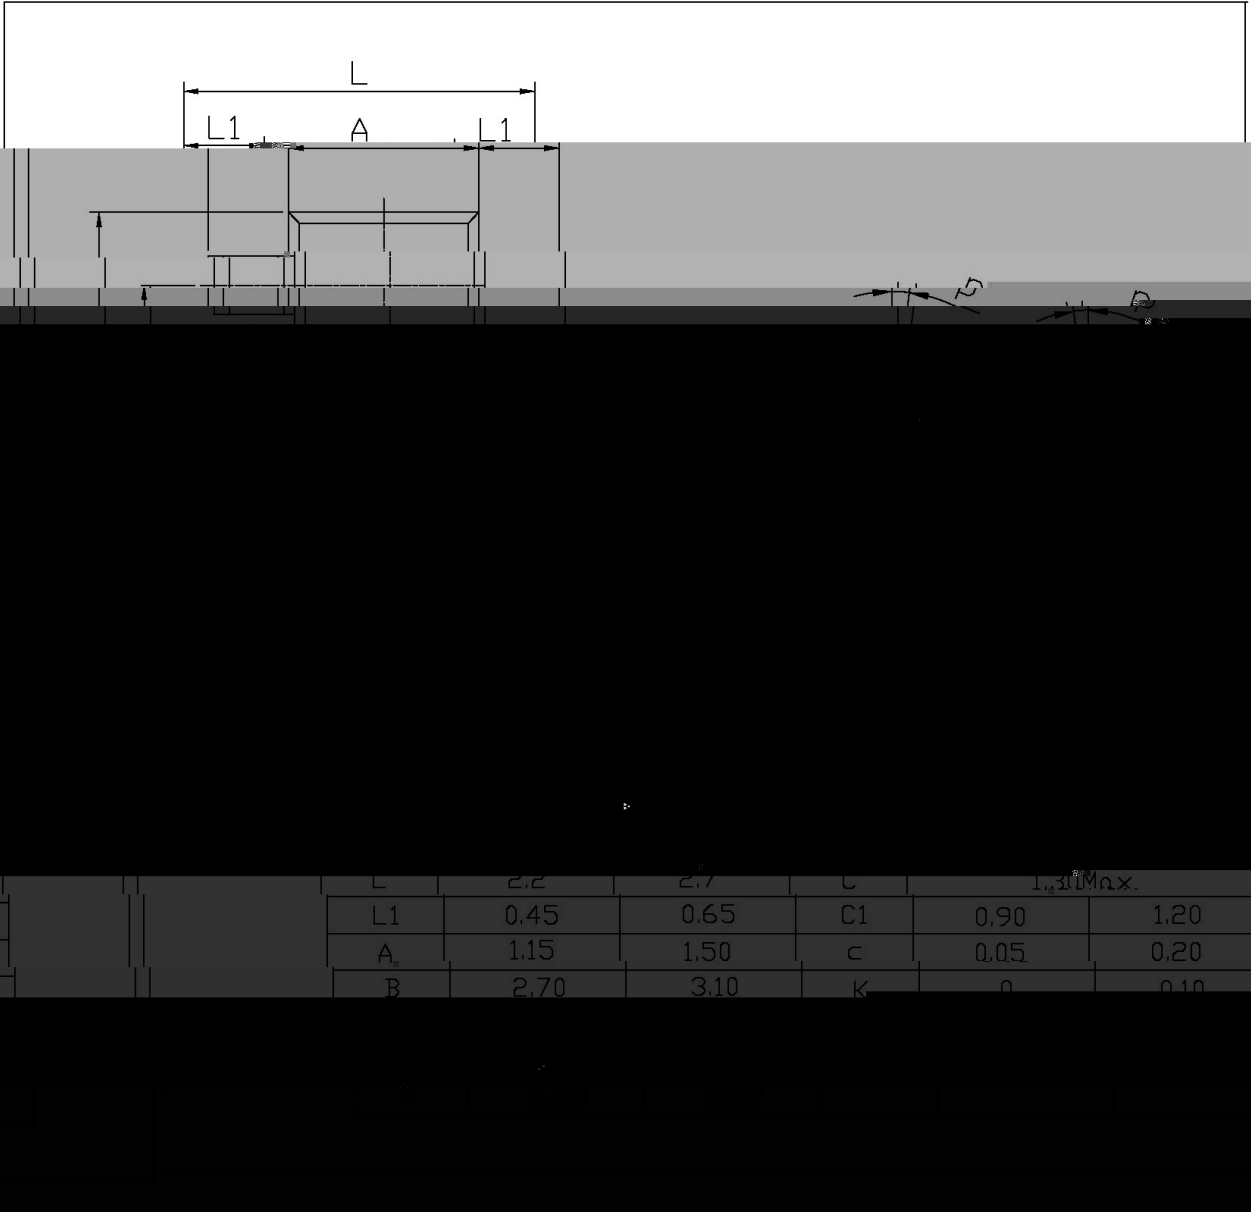

/ Marking Instructions

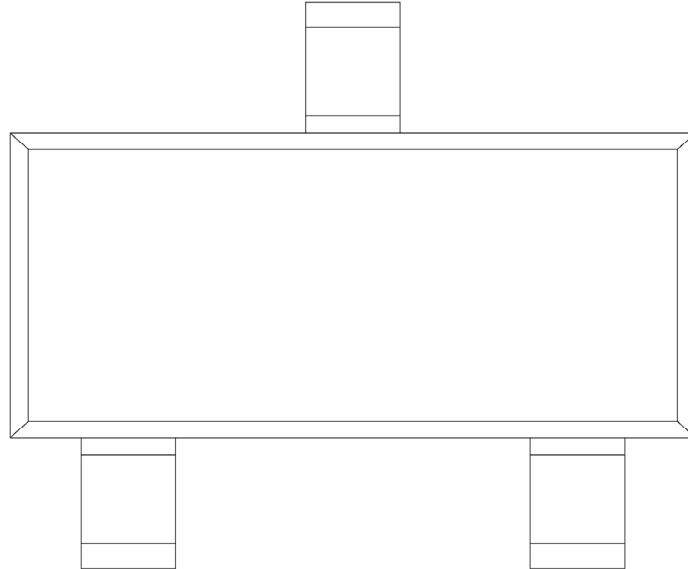

() / Temperature Profile for IR Reflow Soldering(Pb-Free)
