

/ Descriptions


N

/ Features


Ω
 Ω
Halogen free product.

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking


--	--

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω Ω				

/ Electrical Characteristic Curve

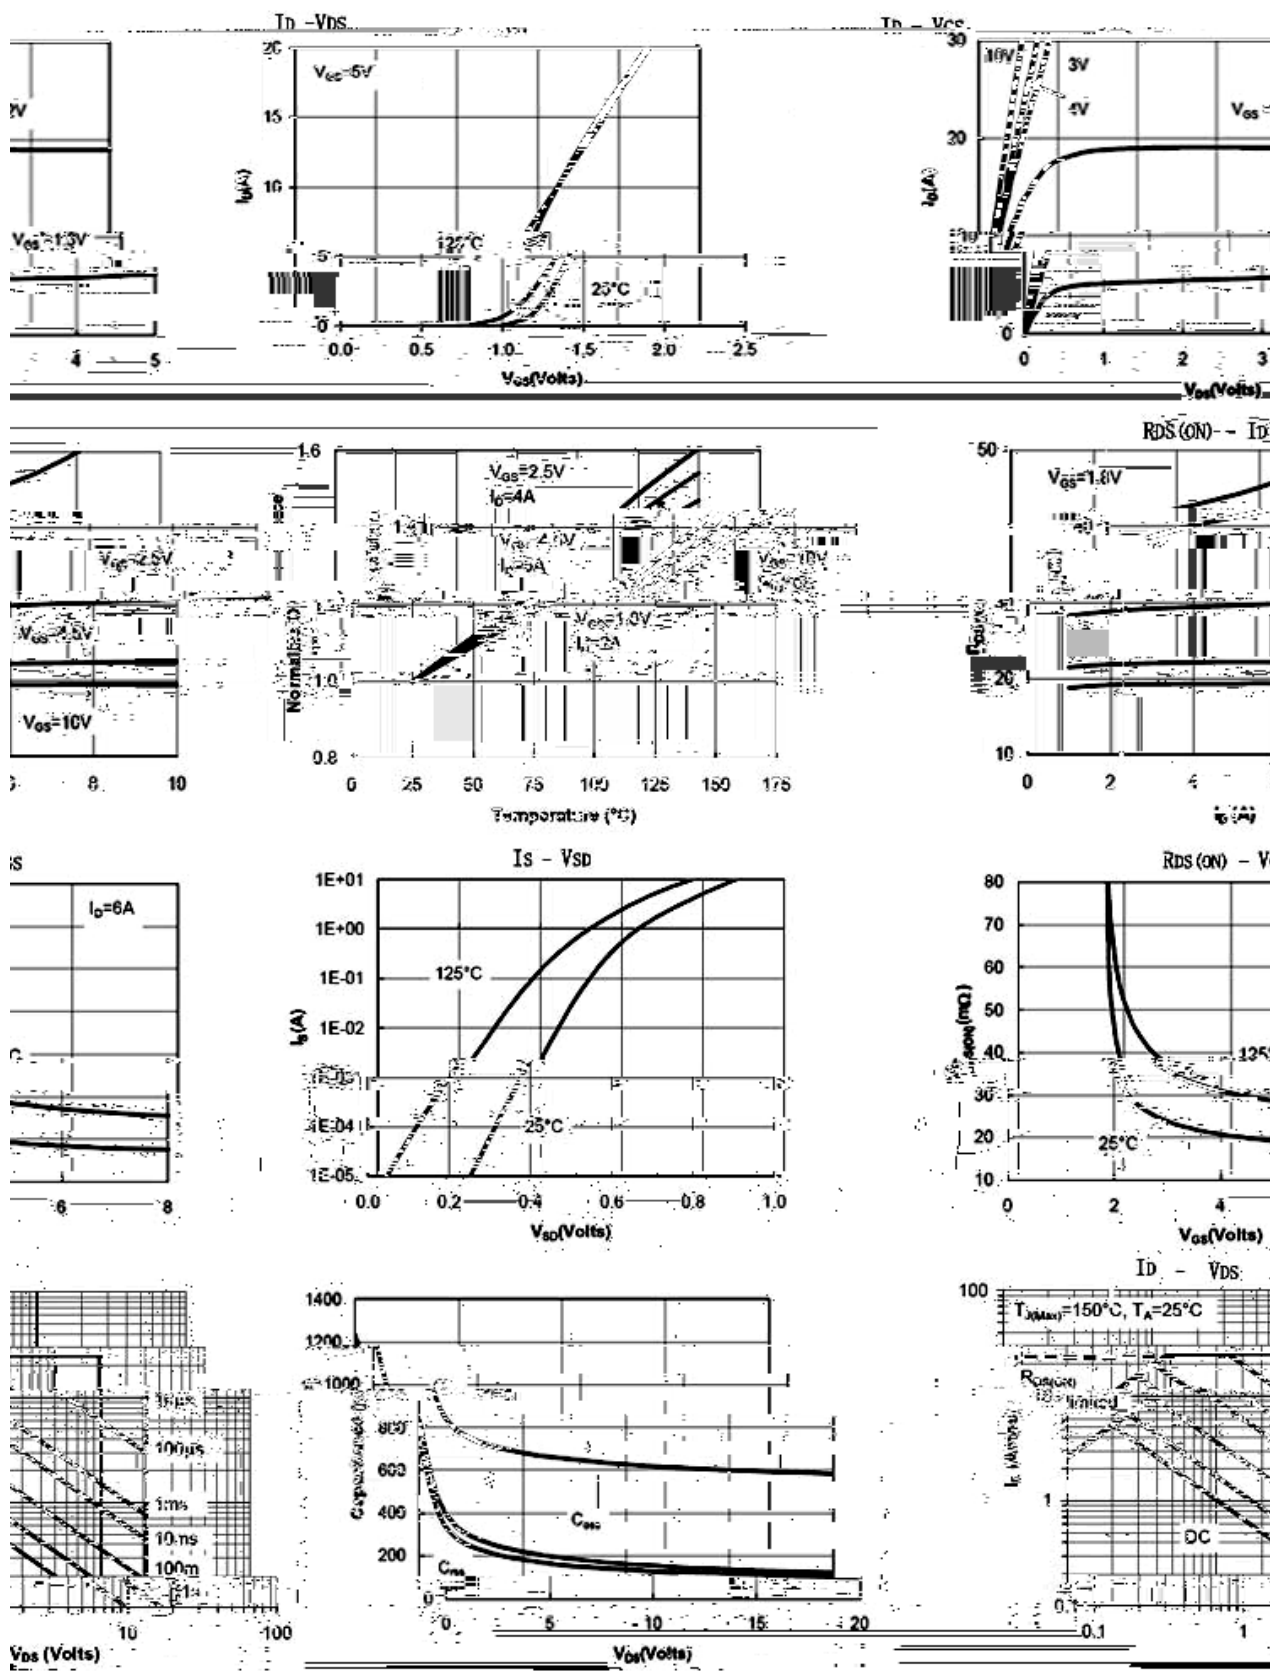


/ Package Dimensions

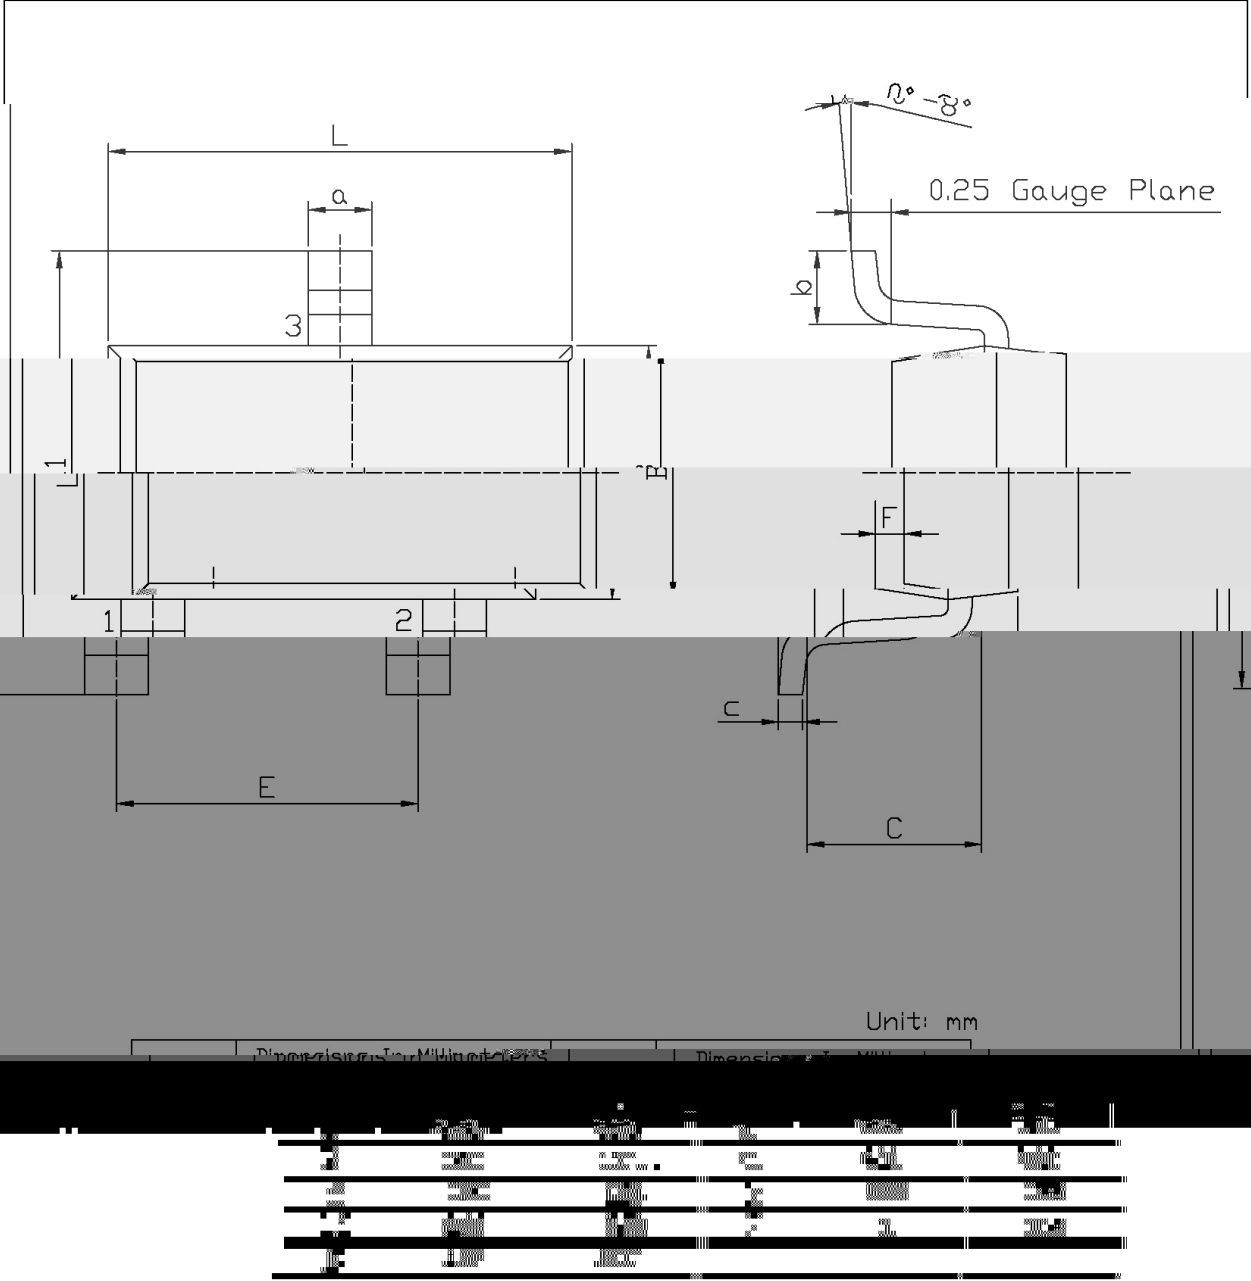


XC-231-3

/ Marking Instructions

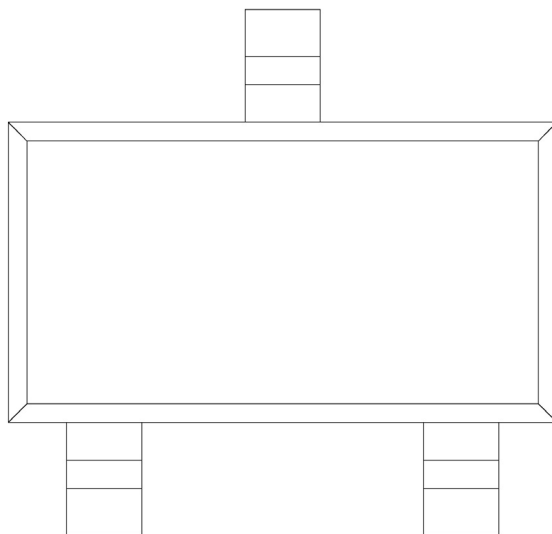

() /

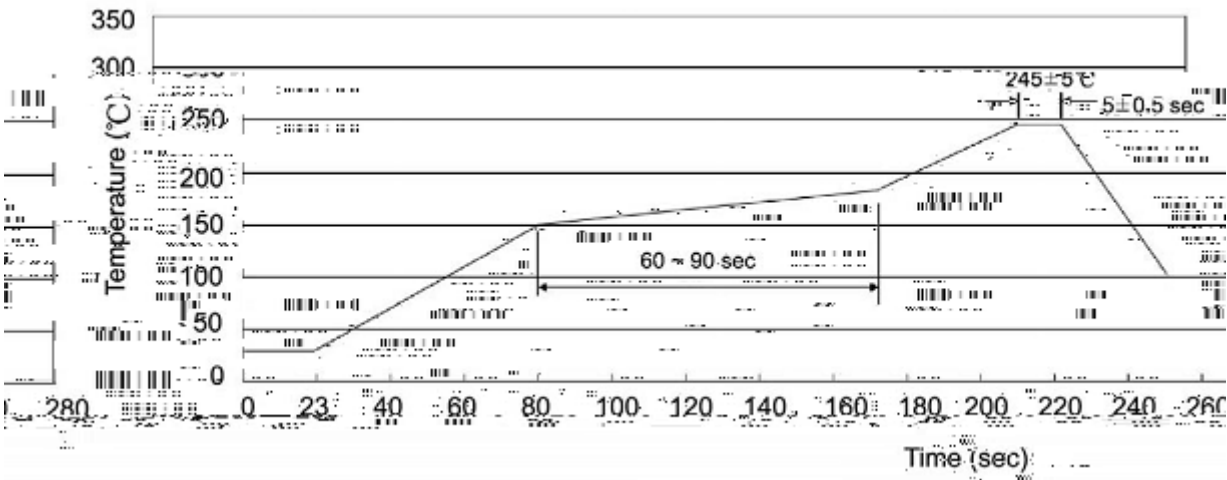

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23-3	3,000	10	30,000	4	120,000	7 ×8	210×205×205	445×230×435

/ Notices