



Ω
 Ω





			±	
		θ		
		θ		



		μ				
					±	
		μ				
						Ω



		Ω Ω				

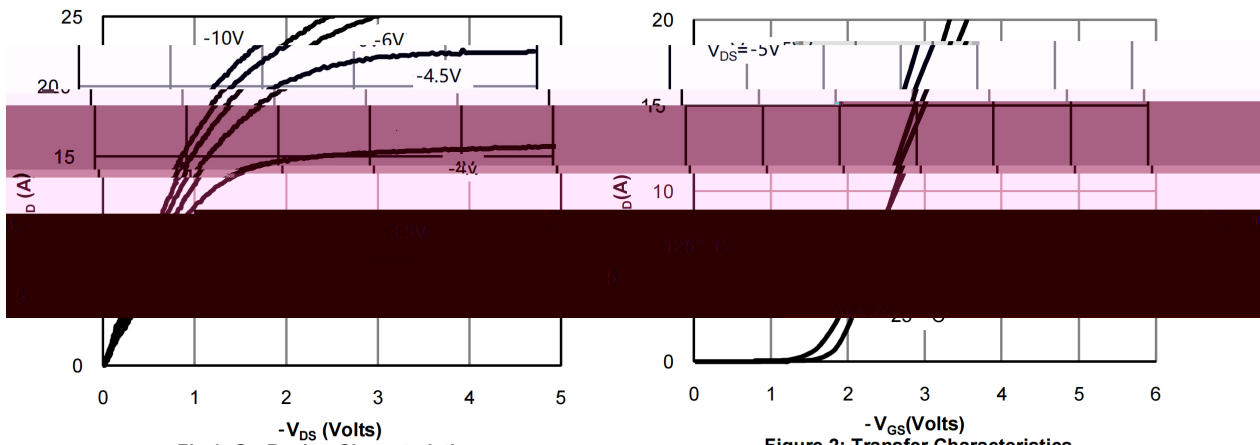


Fig 1: On-Region Characteristics

Figure 2: Transfer Characteristics

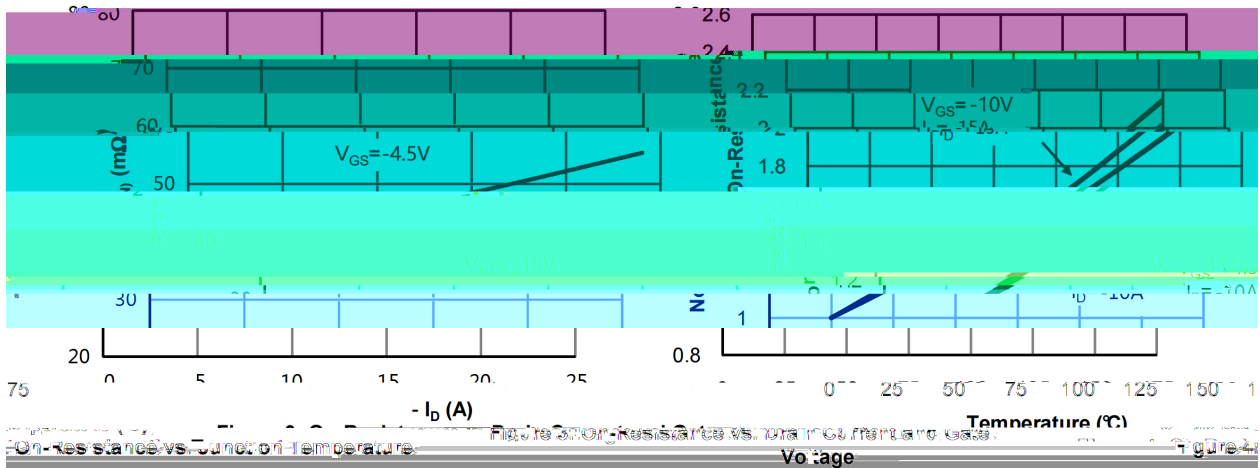


Figure 3: On-Resistance vs. Drain Current

Figure 4: On-Resistance vs. Temperature

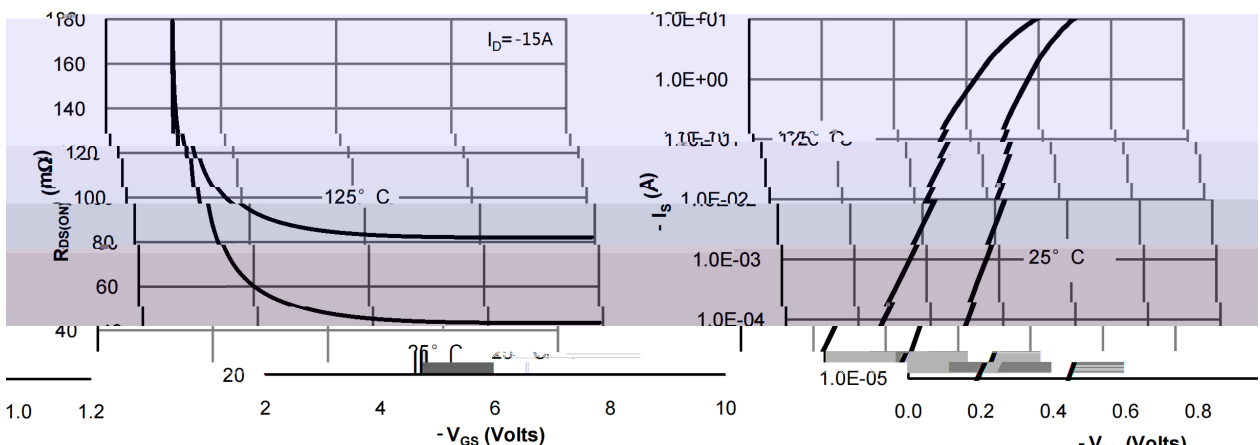


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics




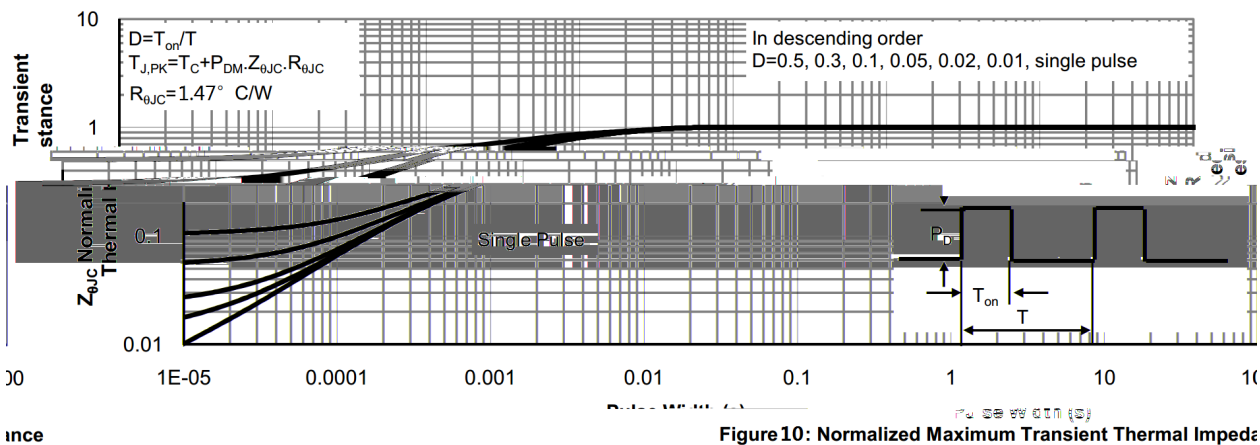



Figure10: Normalized Maximum Transient Thermal Impedance

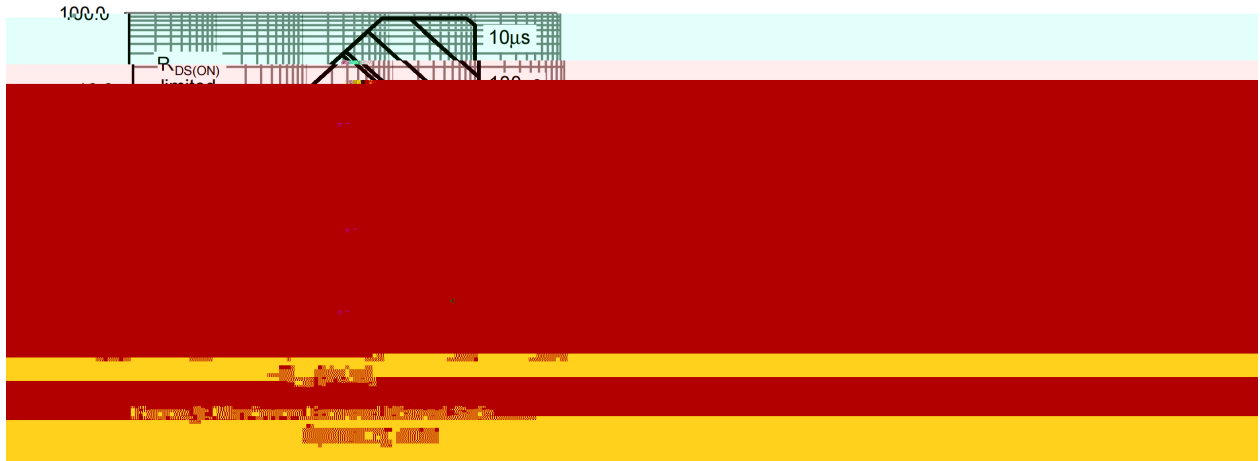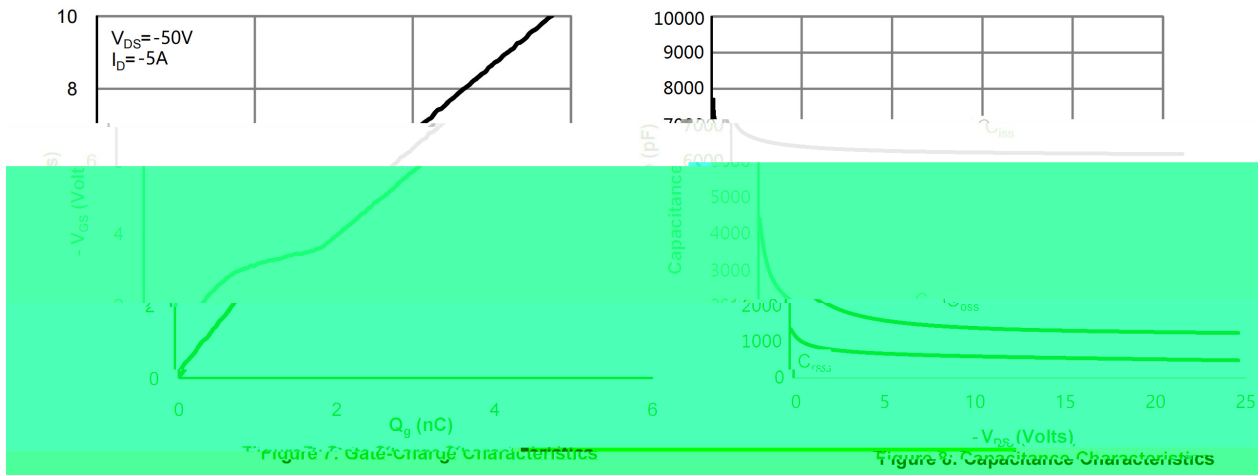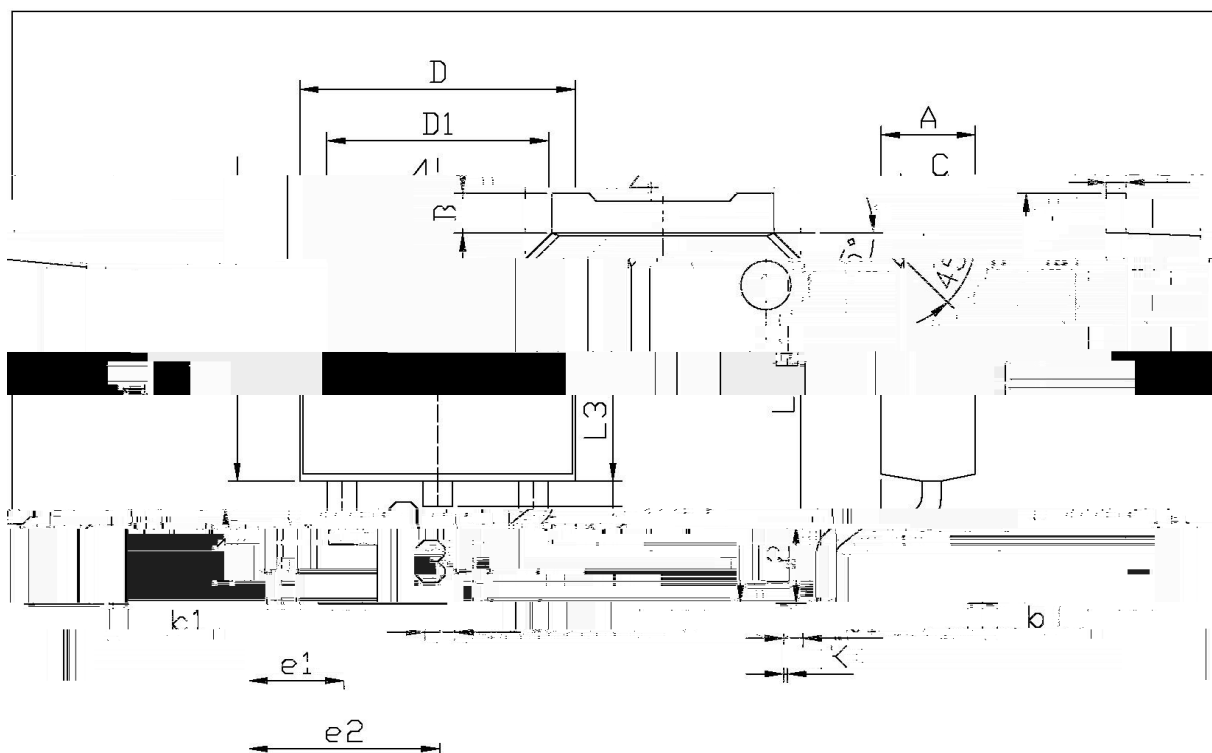

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	5.95	6.25	A	2.20	2.40
B	2.24	2.34	B	0.95	1.25
C	1.42	1.72	b	0.70	0.90
D	9.85	10.35	b1	0.45	0.55
D1	3.00	3.40	L2	1.70	2.00
L1	0.60	0.90	D	6.45	6.75
L2	5.50	6.00	D1	5.10	5.40
L3	0.60	0.90			
K	0.60	0.90			

T0-252

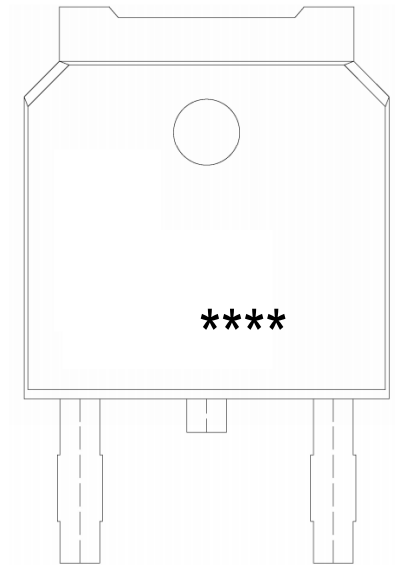

Temperature Profile for IR Reflow Soldering(Pb-Free)