

/ Descriptions


N

/ Features


$\leq$	Ω	Ω
$\leq$	Ω	Ω

/ Applications

/ Equivalent Circuit



/ Pinning

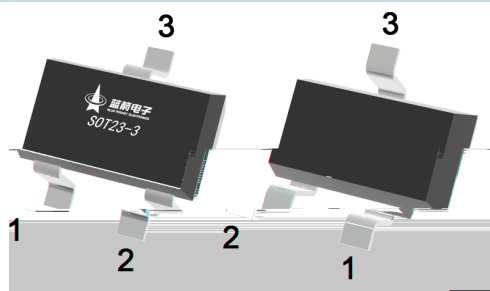

/ Marking




--	--

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				


/ Electrical Characteristic Curve

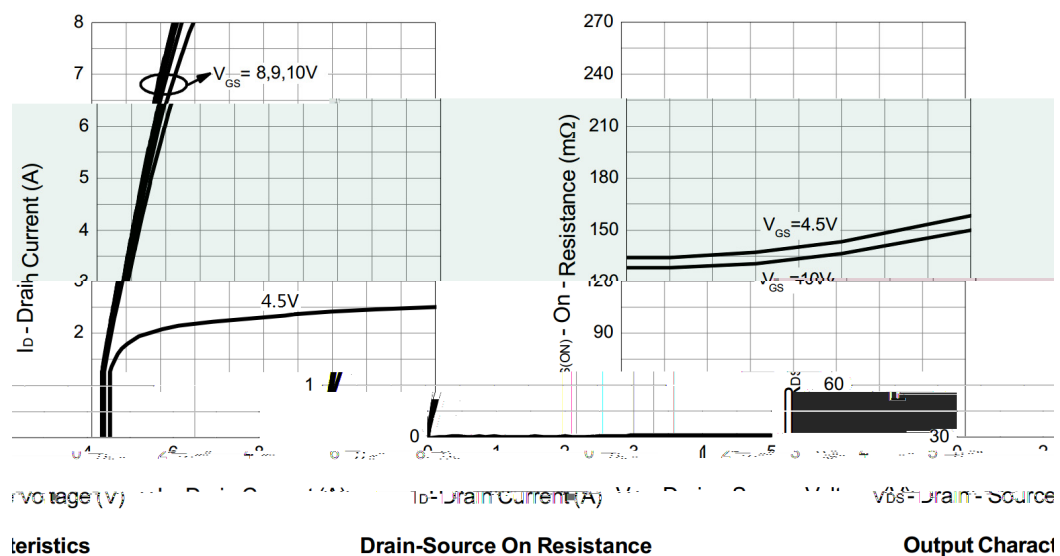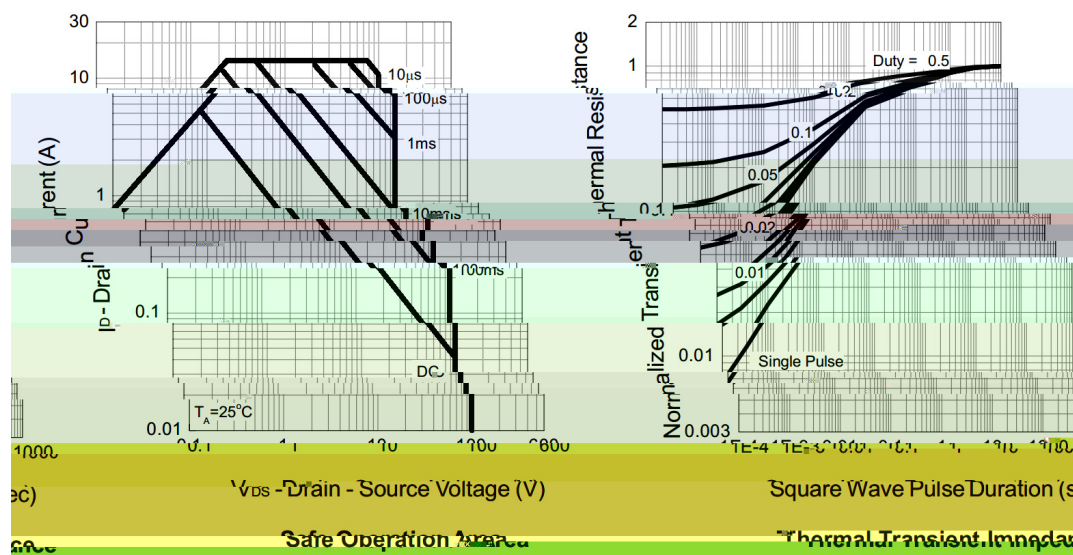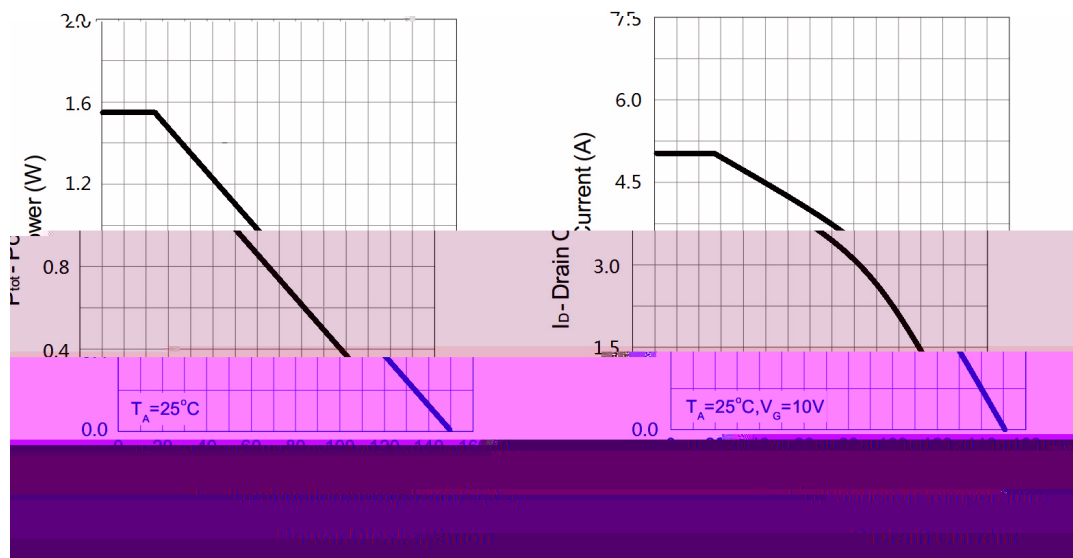

/ Electrical Characteristic Curve

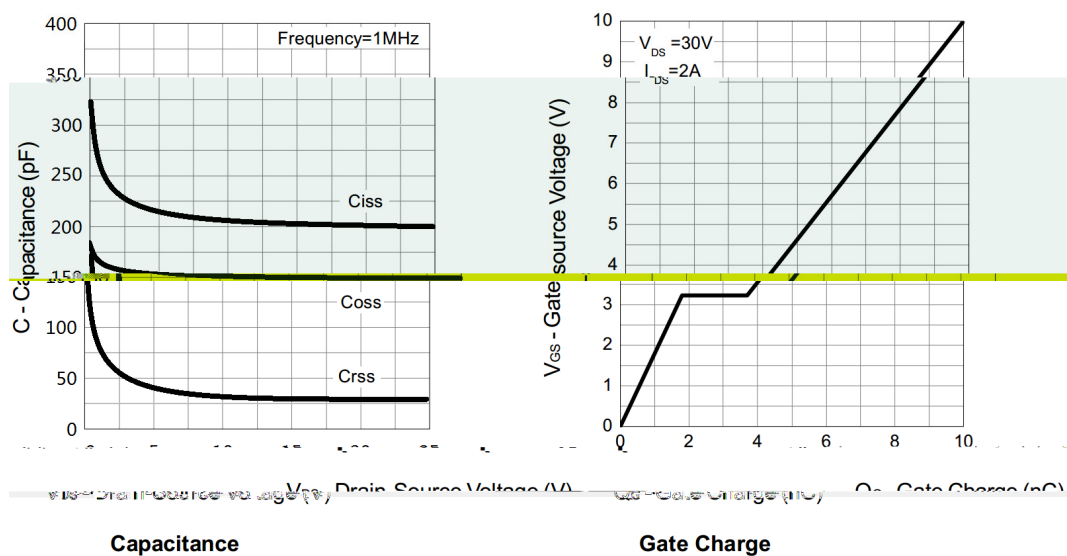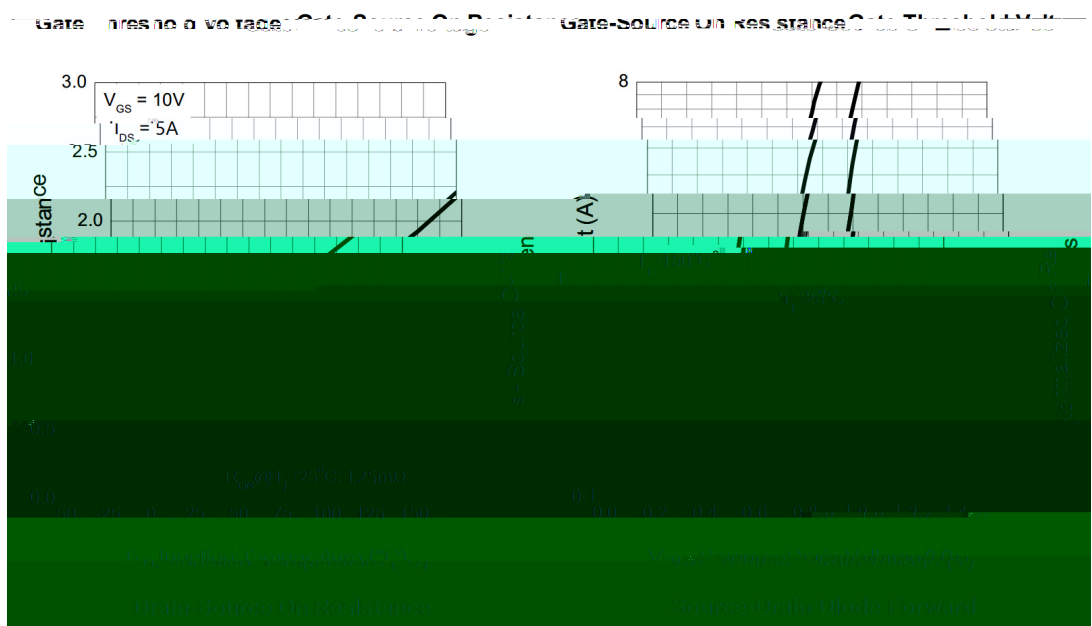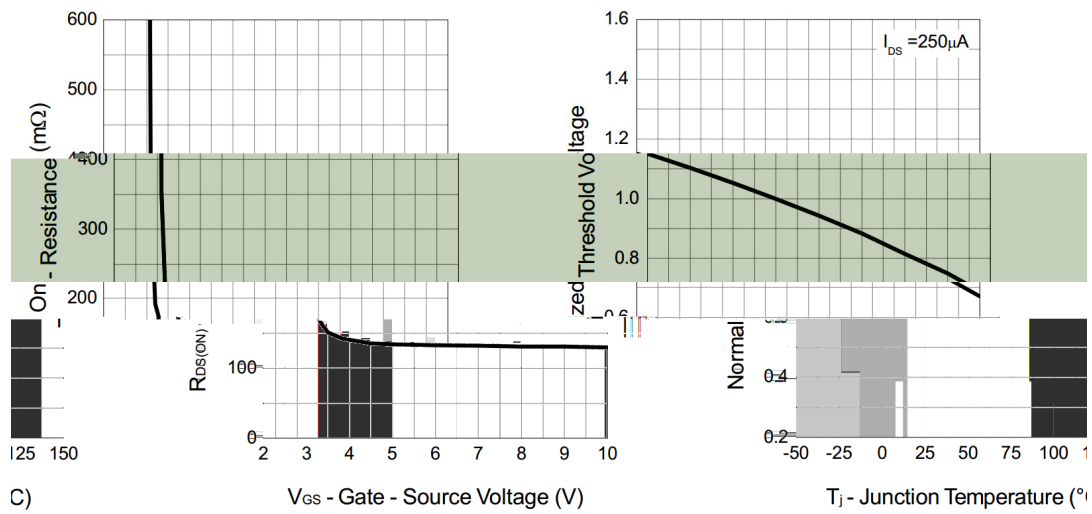


/ Package Dimensions

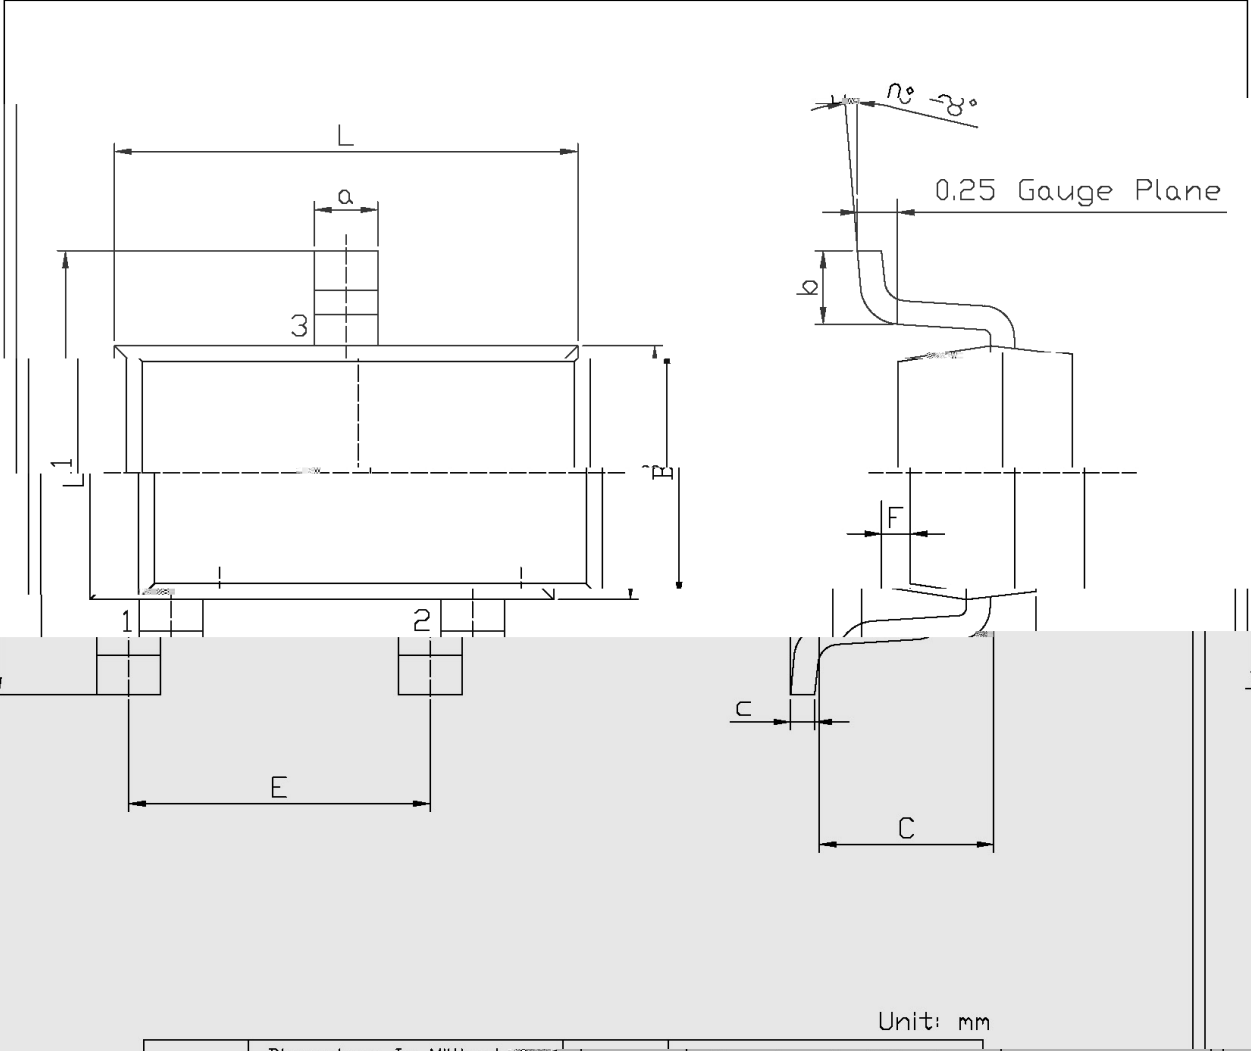


Dimensions in Millimeters		Dimensions in Millimeters	
1	2	3	4
5	6	7	8
9	10	11	12
13	14	15	16
17	18	19	20
21	22	23	24
25	26	27	28
29	30	31	32
33	34	35	36
37	38	39	40
41	42	43	44
45	46	47	48
49	50	51	52
53	54	55	56
57	58	59	60
61	62	63	64
65	66	67	68
69	70	71	72
73	74	75	76
77	78	79	80
81	82	83	84
85	86	87	88
89	90	91	92
93	94	95	96
97	98	99	100

/ Marking Instructions

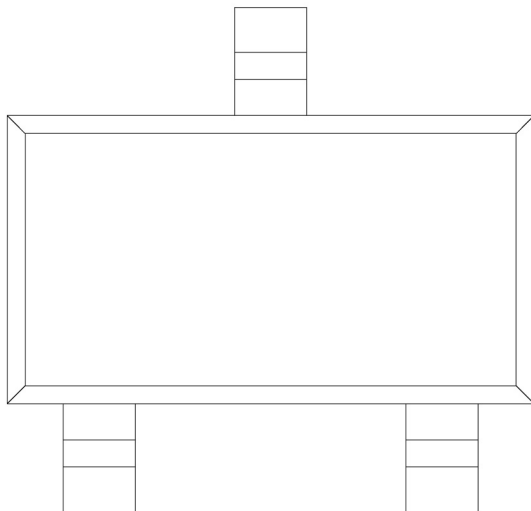

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

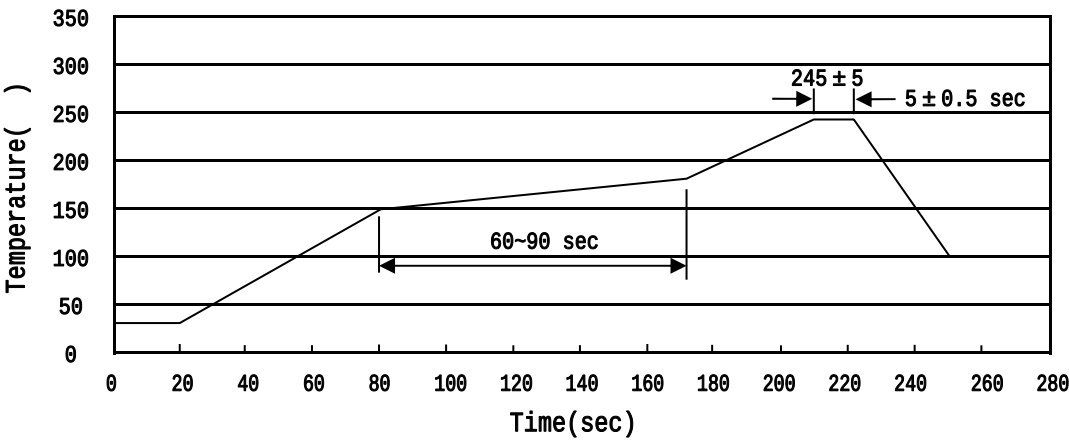

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices