



/ Revised record

版本	修订日期	有修订的页码	修订涉及的内容	拟制	审核
A	2019-10				
A	2021-3-16	ALL	BRC5P06MA 改型号 BRC5P06MC 该封装	黄超	庞隆基



/ Descriptions

塑封封装，道场效应管。

P


/ Features

低导通电阻，开关时间快，低导通电压，无卤产品。


/ Applications

PWM 应用与负载开关。

/ Equivalent Circuit



/ Pinning






/ Marking

--	--



/ Electrical Characteristic Curve

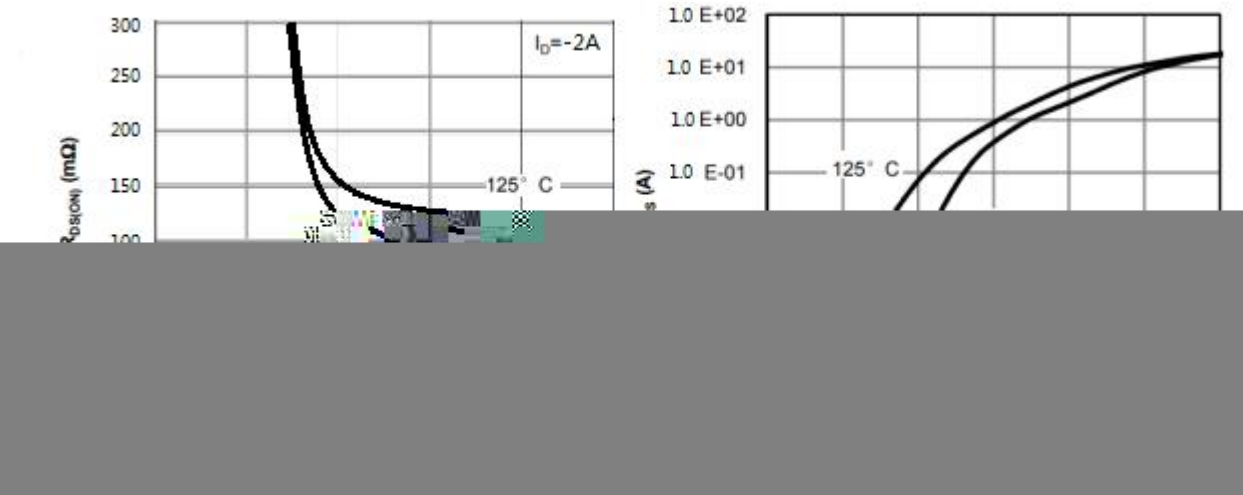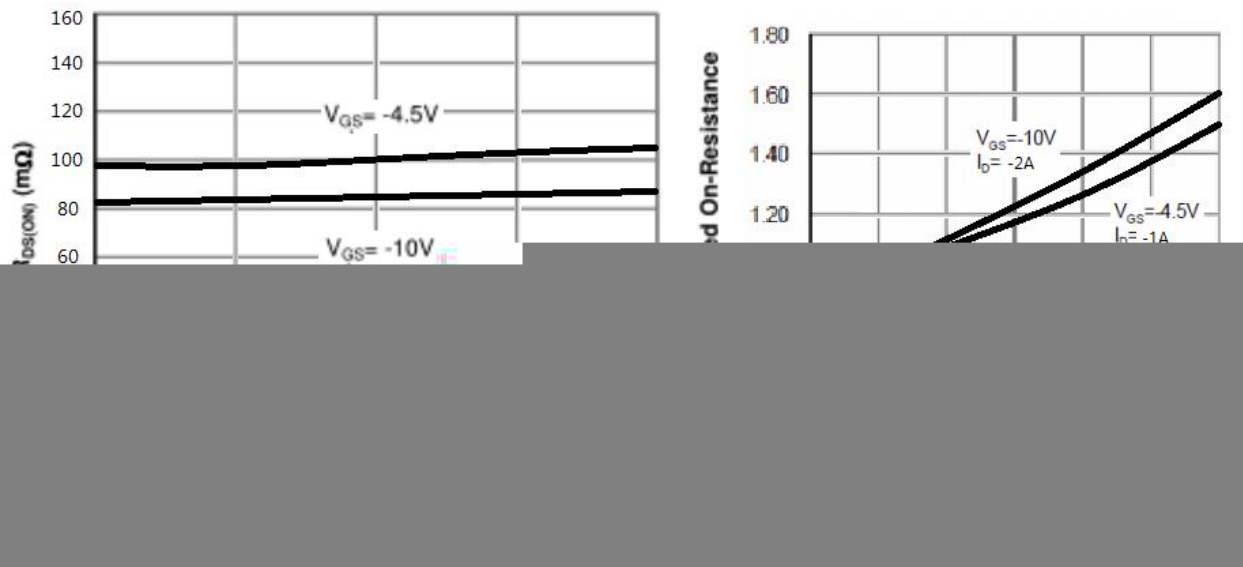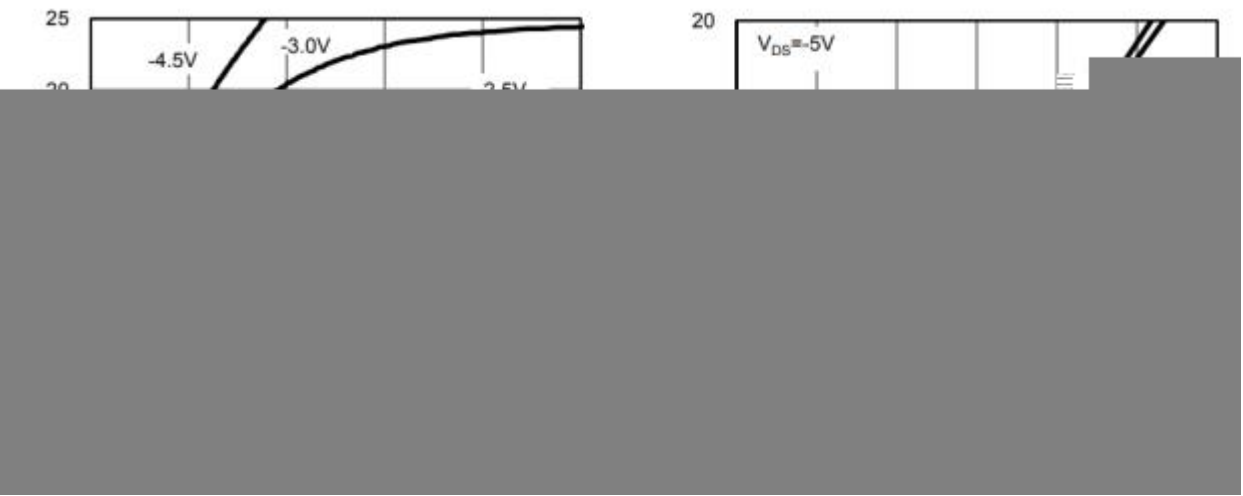

/ Electrical Characteristic Curve




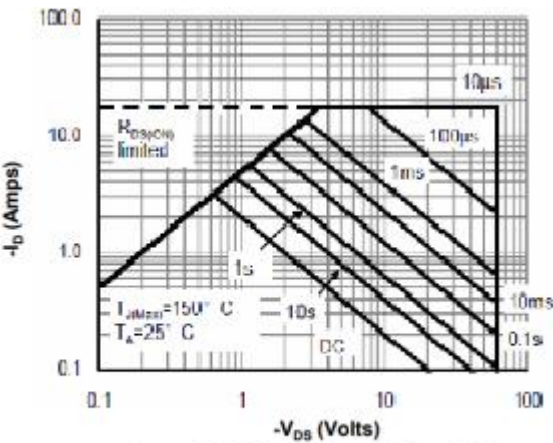


Figure 9: Maximum Forward Biased Safe Operating Area

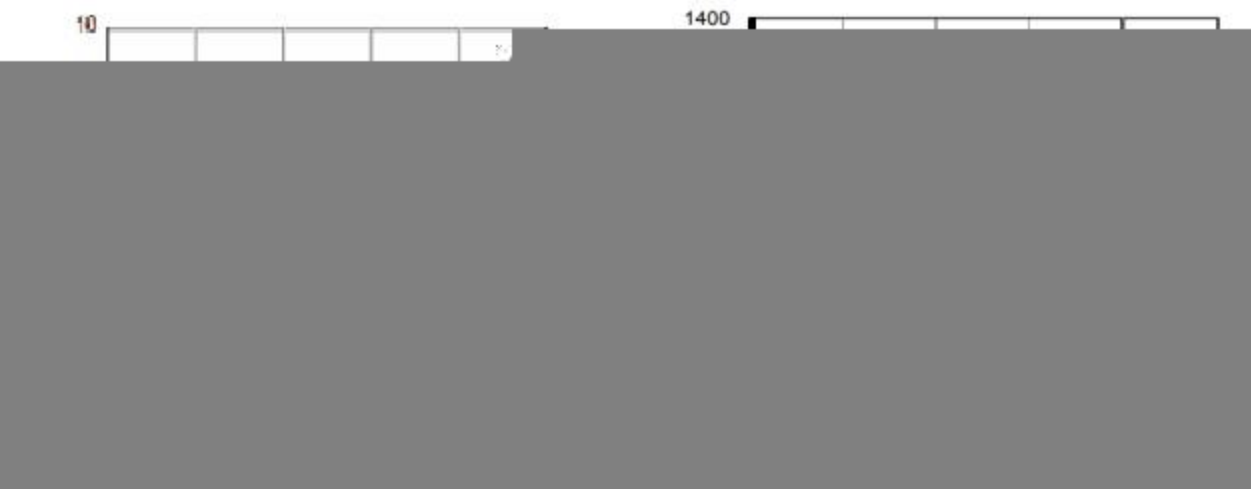

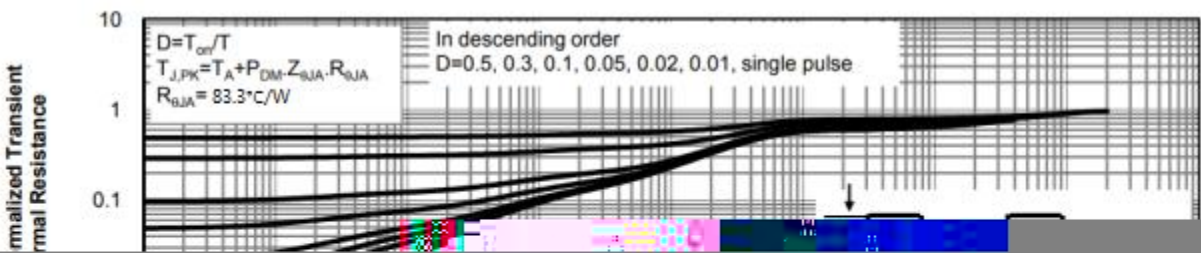


/ Marking Instructions

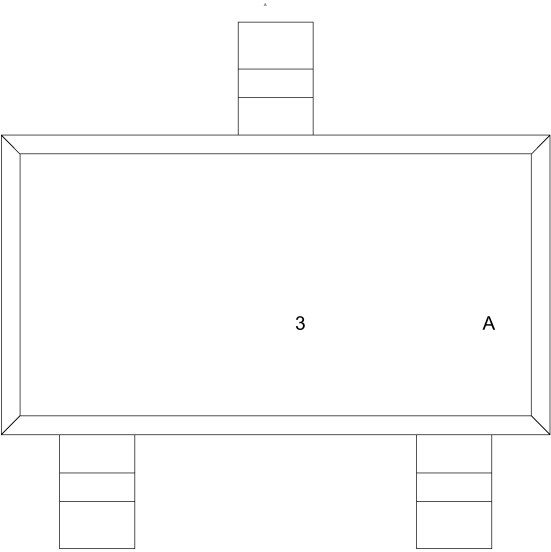



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

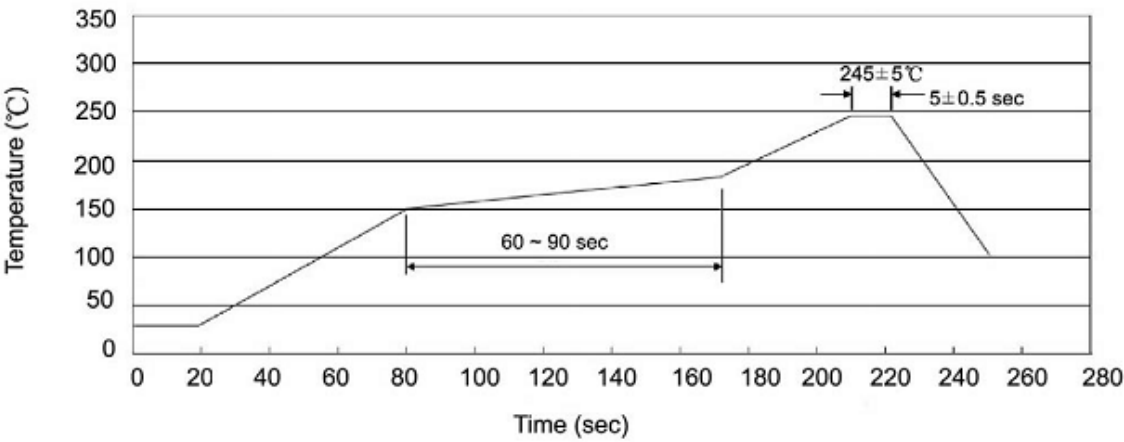

..... °C

..... ± ± ± °C ±

.....