


/ Descriptions

/ Features


$\leq \Omega \quad \Omega$

/ Applications

/ Equivalent Circuit



/ Pinning

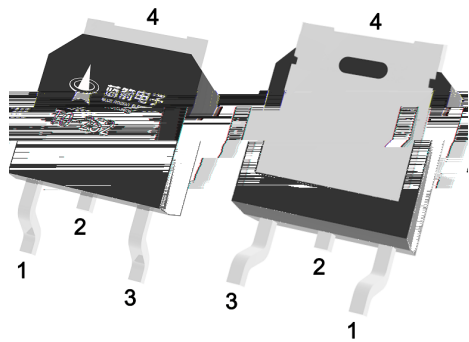

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω


/ Electrical Characteristics(Ta=25)

		Ω				
		μ				

/ Electrical Characteristic Curve

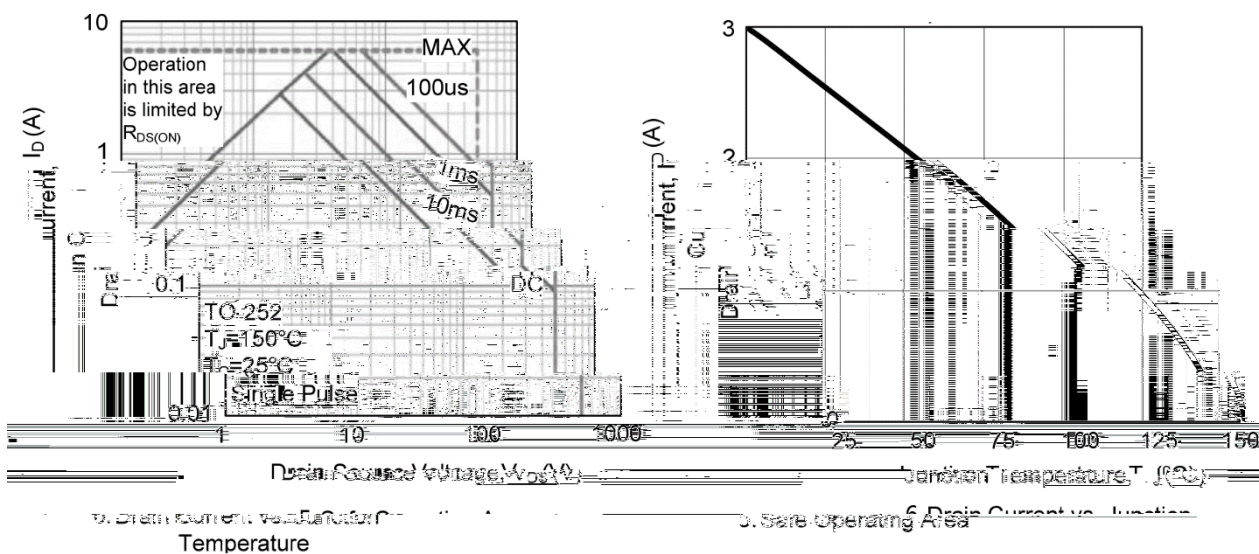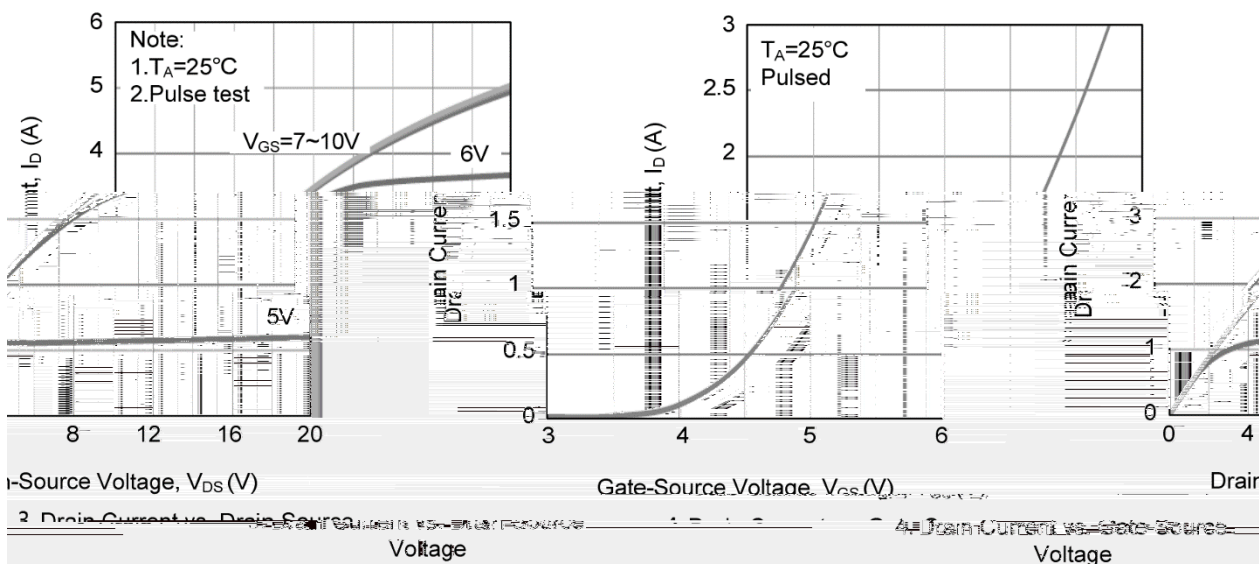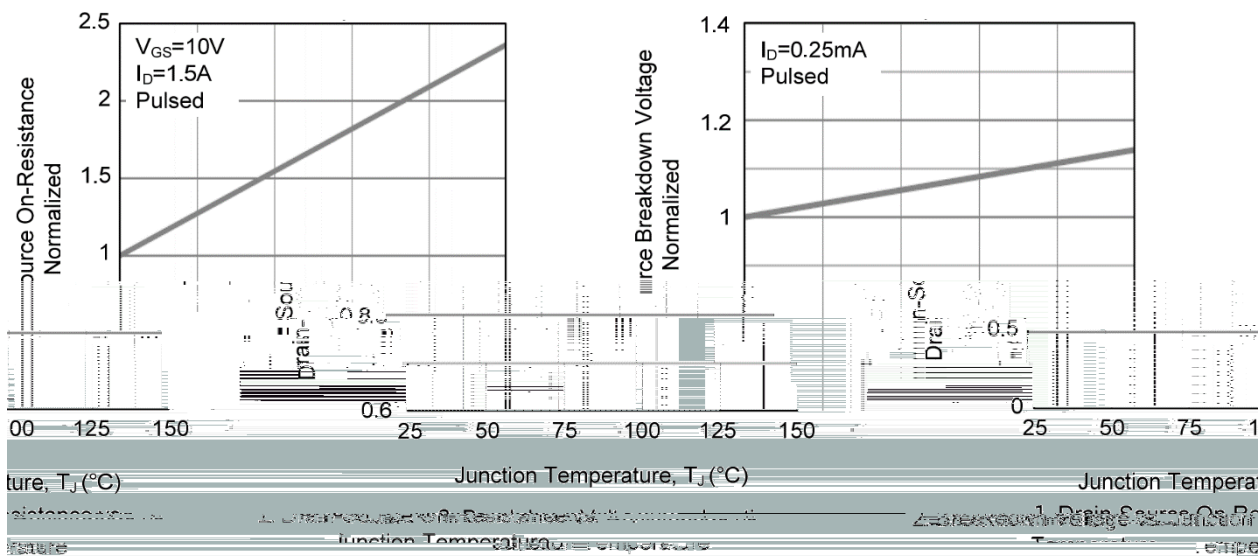

/ Package Dimensions

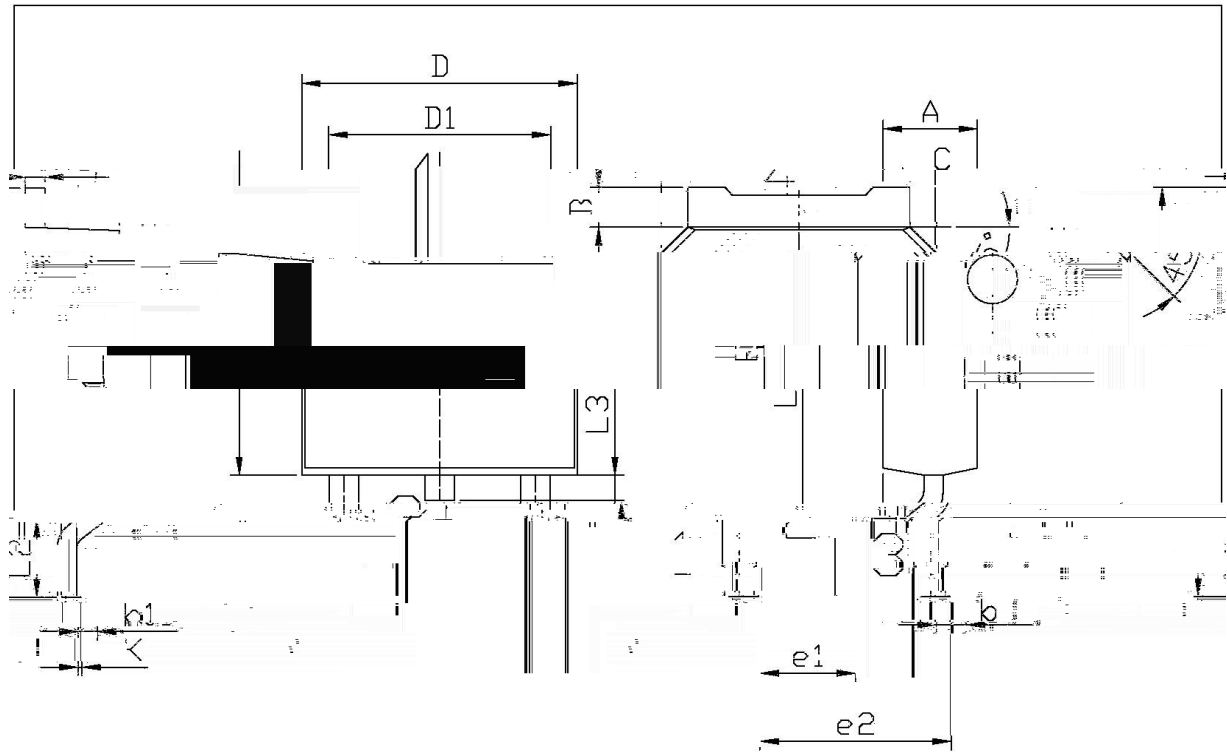


单位：mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
e1	2.24	2.34	B	0.95	1.2
e2	4.43	4.73	b	0.70	0.8
L1	9.85	10.35	b1	0.45	0.58
L2	0.45	0.55	L3	6.45	6.75
L3	0.60	0.90	D1	6.45	6.75
K	0.00	0.10	D1	6.45	6.75

T0-252

/ Marking Instructions

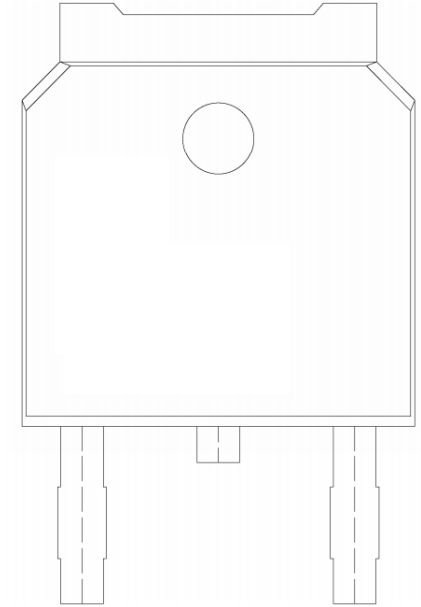

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

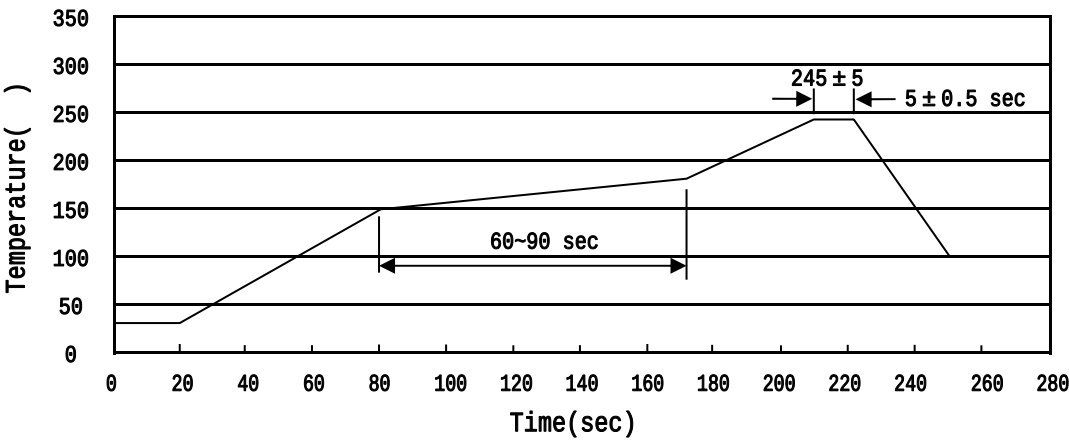

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices