


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

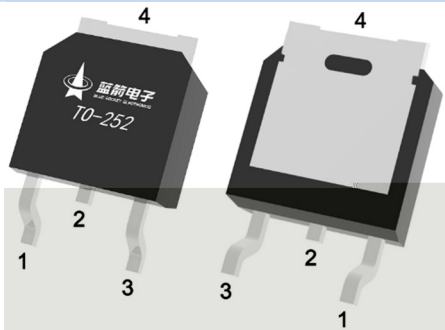


/ Marking

/ Absolute Maximum Ratings(Ta=25)


			/W
			/W

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

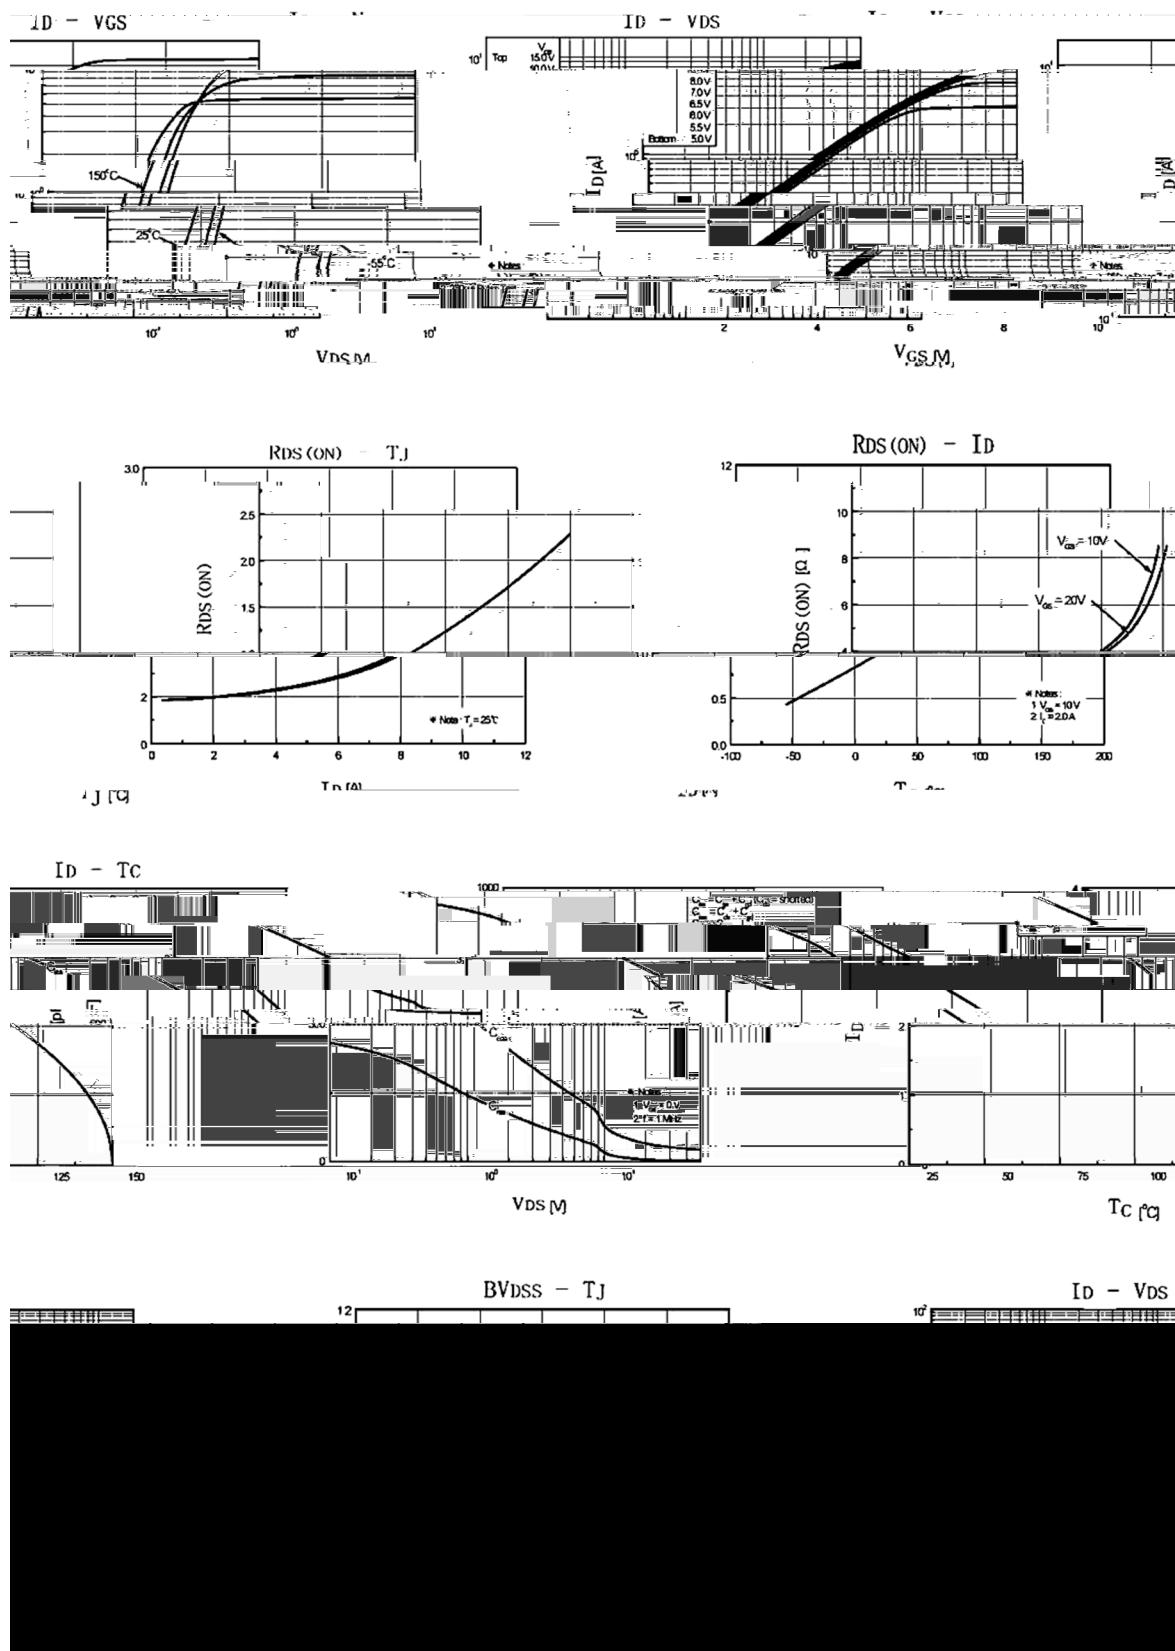


/ Package Dimensions

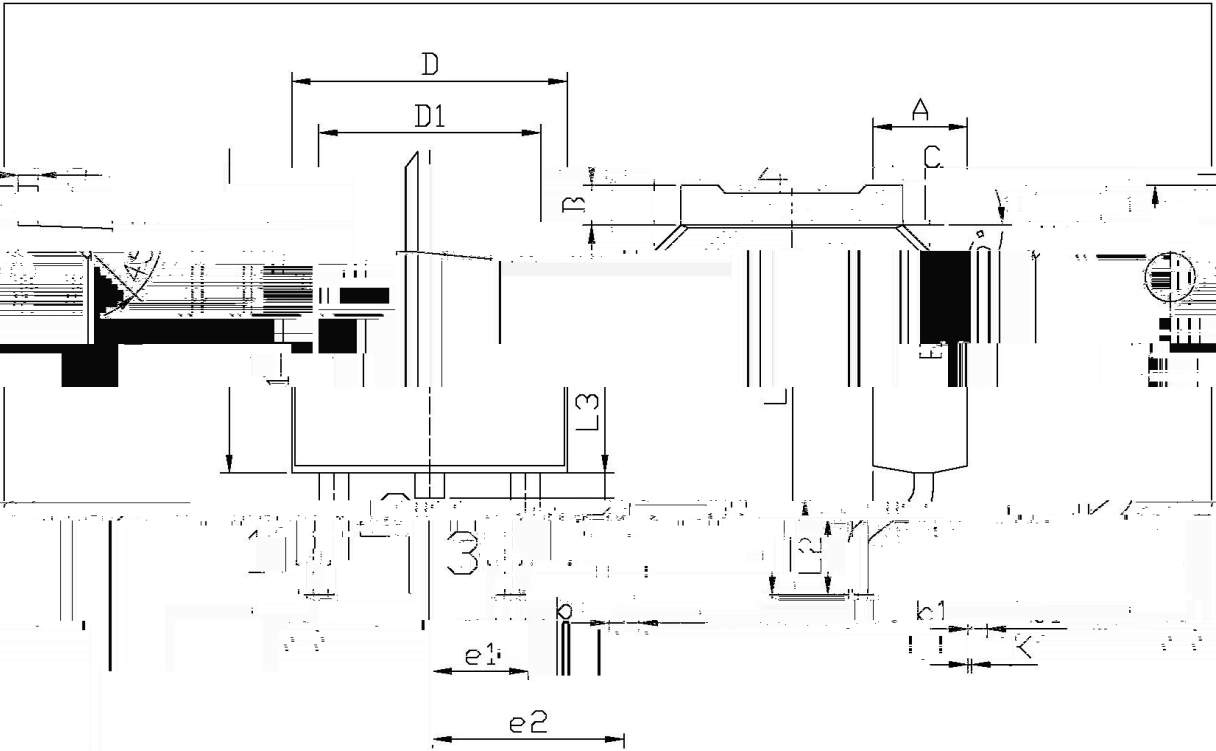

单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	5.95	6.25	A ₁	2.20	2.40
B	2.24	2.34	B ₁	0.95	1.25
C	4.10	4.30	C ₁	0.70	0.90
D	9.85	10.35	D ₁	0.45	0.55
L3	12.00	15.00	L ₃	1.70	2.00
e1	0.60	0.90	e ₁	6.45	6.75
e2	0.60	0.90	e ₂	5.10	5.50

/ Marking Instructions

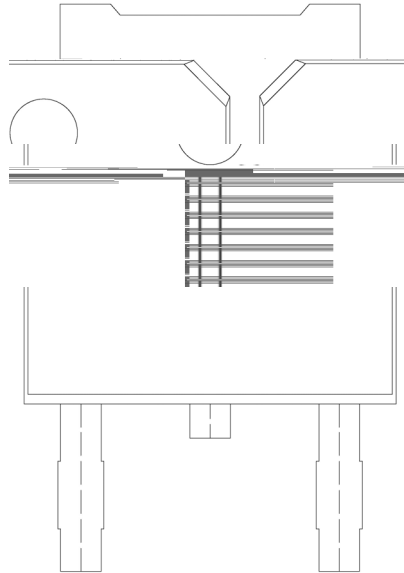

4N65

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices