

[illegible]

/ Descriptions


/ Features

$R_{DS(on)}$ C_{rss}


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning



/ Marking




	°C		
	°C		
			°C
			°C
			°C

		°C				




°C


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

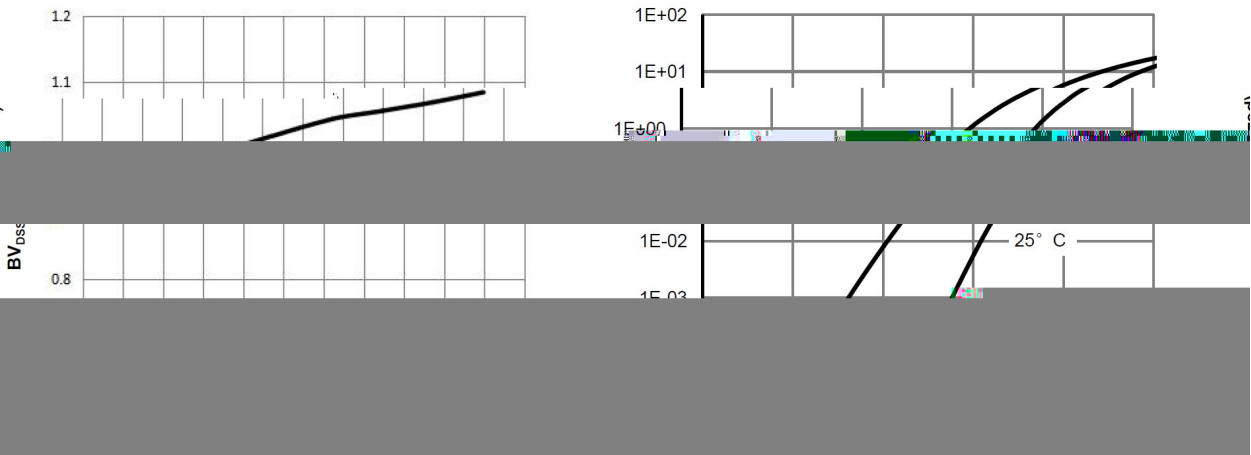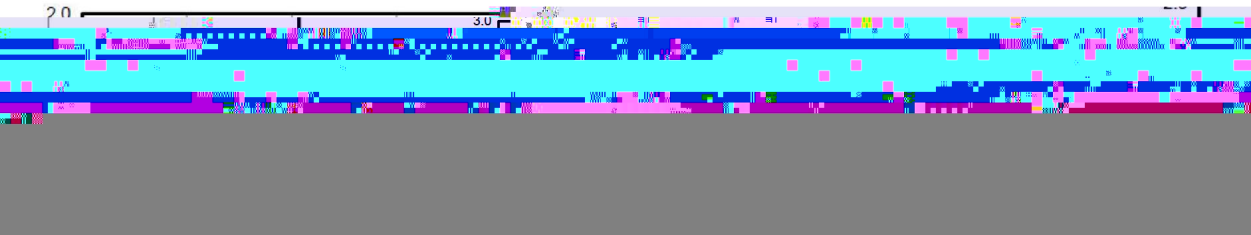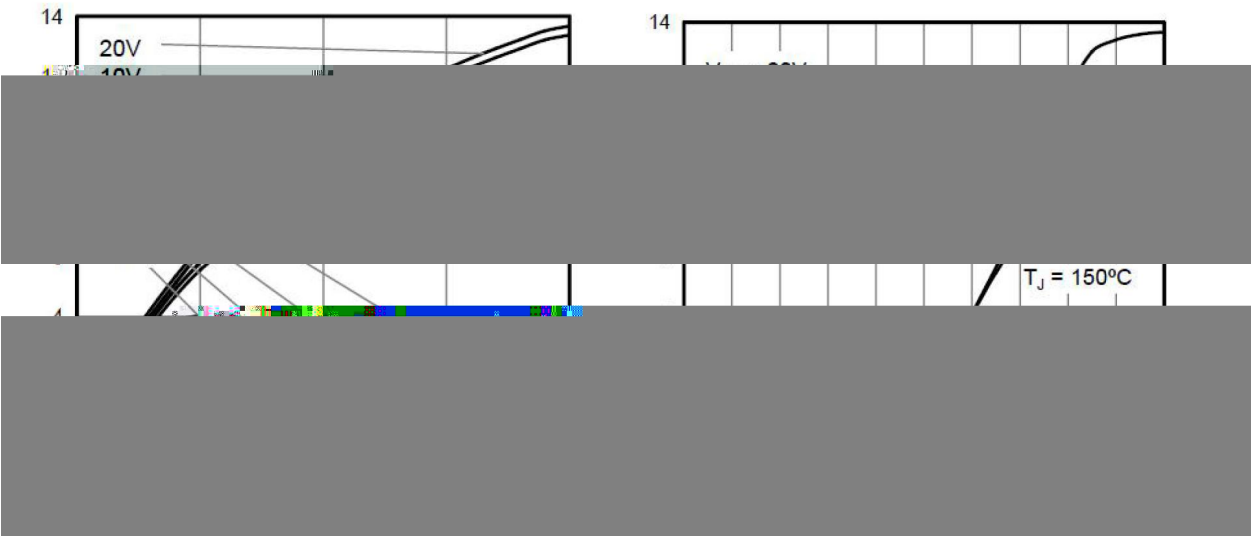


/ Electrical Characteristic Curve

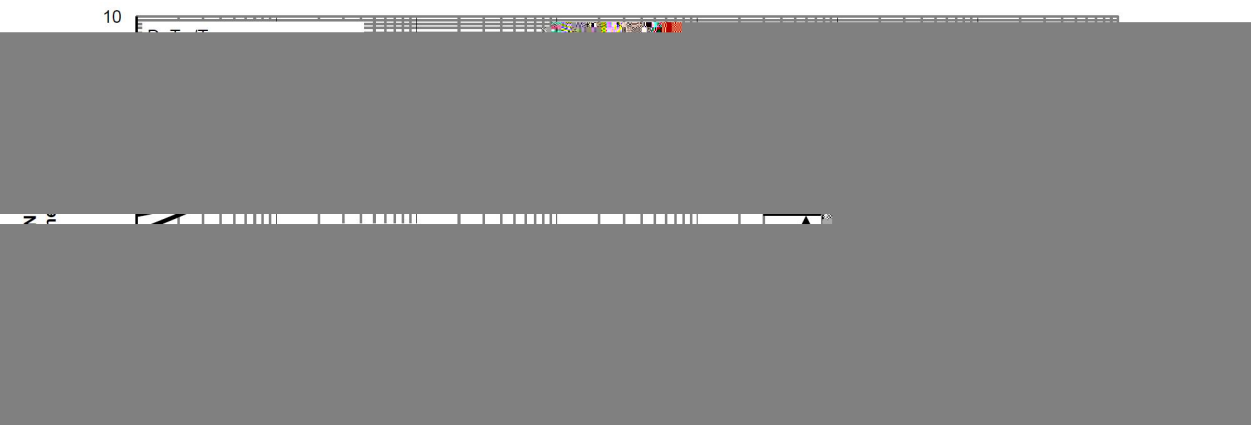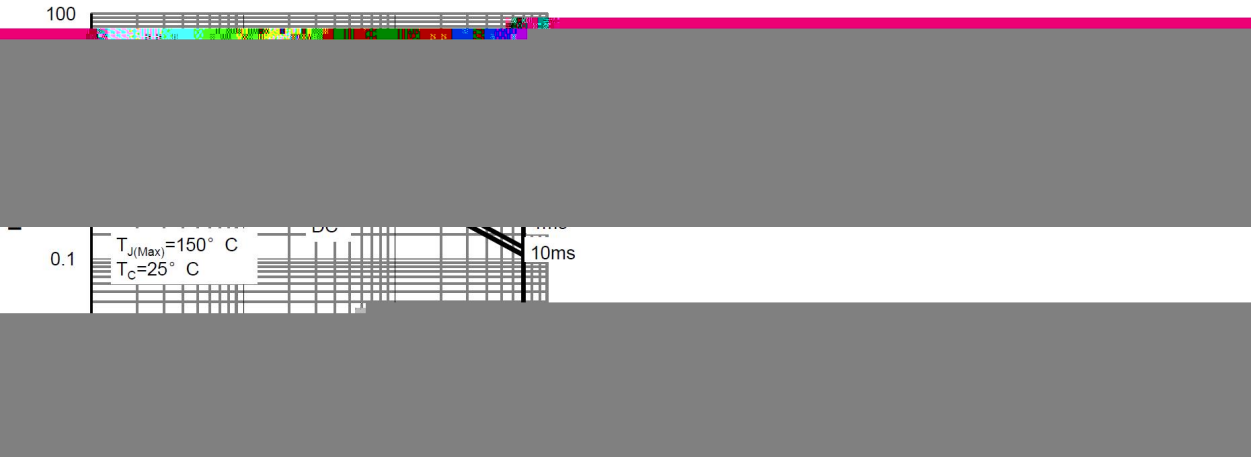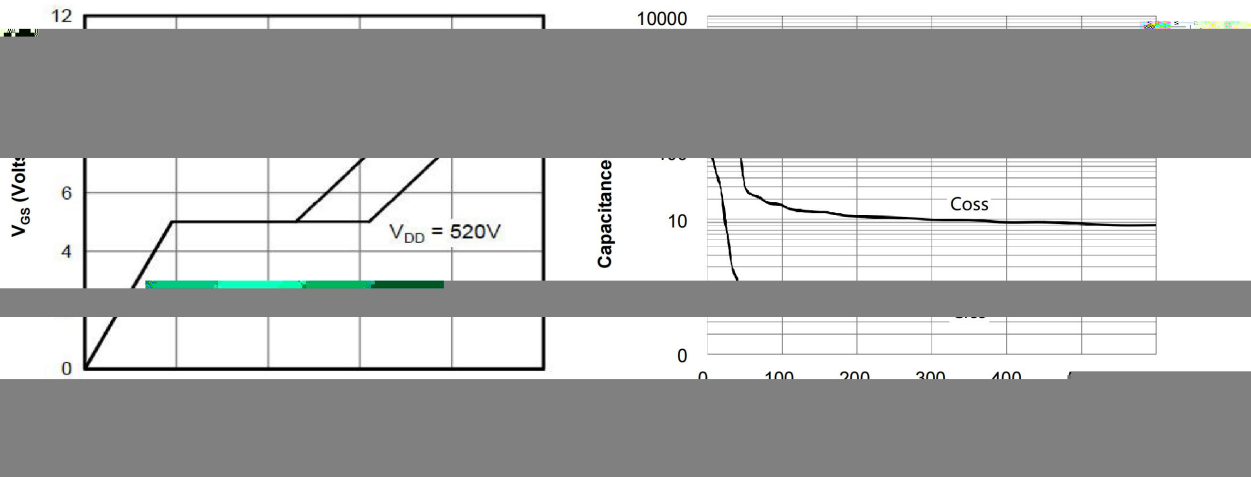

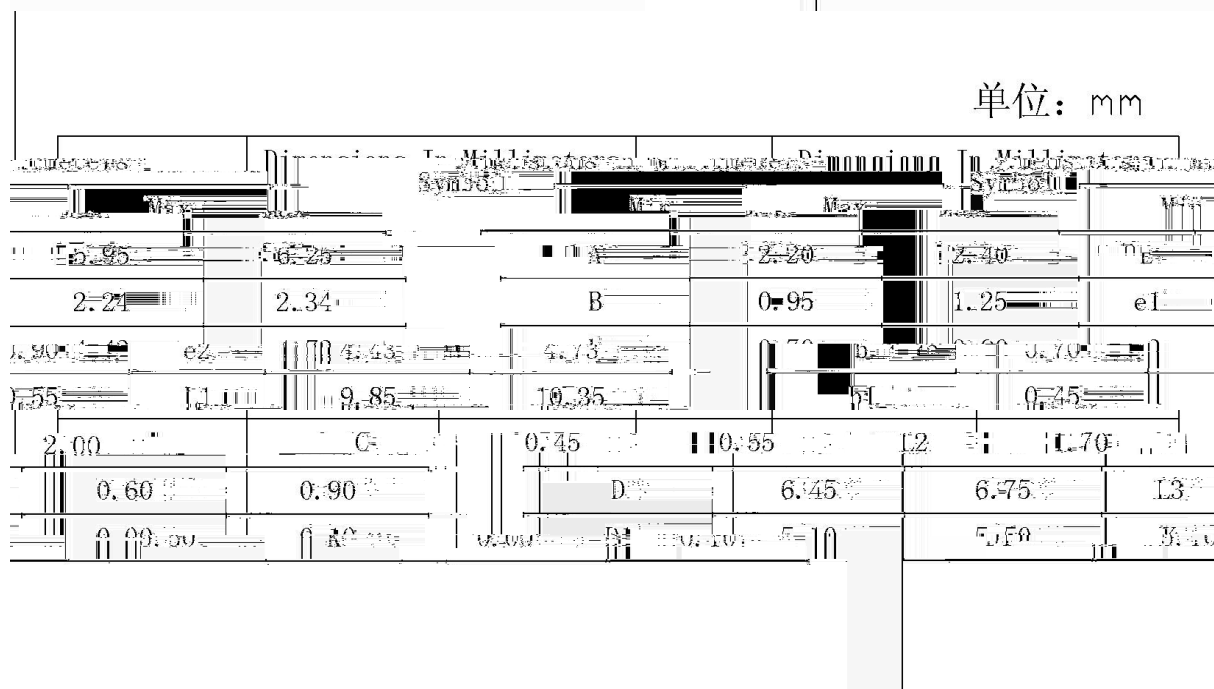

6 8

/ Marking Instructions

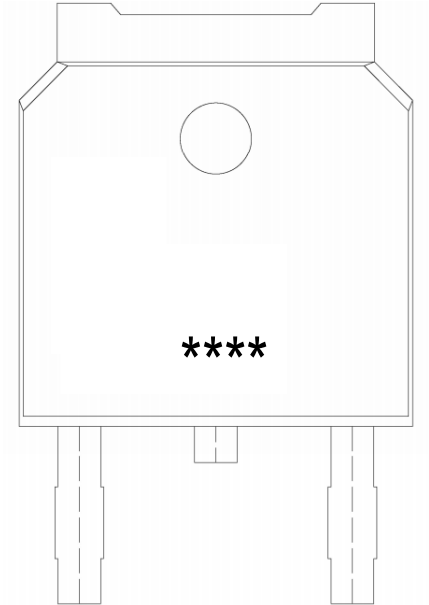

65R1K0C

() /

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

± °C

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 只/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱