


BRD65R280C



DATA SHEET

/ Revised record

[illegible]

/ Descriptions

/ Features


$R_{DS(on)}$

C_{rss}

/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning




/ Marking


参数	符号	数值	单位
----	----	----	----

参数	符号	测试条件	最小值	典型值	最大值	单位

/ Electrical Characteristic Curve

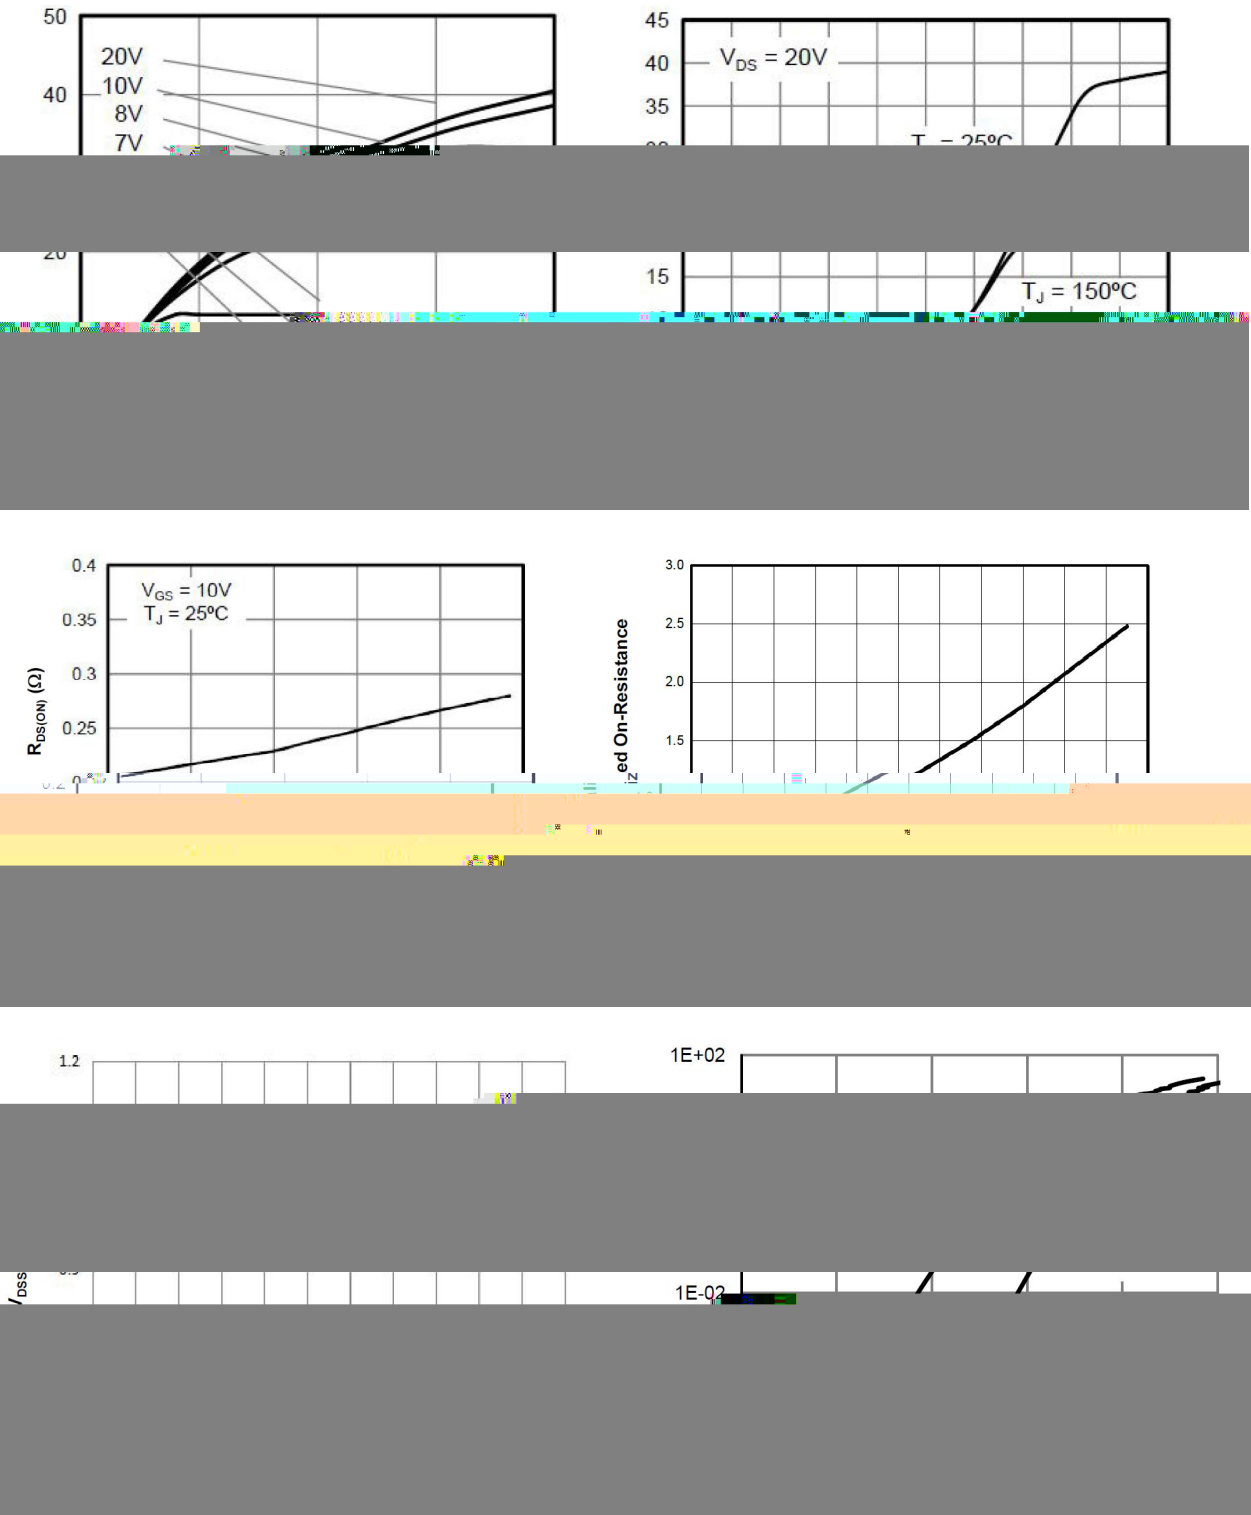



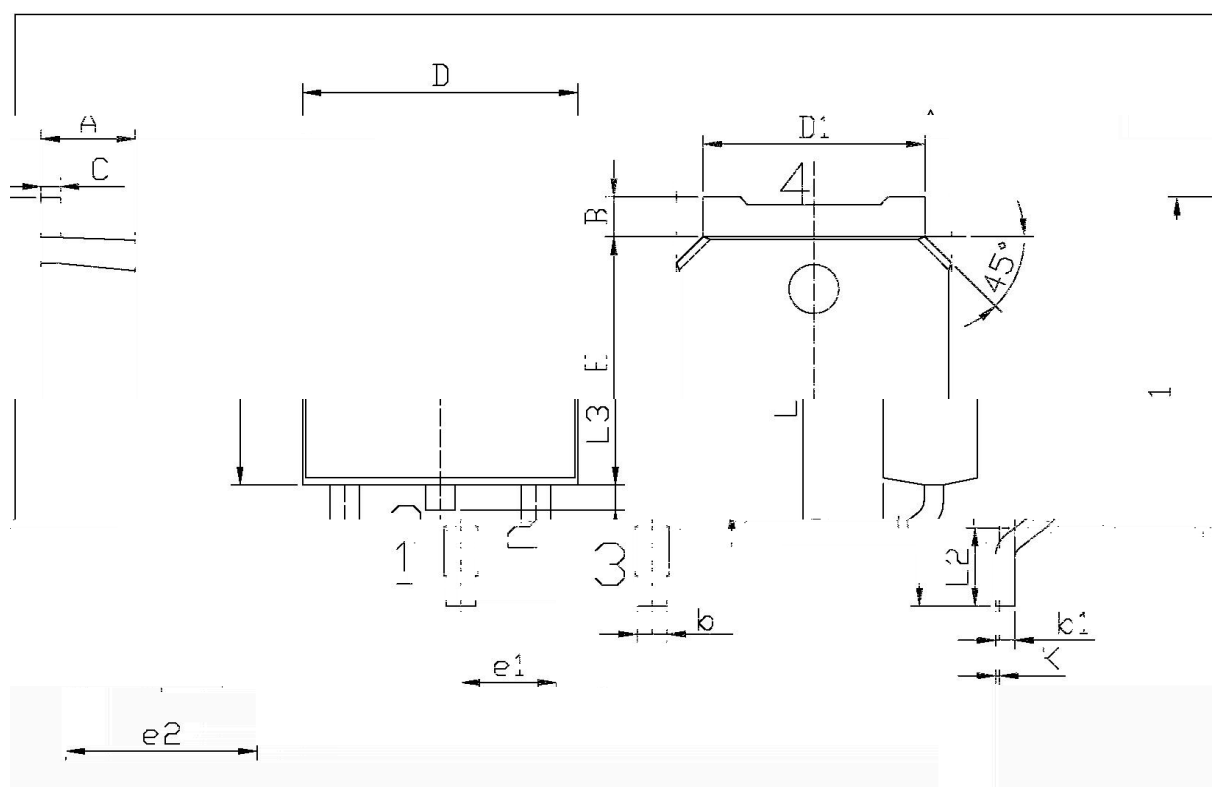


单位: mm

Dissipatio			Dissipatio		
Symbo			Symbo		
A=	2.20	2.40	5.25	5.625	
B=	0.95	1.25	e1	2.24	2.34
1.45	1.13	0.60	0.60	0.60	0.60
2.85	10.35	0.45	0.55	1.1	
2.00	0.45	0.55	1.2	1.70	
L3	0.60	0.90	D	6.45	6.75
0.00	0.00	0.00	0.00	0.00	0.00

TN-252

/ Marking Instructions

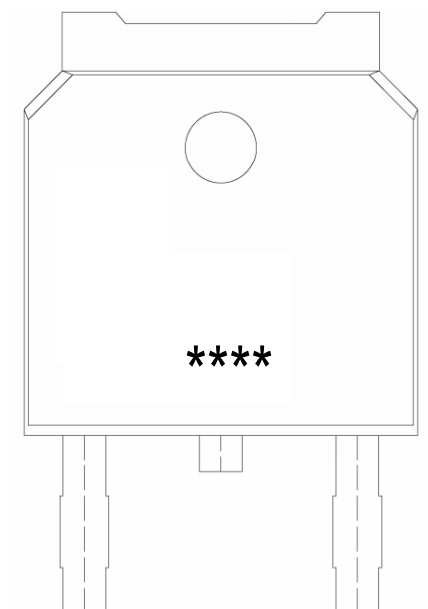

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

□
□

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box			