


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

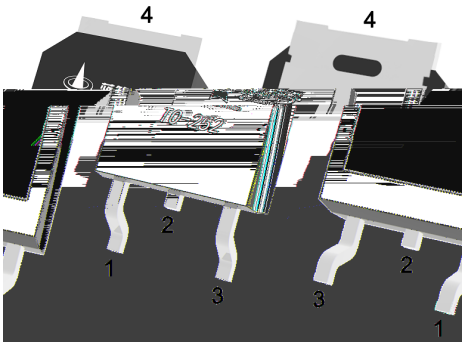

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				


/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

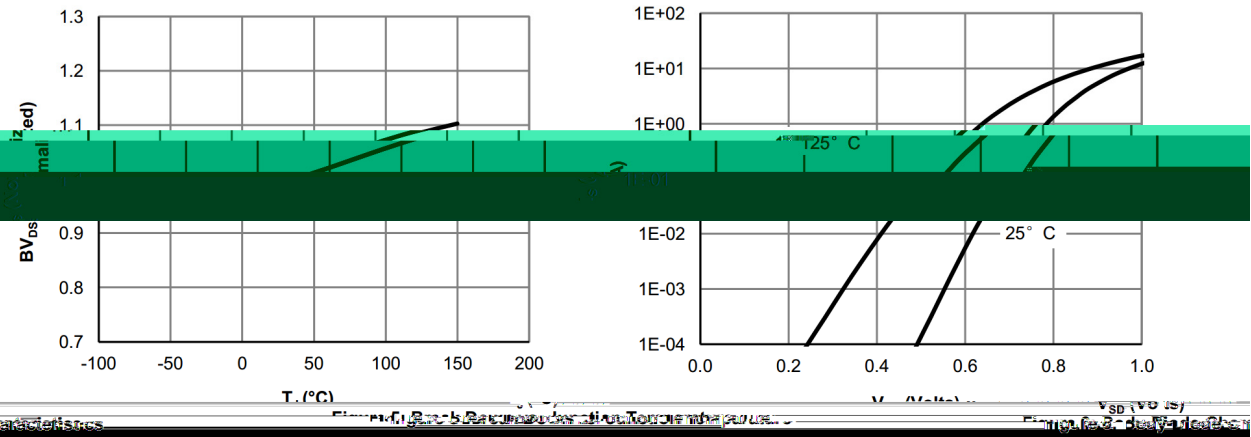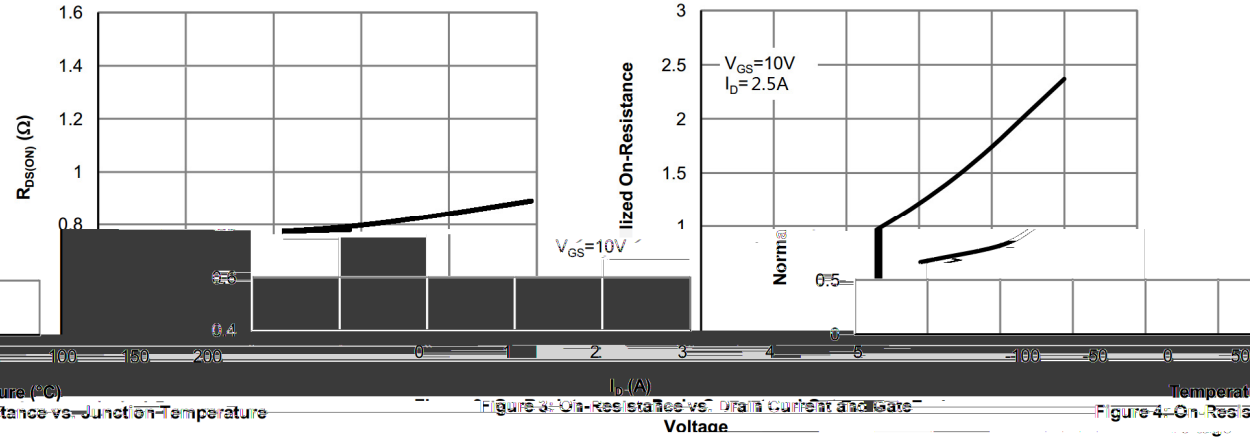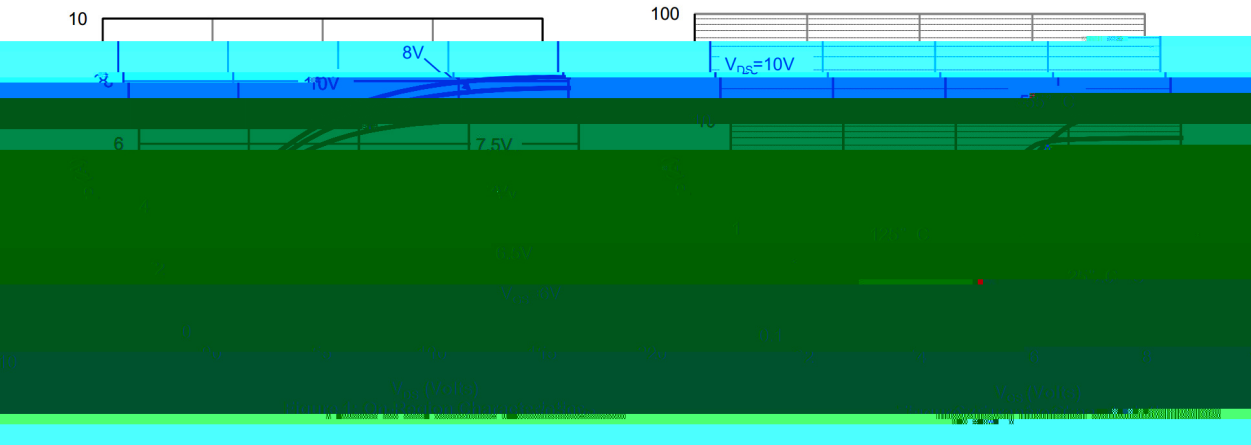

/ Package Dimensions

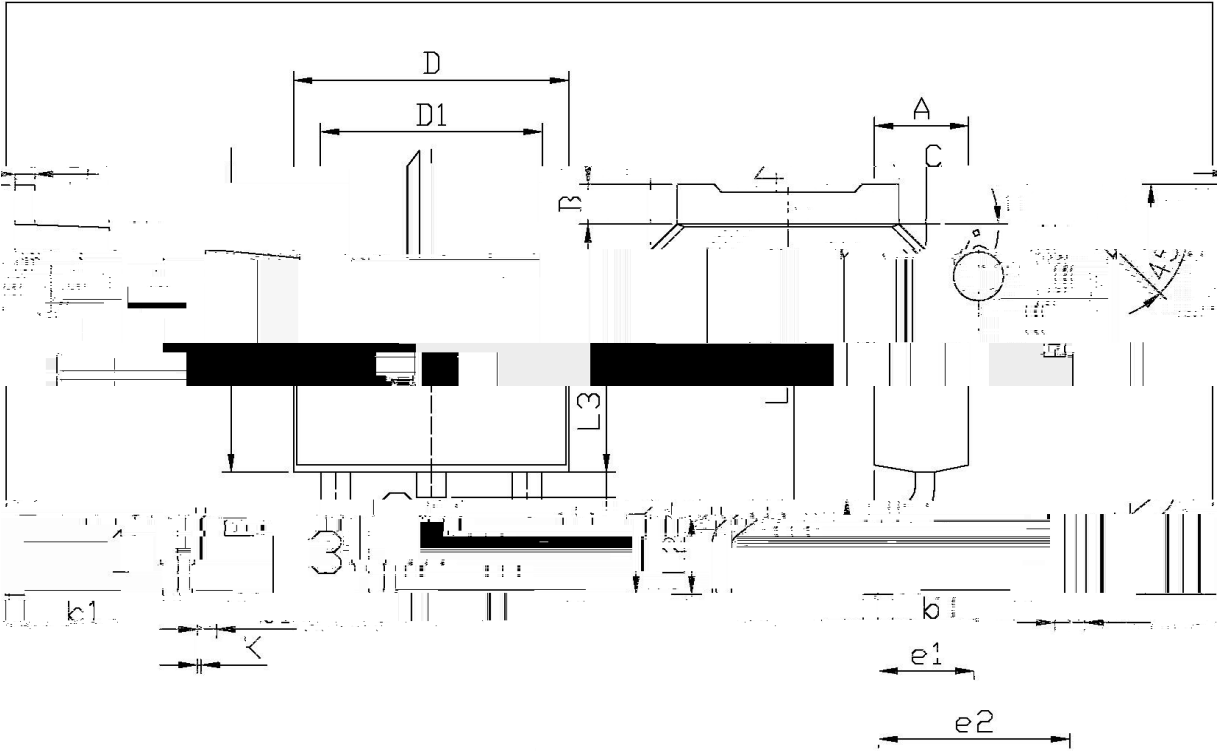


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	B	0.95	1.05
C	2.24	2.34	D	6.45	6.75
D	6.45	6.75	D1	5.10	5.40
L3	9.85	10.35	L4	0.45	0.55
k1	0.55	0.65	k	0.50	0.60
b	0.70	0.80	e1	1.25	1.35
e2	2.25	2.35	e3	2.25	2.35

T0-252

/ Marking Instructions

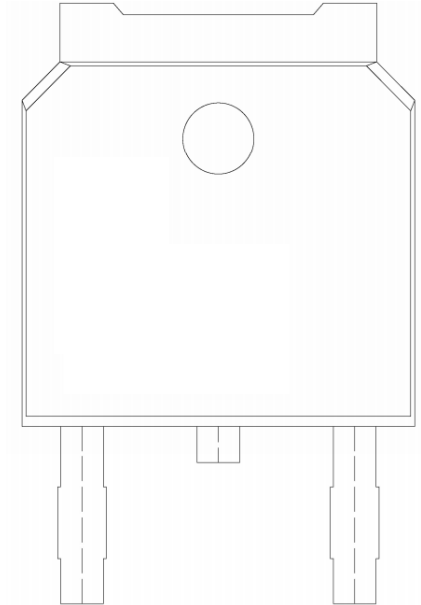

() /

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.