


/ Descriptions

SOT-363                  PNP+NPN


/ Features

/ Applications

/ Equivalent Circuit

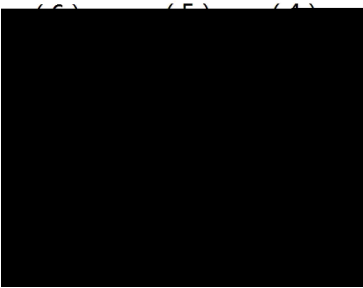

/ Pinning

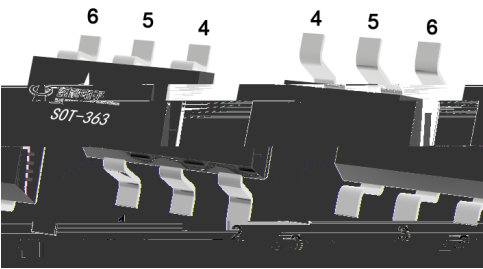

/ hFE Classifications & Marking

/ Absolute Maximum Ratings(Ta=25 ) (NPN)

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |


/ Absolute Maximum Ratings(Ta=25 ) (PNP)

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |


|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |

|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |


## / Electrical Characteristic Curve (NPN)

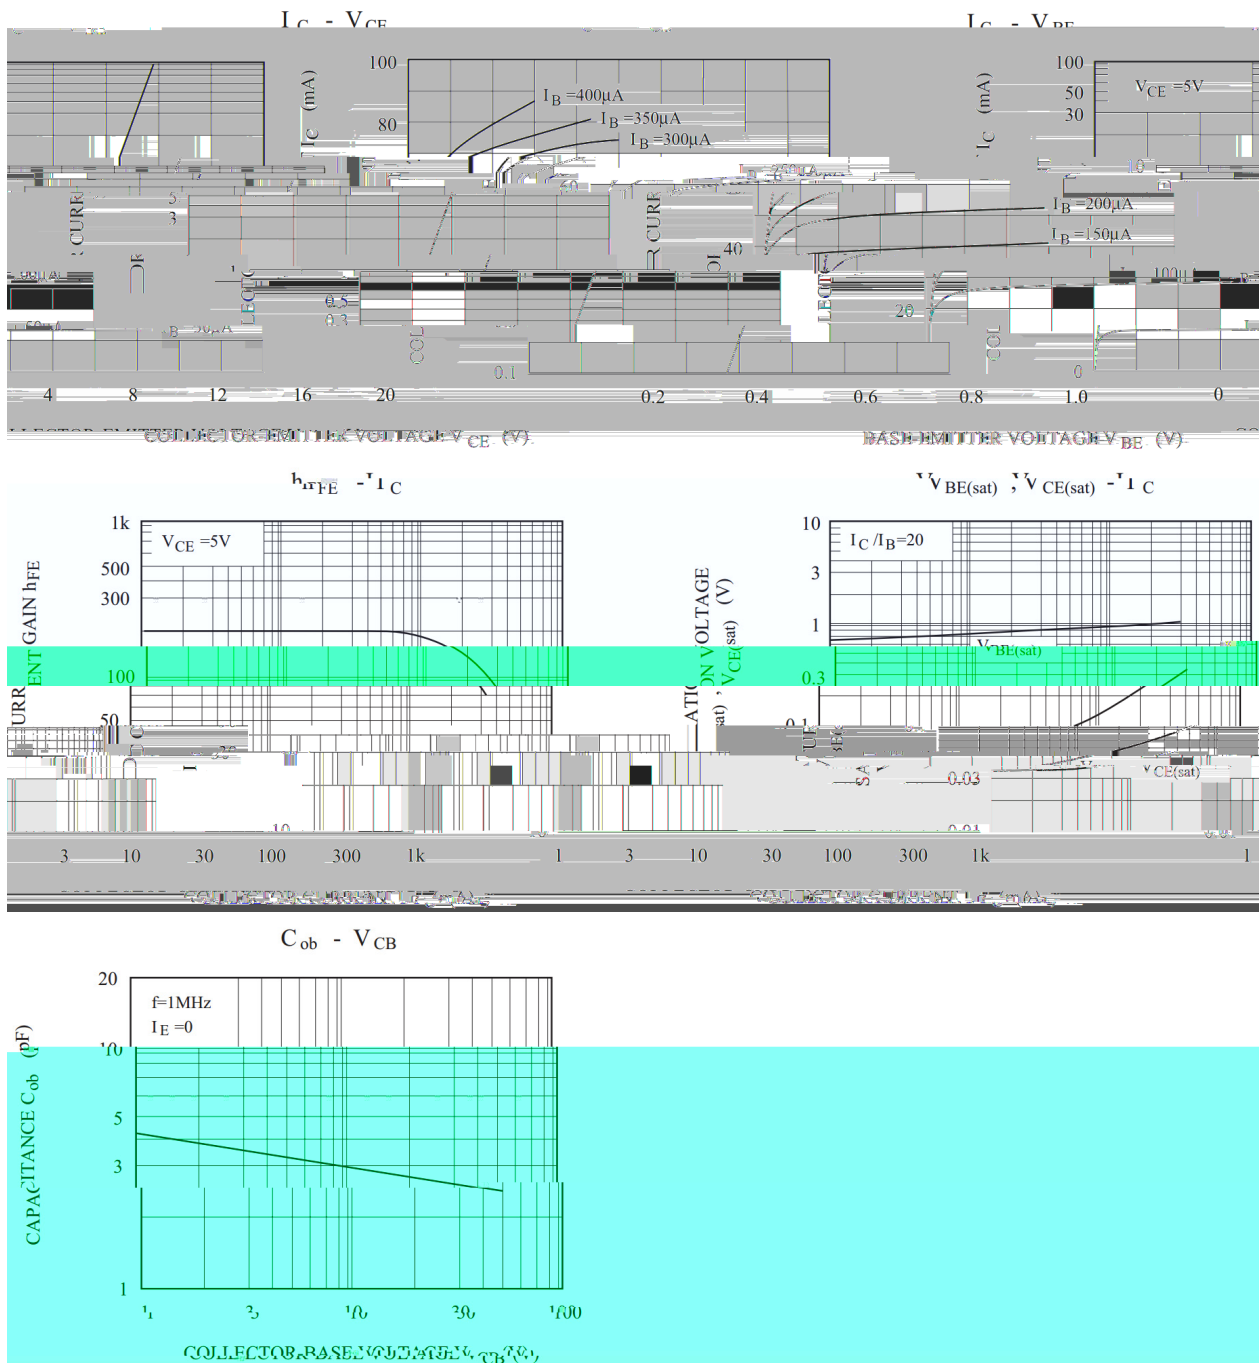


## / Electrical Characteristic Curve (PNP)

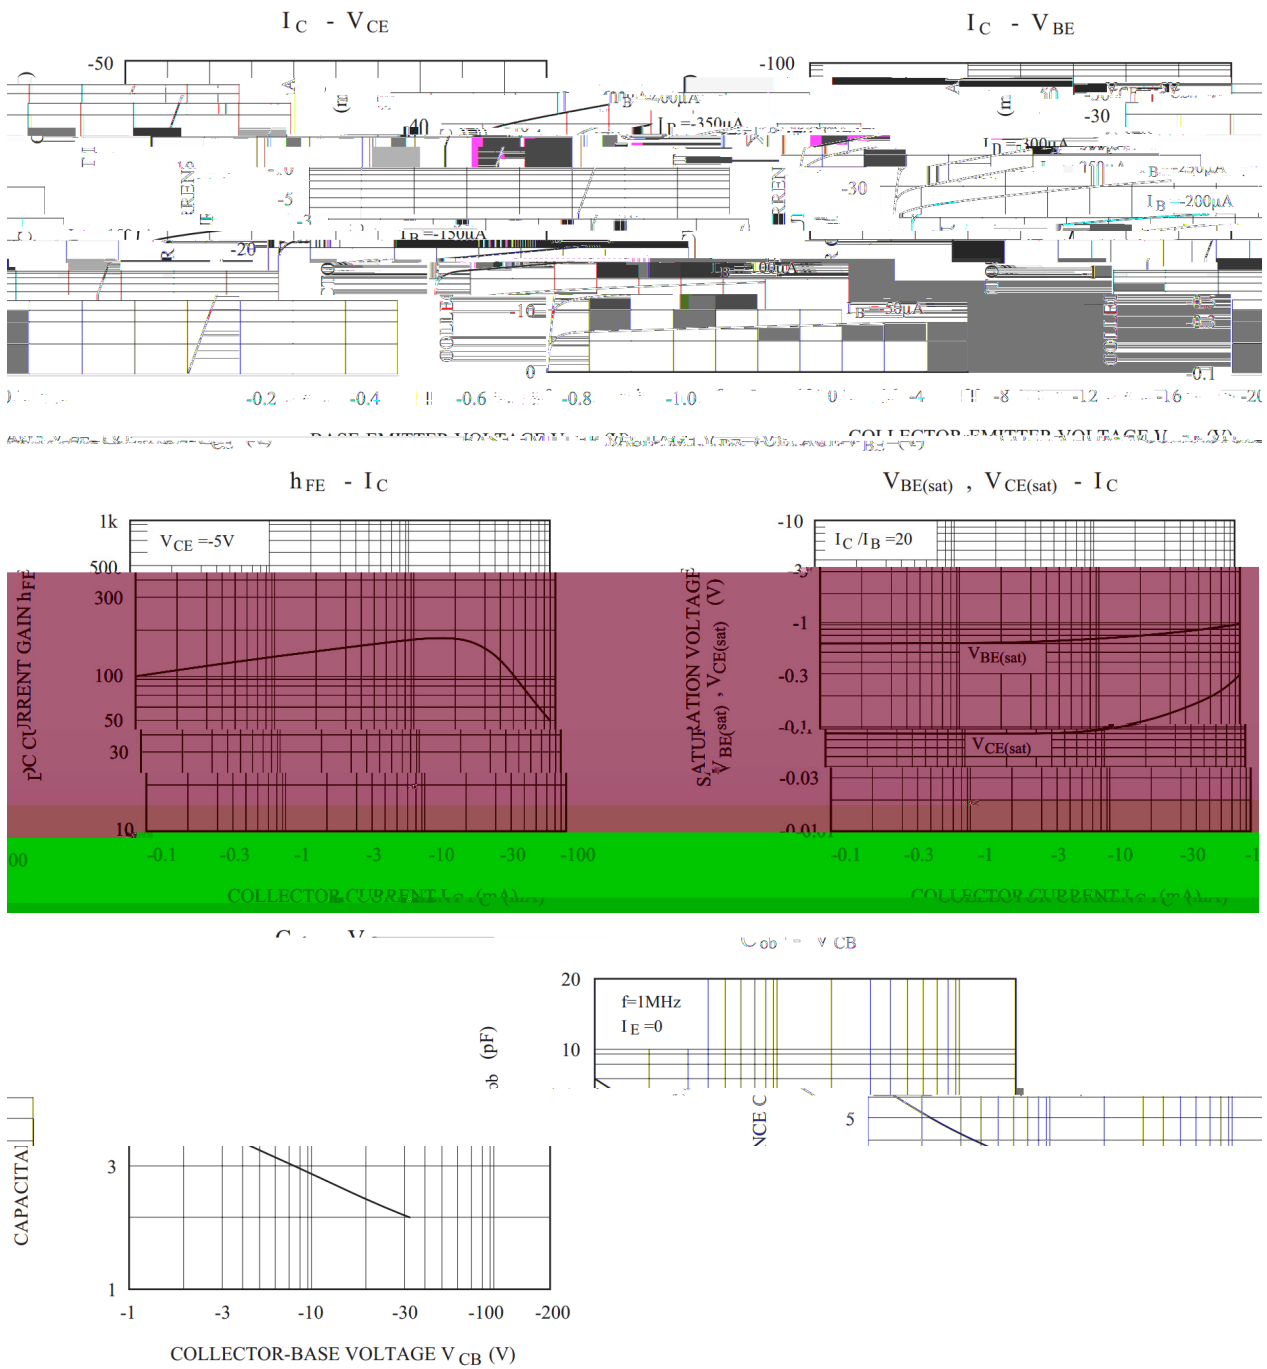

/ Package Dimensions

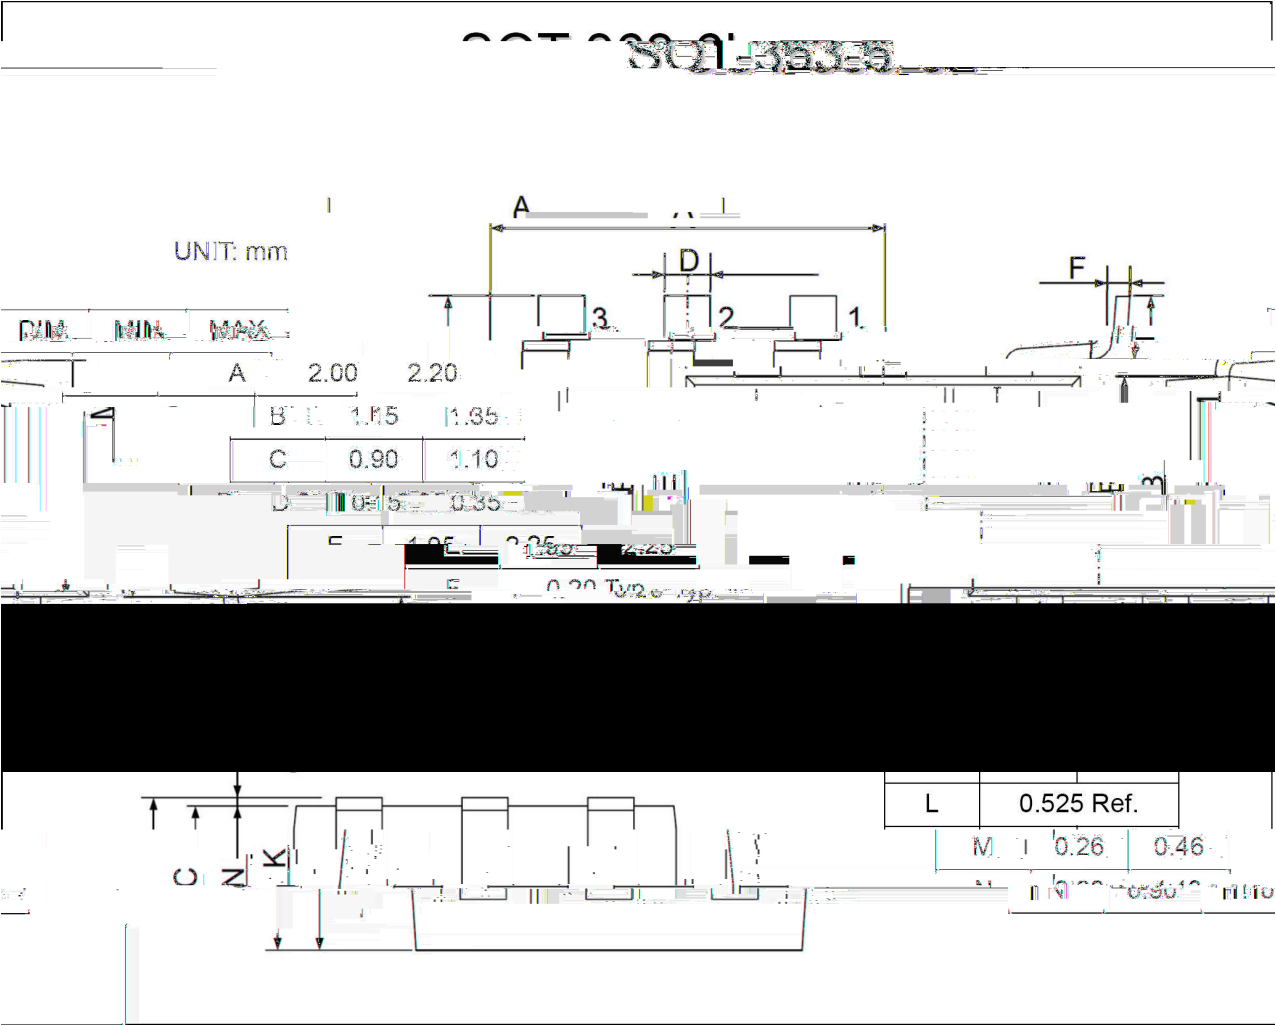

## / Marking Instructions

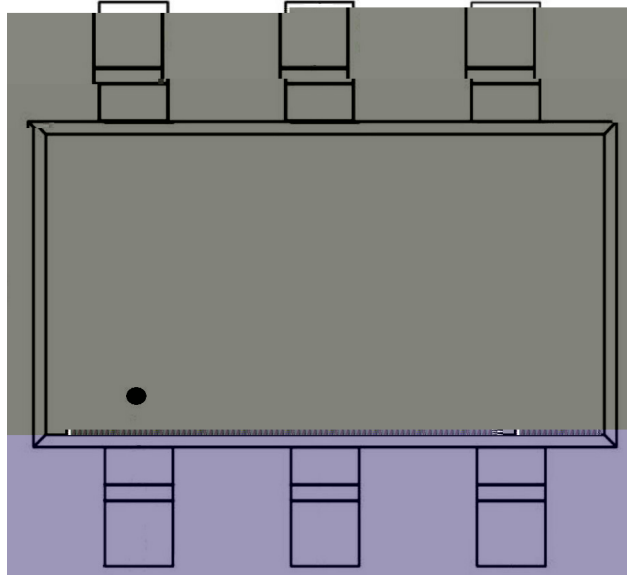

● “ 1 ”

FF


\*\*\*:

● “ 1 ” Pin

FF

\*\*\*:

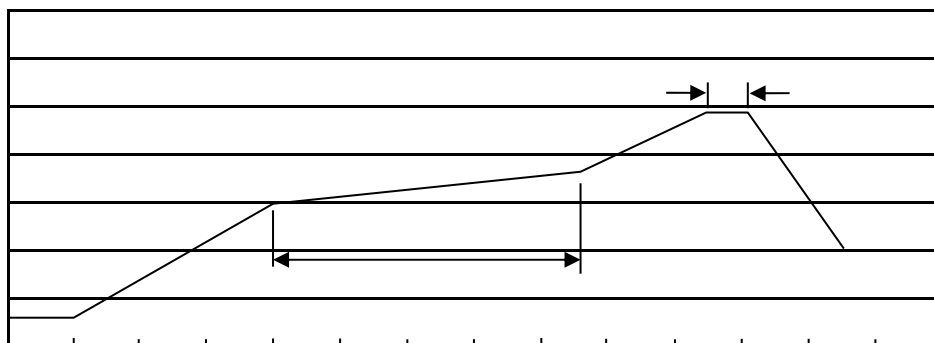

 $\pm$ 

### / Resistance to Soldering Heat Test Conditions

 $\pm$ / **Packaging SPEC.**

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |

## / Notices