

/ Descriptions

DFN1006-2L

ESD

DFN1006-2L Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

/ Features

1ns

20KV

IEC61000-4-2

4

ESD


AEC-Q101

Ultra small package, Response Time is Typically < 1 ns, ESD > 20 kV per Human Body Model,IEC61000-4-2 Level 4 ESD Protection, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

/ Applications

MP3

Suitable for cellular phones audio,MP3 players, Digital cameras, Portable devices, mobile telephone and other users, Meet the stringent requirements of automotive applications.

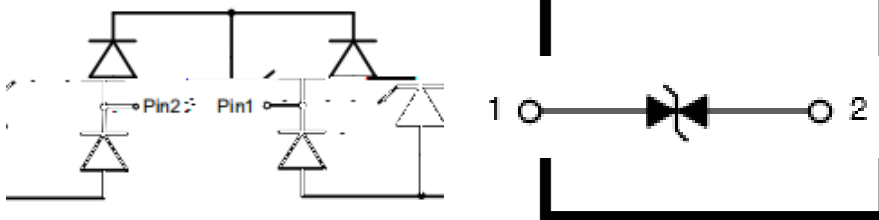/ Equivalent Circuit**/ Pinning****/ Marking**

See Marking Instructions.





Parameter	Symbol	Rating	Unit
Peak Pulse Power($t_p = 8/20\mu s$)	P_{PK}	56	W
Peak Pulse Current($t_p = 8/20\mu s$)	I_{PP}	4	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 20	KV
ESD according to IEC61000-4-2 contact discharge		± 20	
Junction temperature	T_J	125	
Storage Temperature	T_{STG}	-55~+150	

Definitions of electrical characteristics

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------


/ Electrical Characteristic Curve(Ta=25)

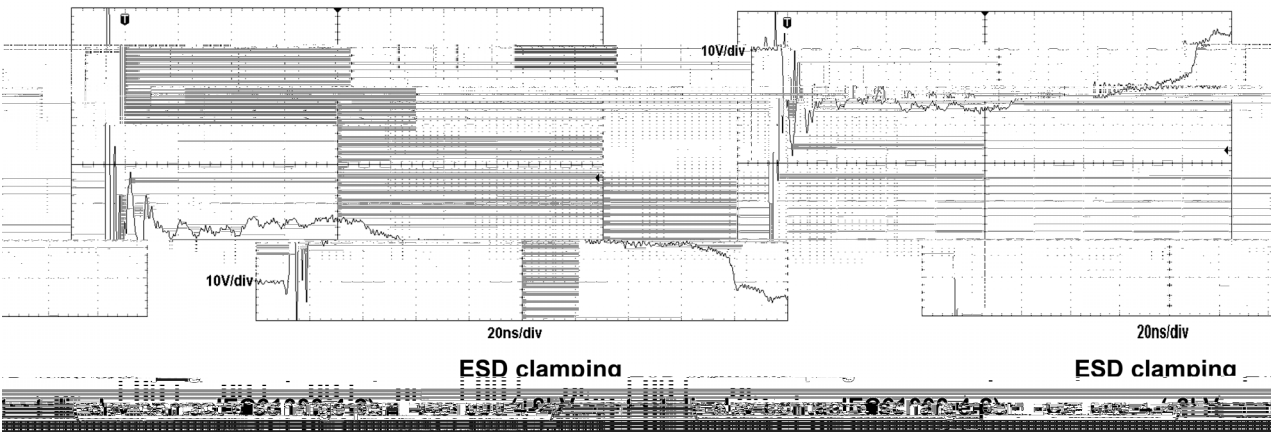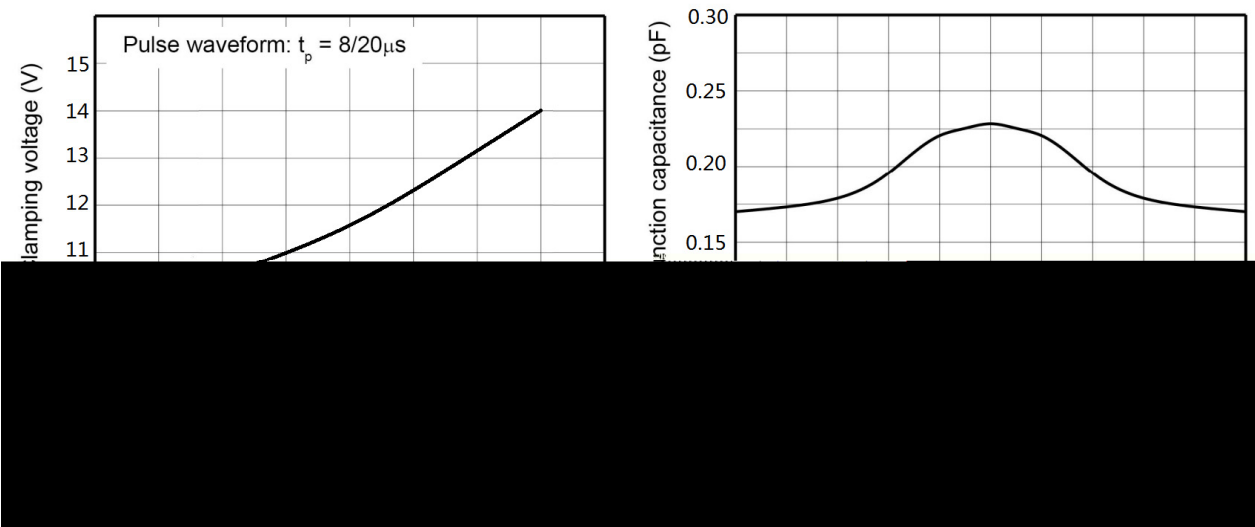

/ Package Dimensions


DFN1006-2L

Unit:mm

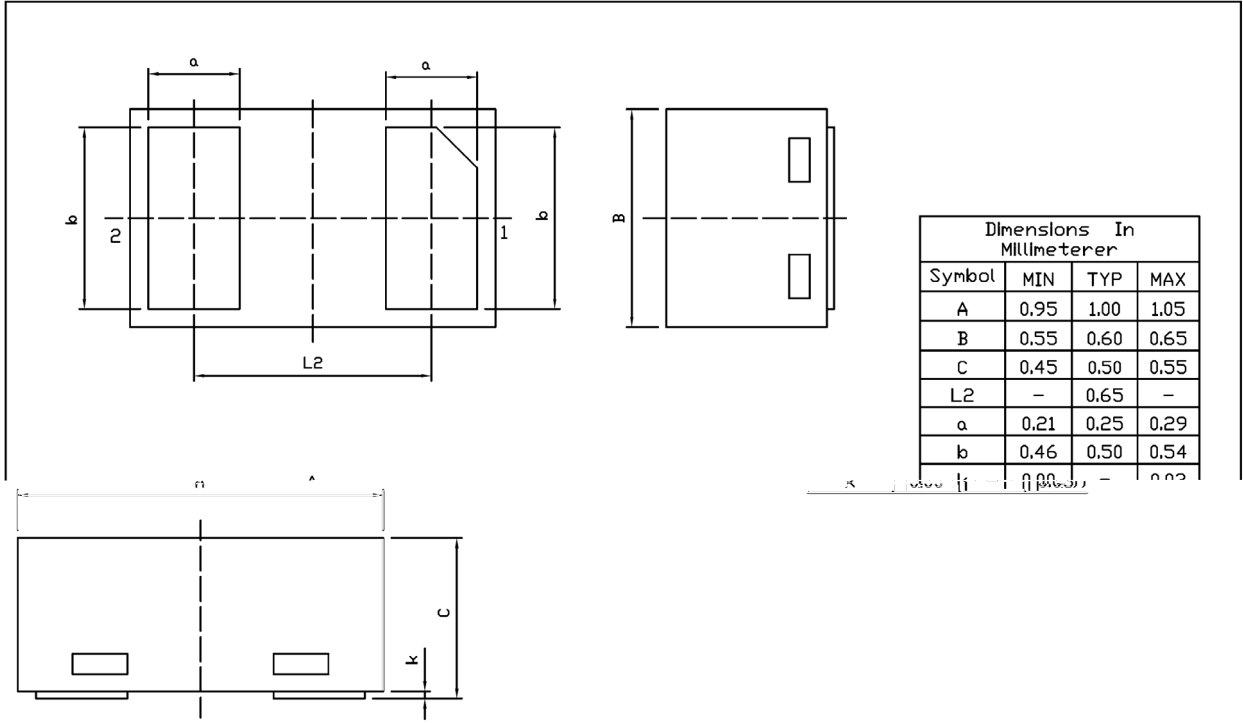


Rev.01 202108

/ Marking Instructions

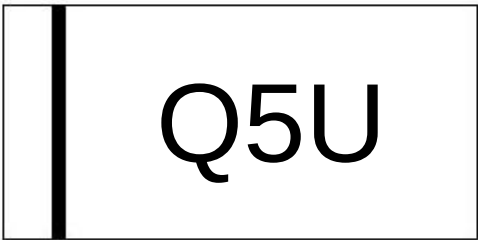

Q
5U

Note	
Q	Automobile halogen-free product Code
5U	Product Type

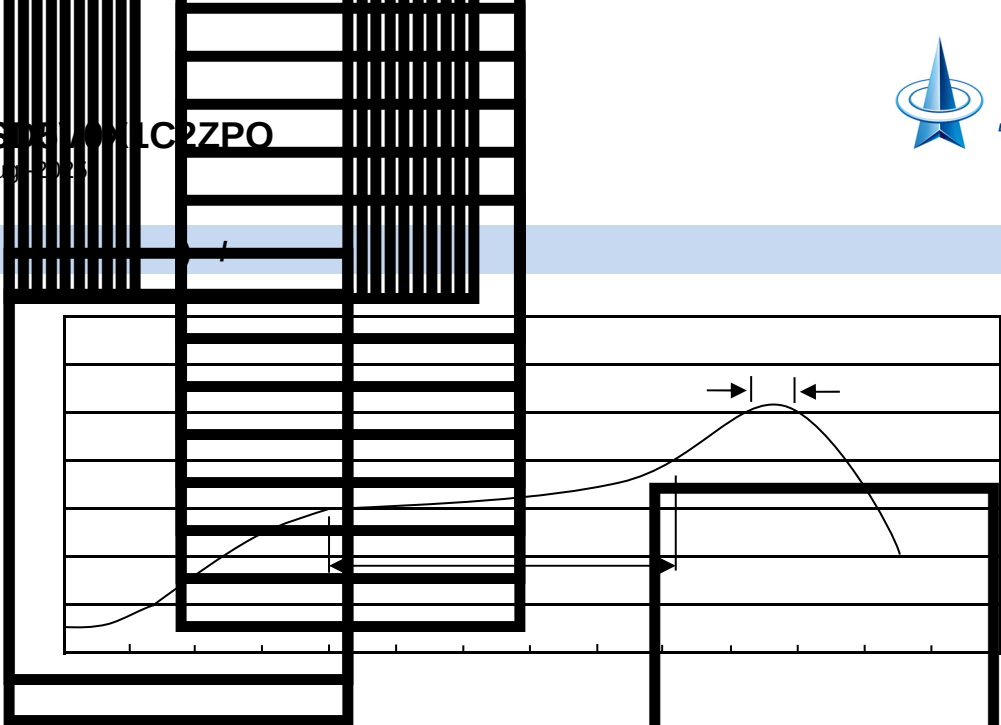

Notes:

- | | | | | | |
|---|-------|-----|-----------|---|--|
| 1 | 150 | 200 | 60 | 120sec; | 1.Preheating:150~200 , Time:60~120sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec | |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
DFN1006-2L	10,000	10	100,000	6	600,000	7" ×8	180×120×180	390×385×205

/ Notices