

/ Descriptions


/ Features

1. 1. 1.


/ Applications

, UPS

/ Equivalent Circuit



/ Pinning

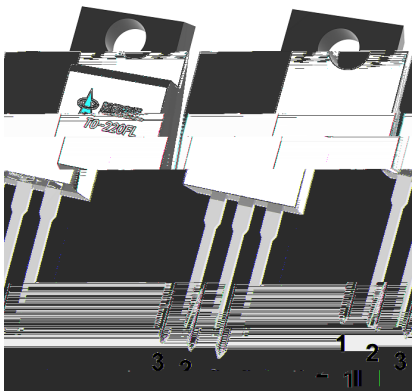

/ Marking







	θ		℃
	θ		℃
			℃

		μ				
						μ
		μ				


Ω

		Ω				


/ Electrical Characteristic Curve

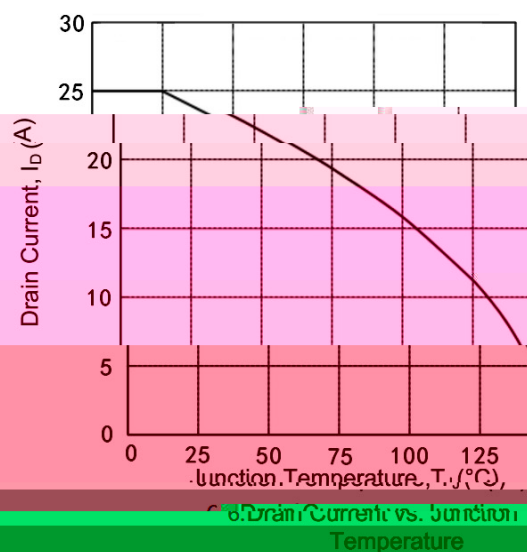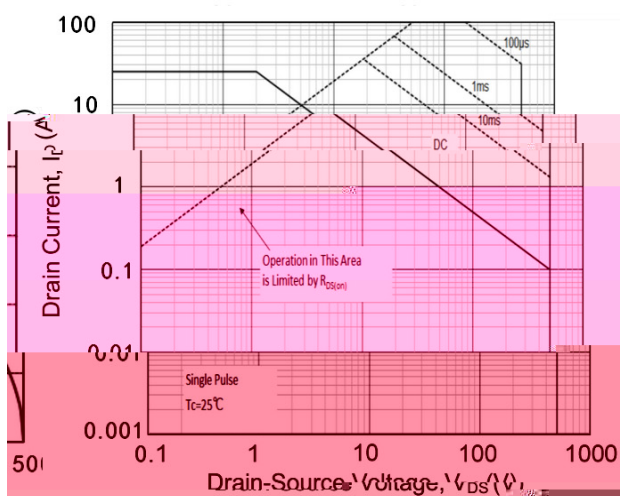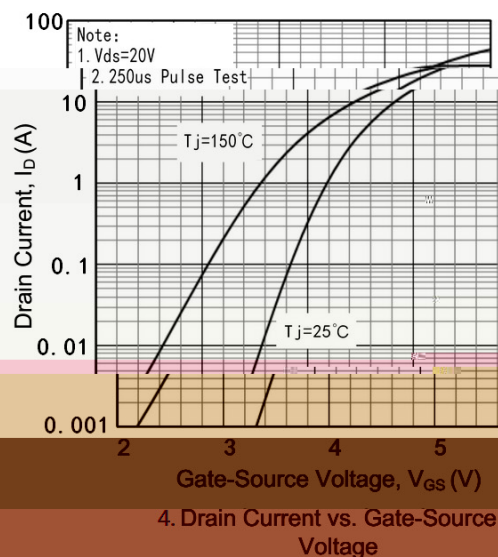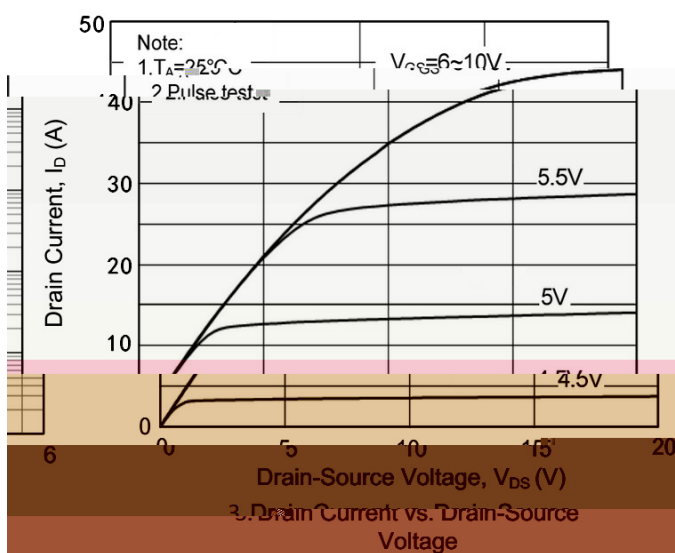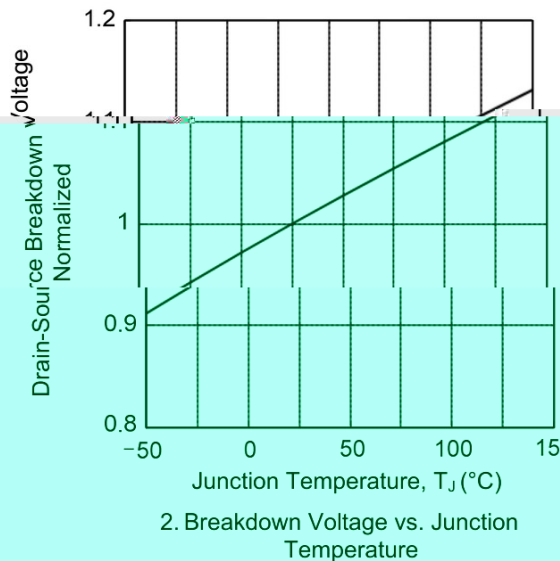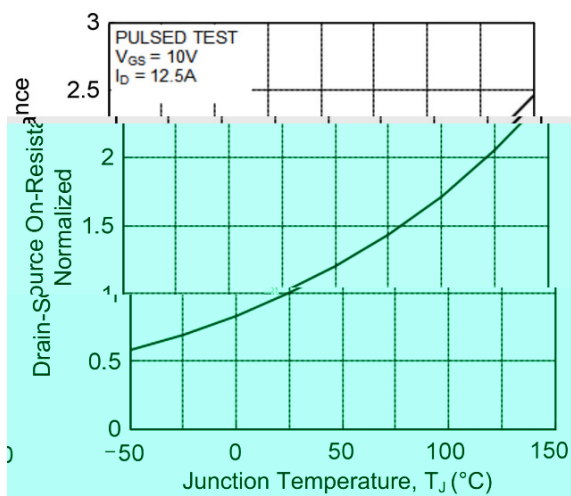

/ Package Dimensions

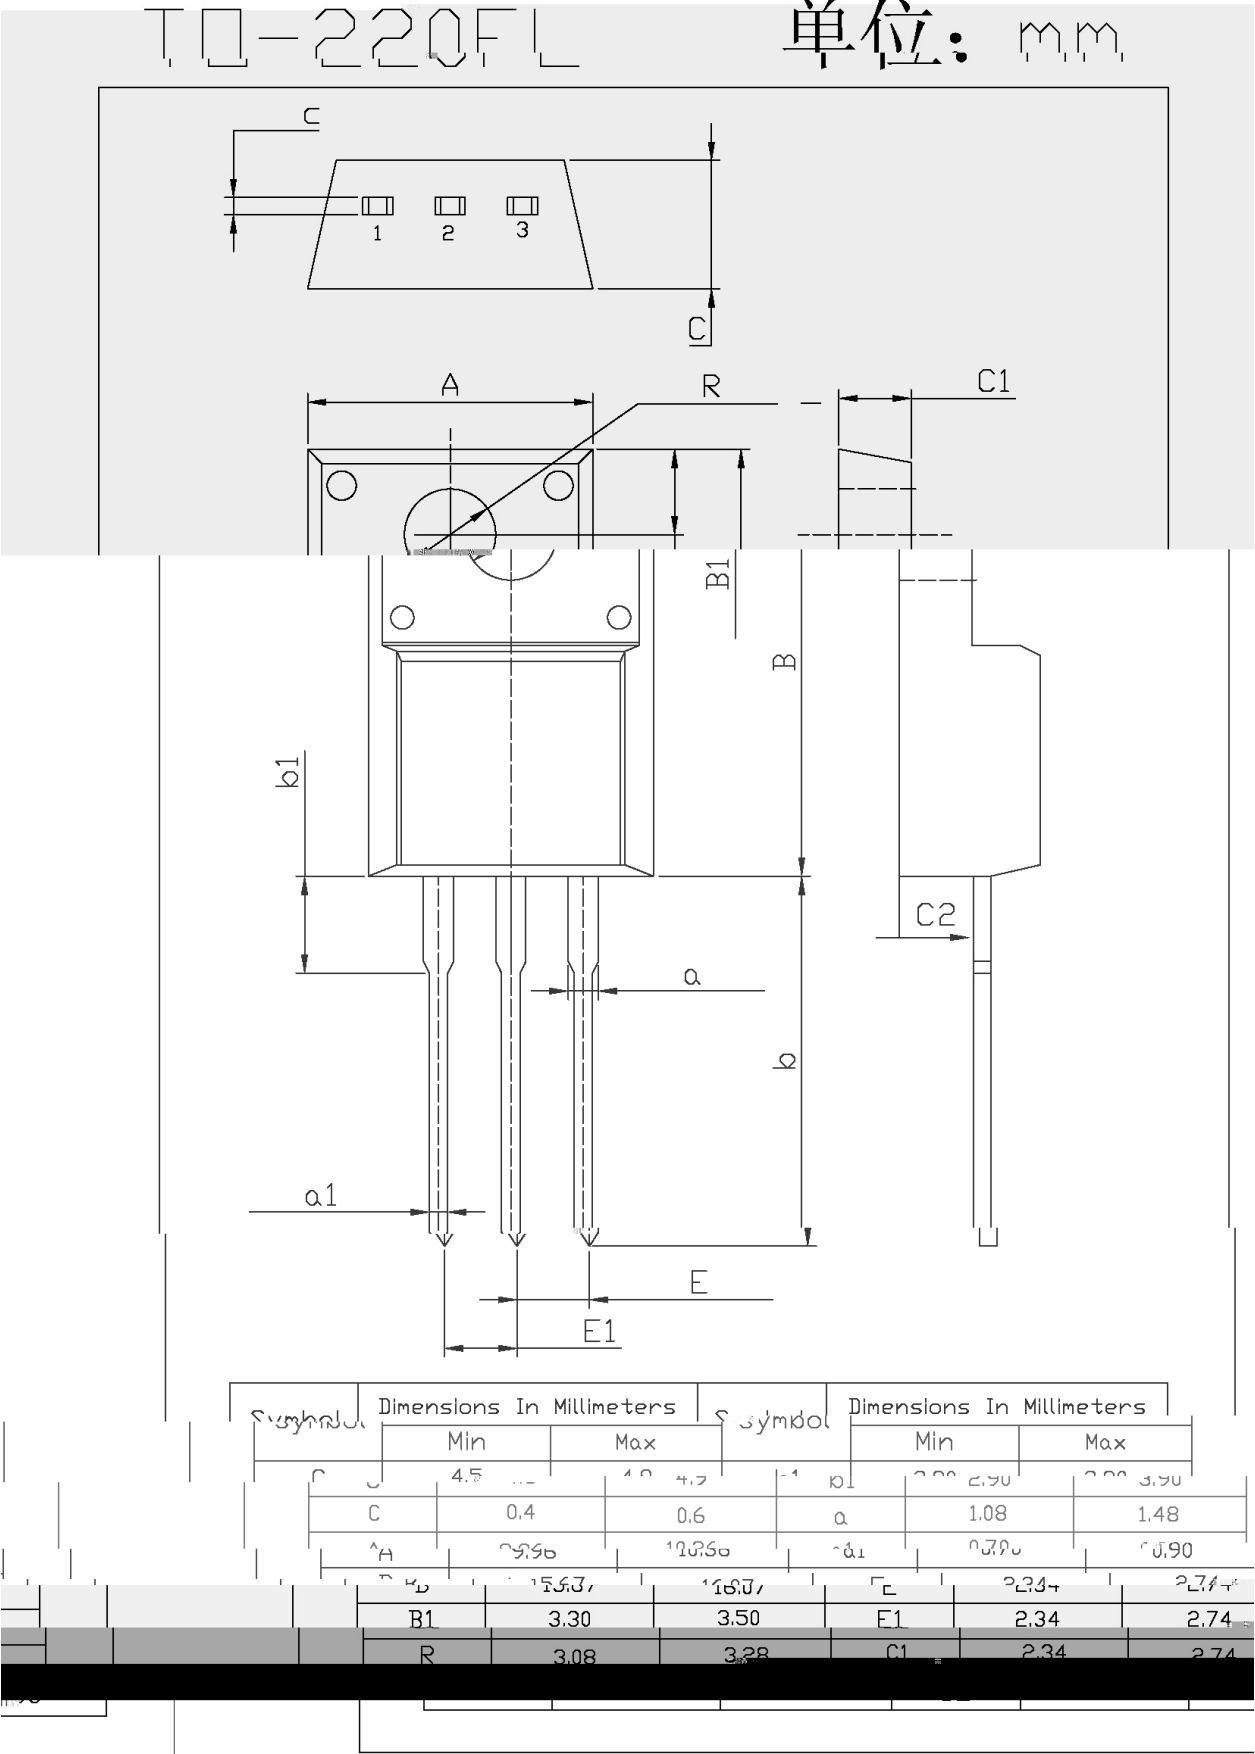


/ Marking Instructions

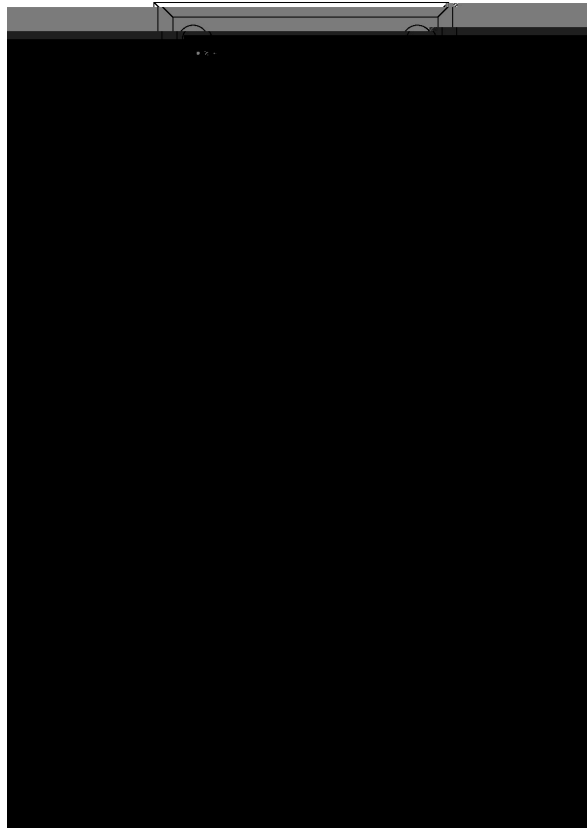

BR
25N50

() / Temperature Profile for Dip Soldering(Pb-Free)

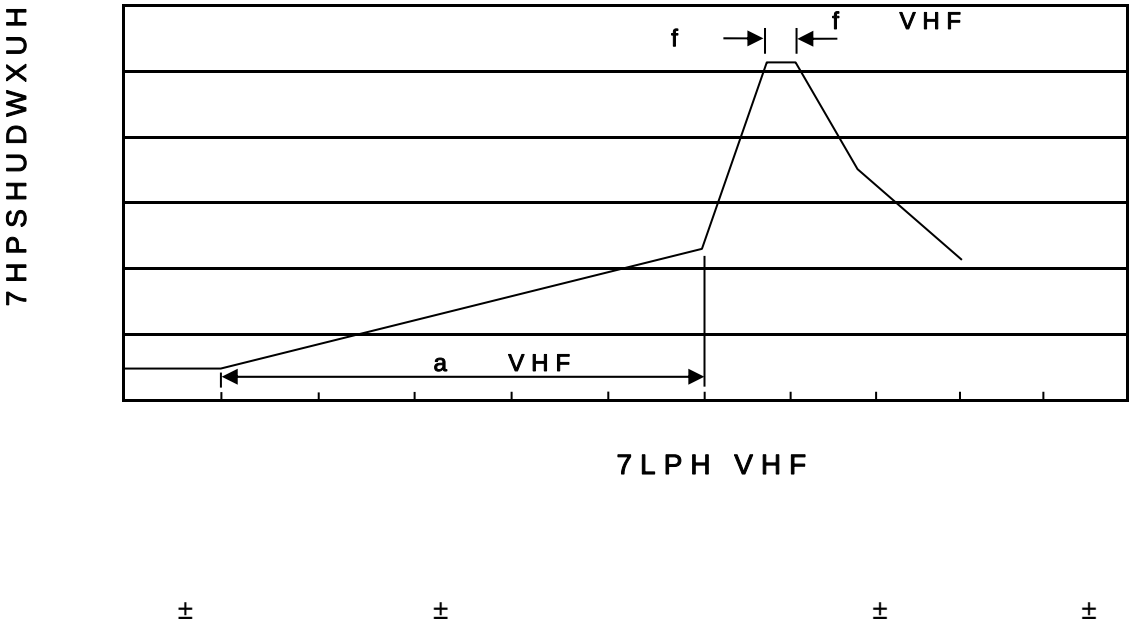

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

7>û~E	;>û,H					;>û p . Æ		
	0 /•1×	00 •1×/-	000 /-	0000 - /1ç	0000 /1ç	000 •1×	0000 -	0000 1ç

/ Notices