

BRFL65R380C

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

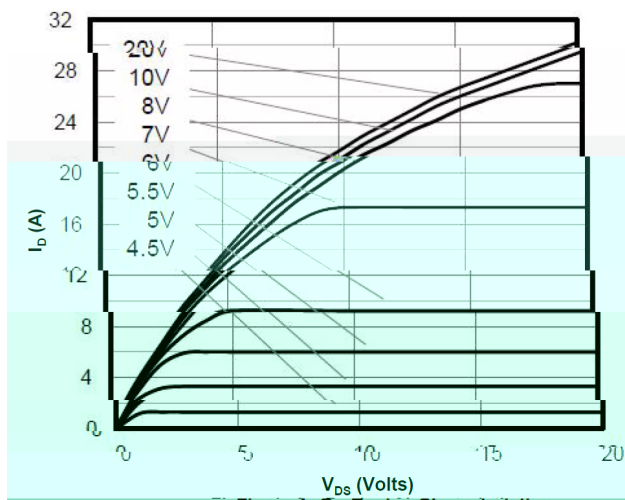


Figure 1: On-Region Characteristics

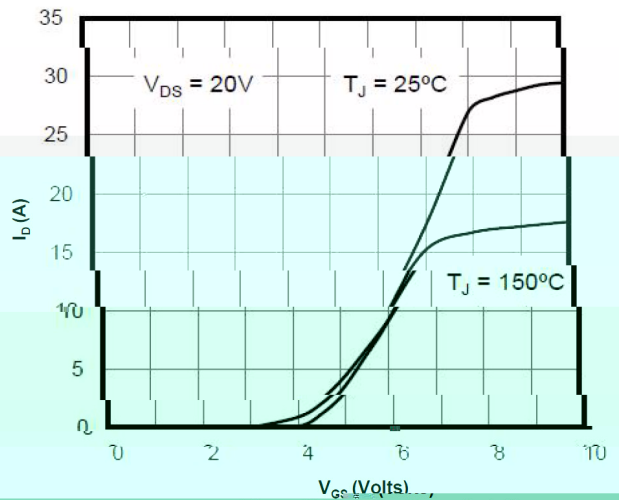


Figure 2: Transfer Characteristics

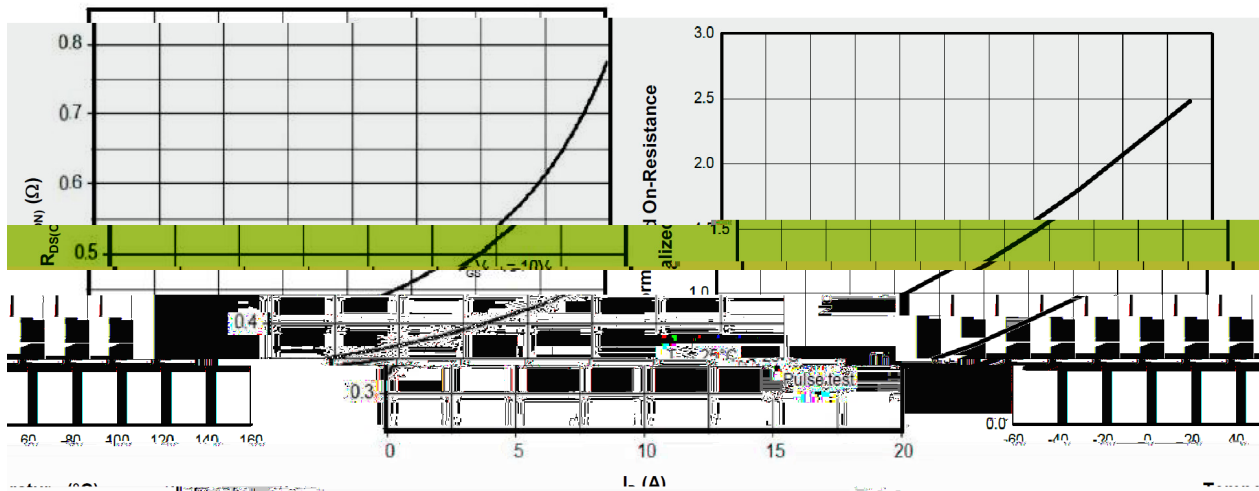


Figure 3: On-Resistance vs. Drain Current and Gate Voltage






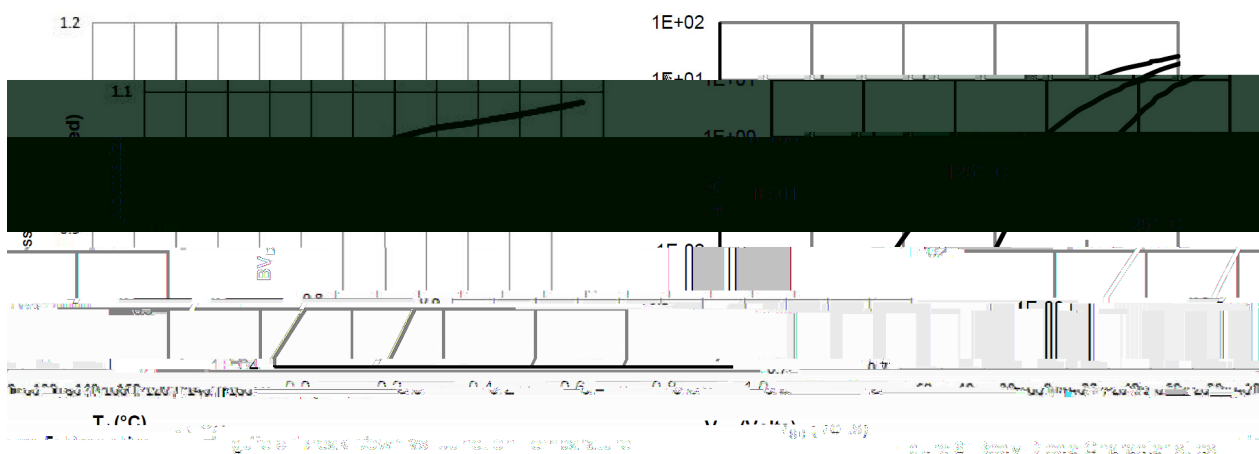


Figure 4: On-Resistance vs. Junction Temperature


/ Electrical Characteristic Curve

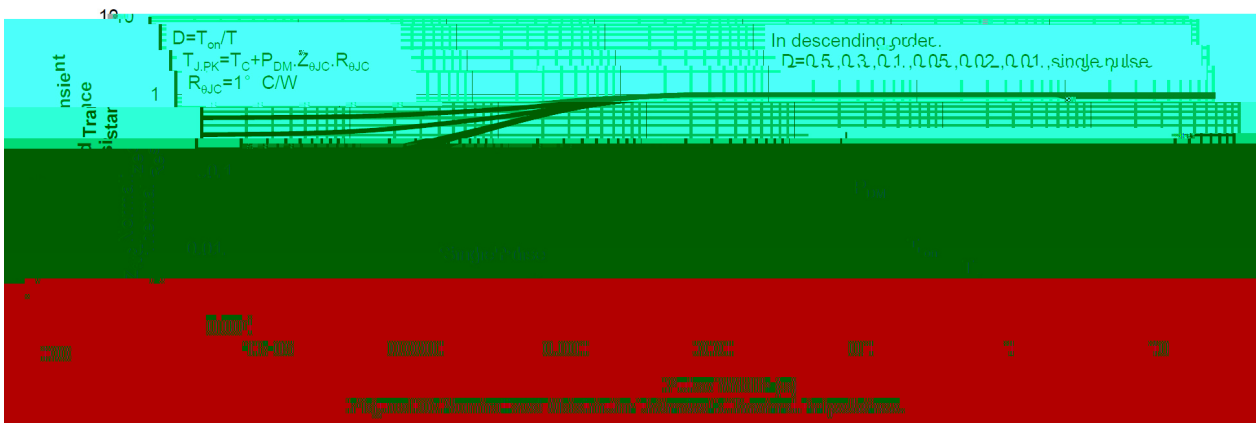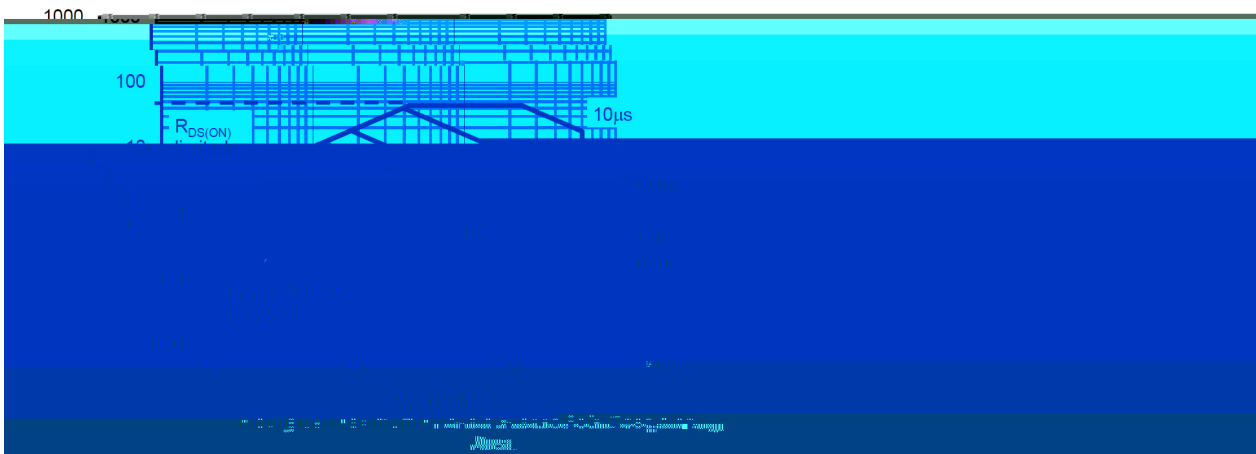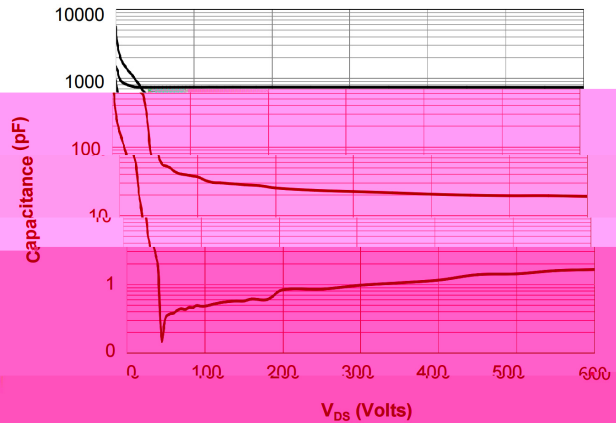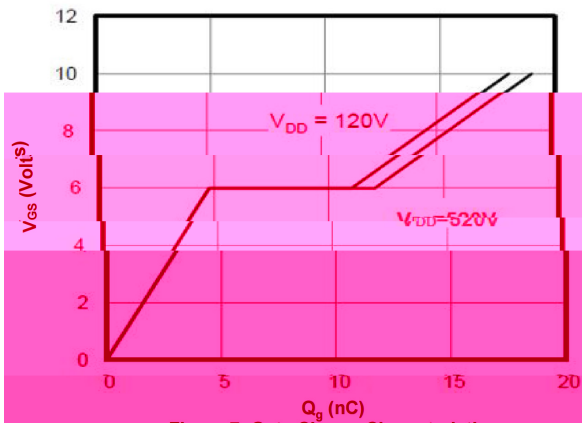

/ Package Dimensions

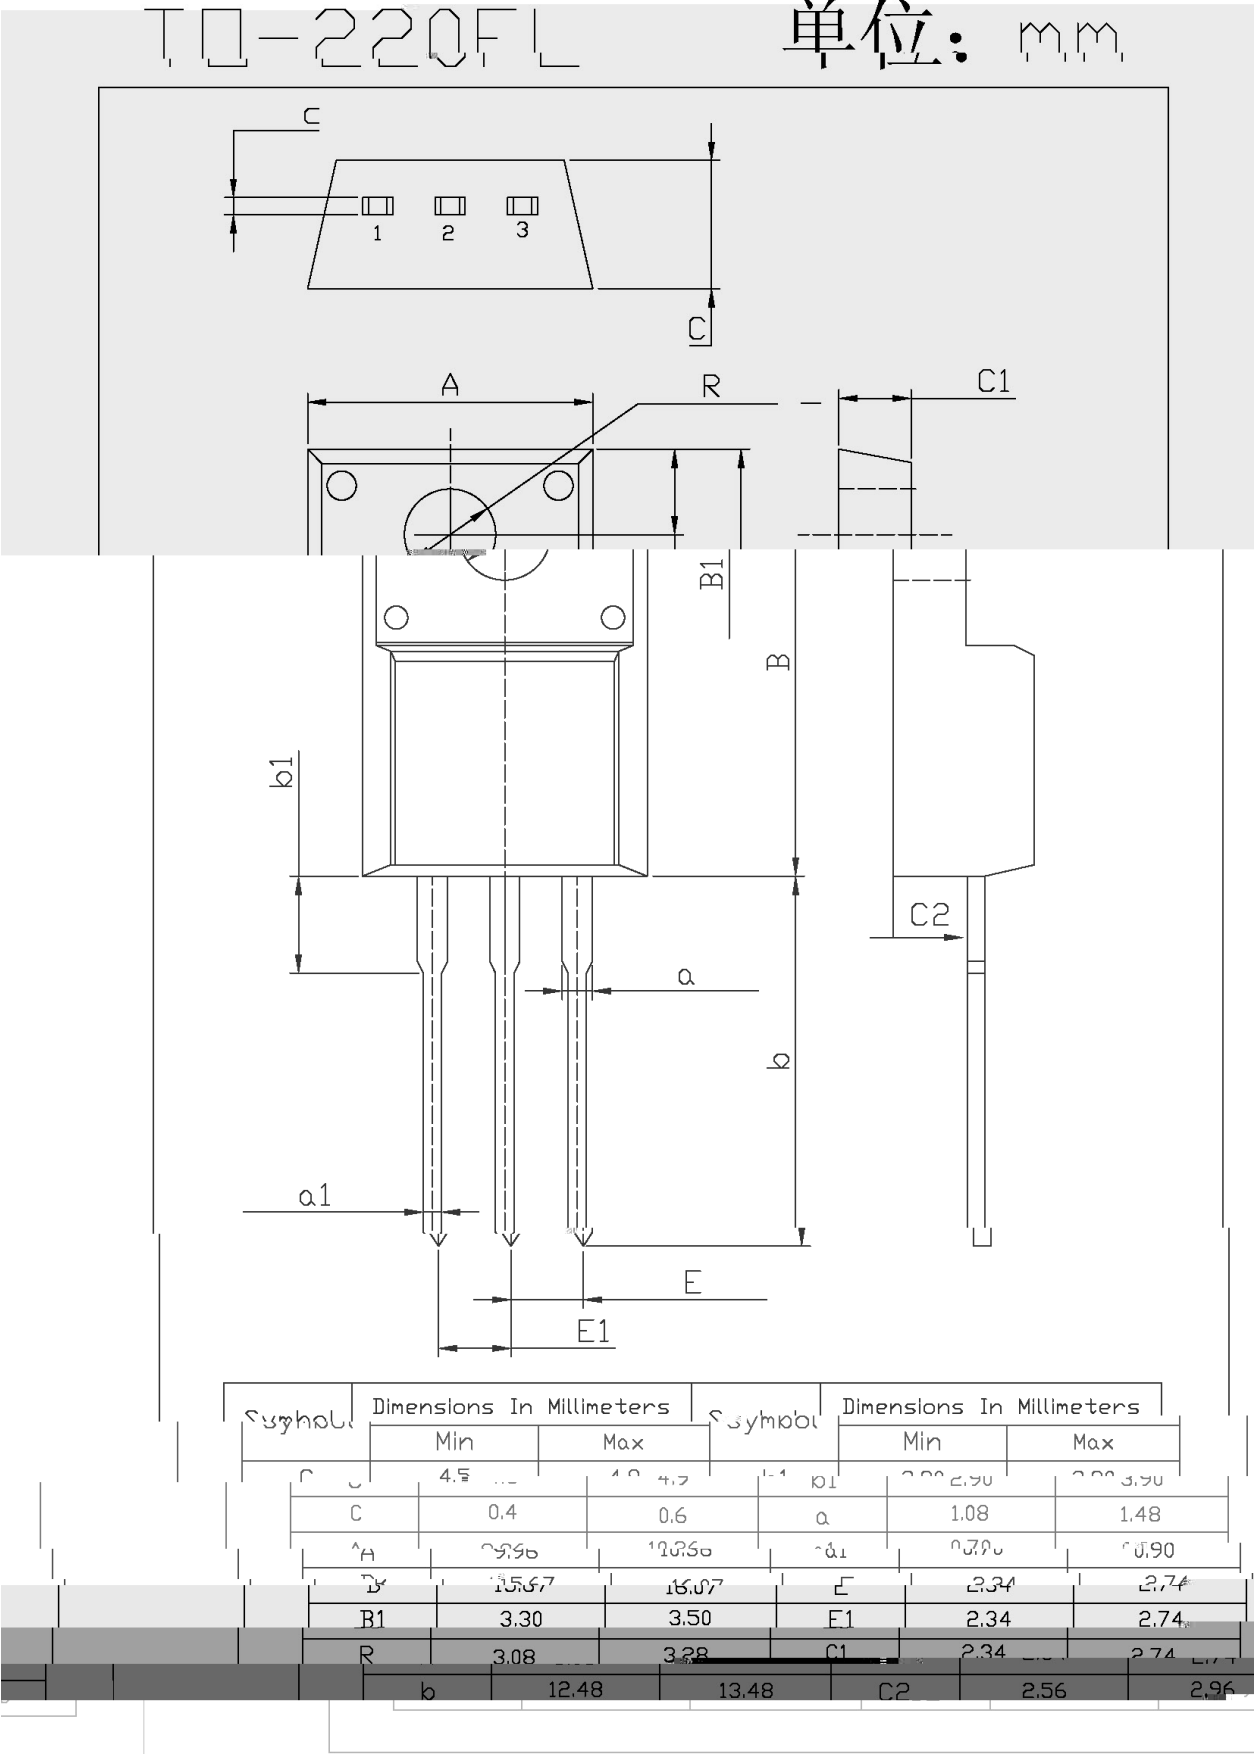

/ Marking Instructions

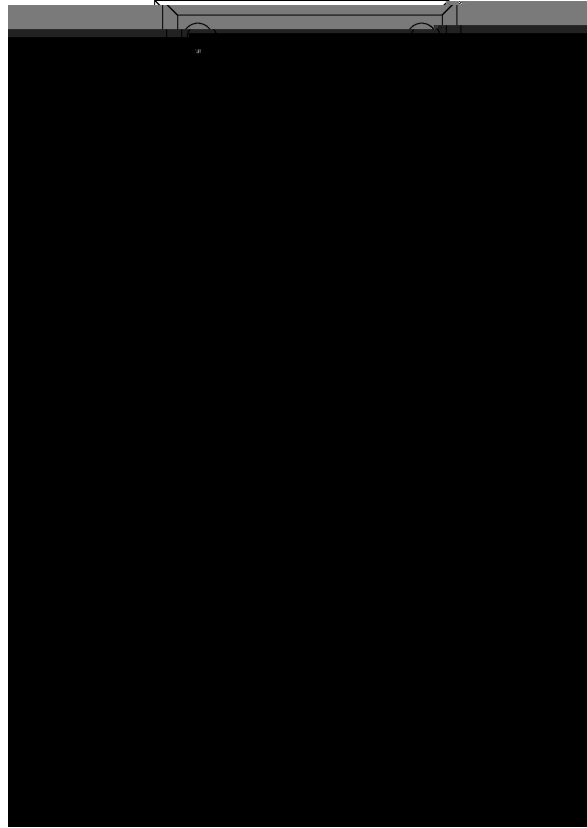

65R380C

Conc. of $K_2S_2O_8$ (mole/l)	Polymerization rate (g/hr)
0.0	0
0.1	10
0.2	20
0.3	30
0.4	40
0.5	50
0.6	750
0.7	600
0.8	450
0.9	380
1.0	350

 $\pm$ $\pm$

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

8 8