


/ Descriptions

650V


/ Features

/ Applications

/ Equivalent Circuit







/ Pinning

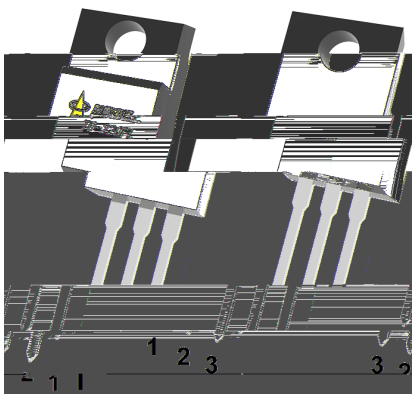

/ Marking

BRFL65R380T

/ Electrical Characteristic Curve

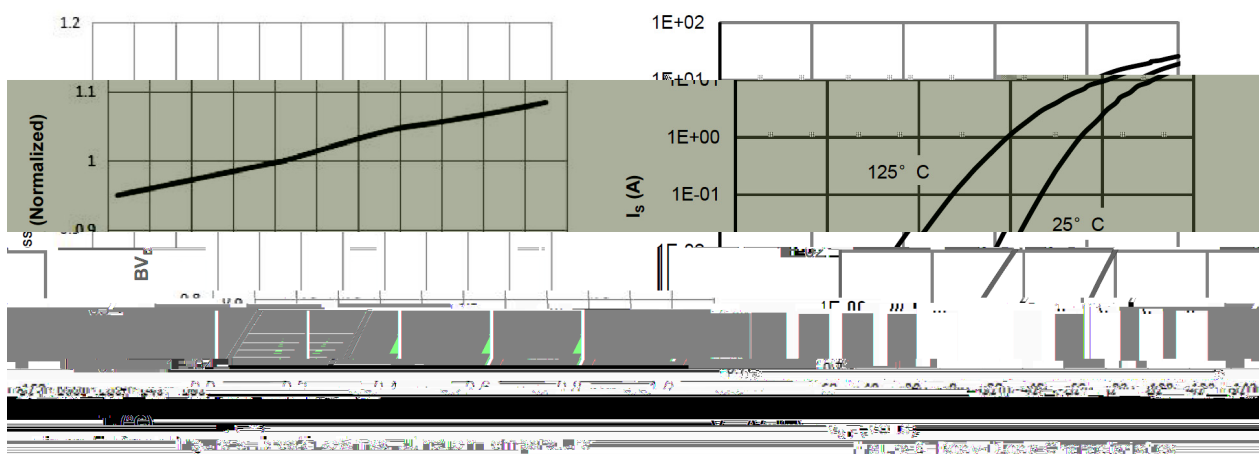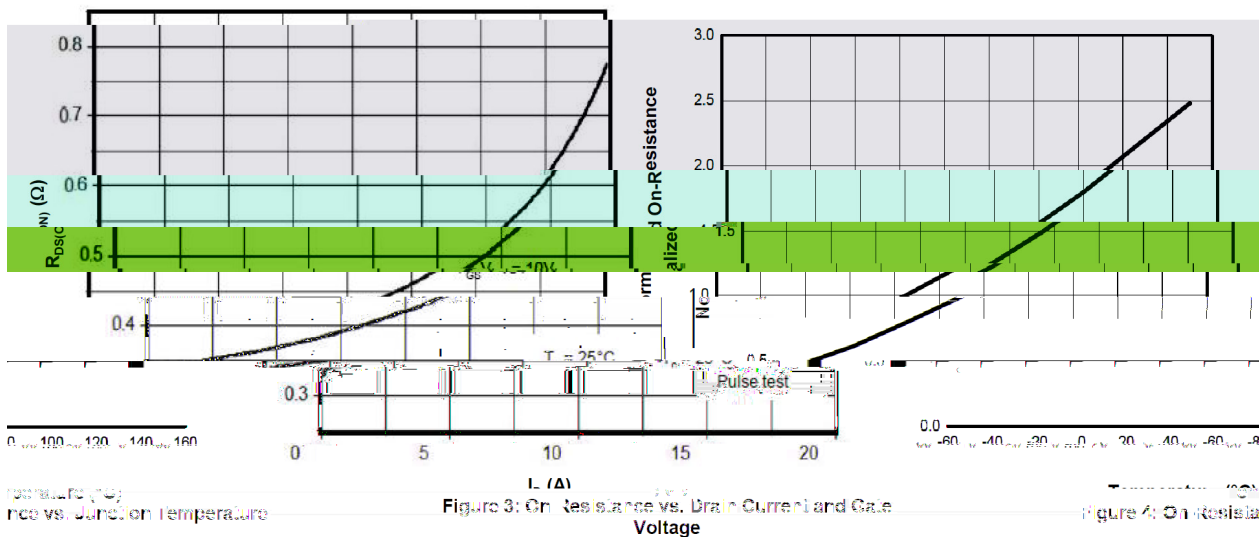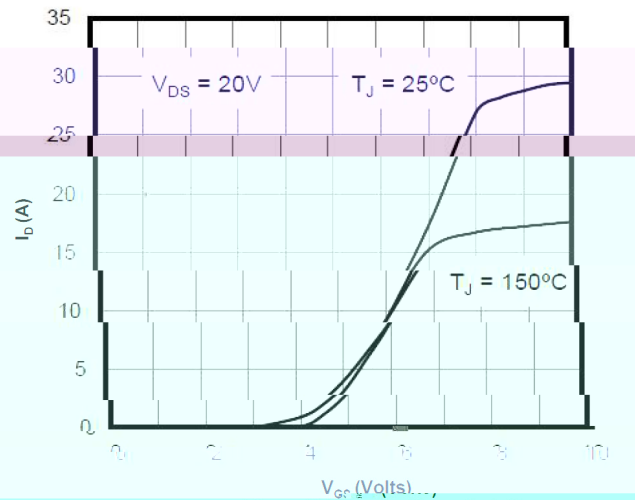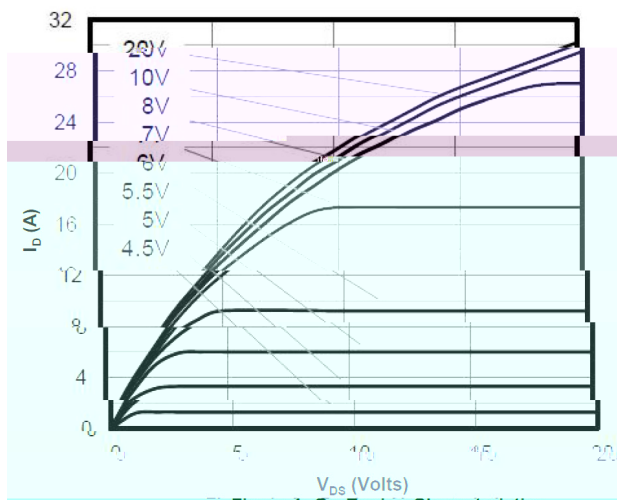

/ Electrical Characteristic Curve

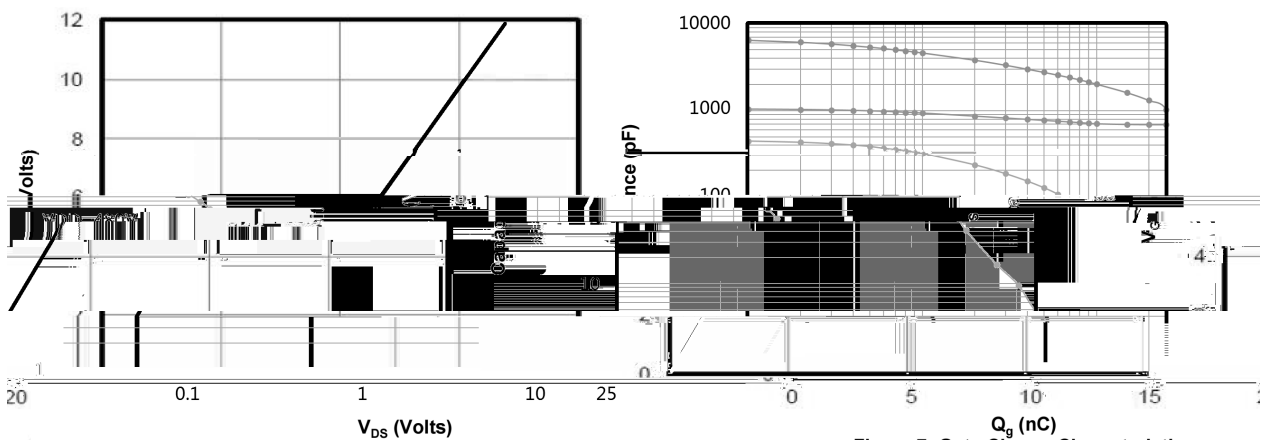


Figure 8: Capacitance Characteristics

Figure 7: Gate-Charge Characteristics

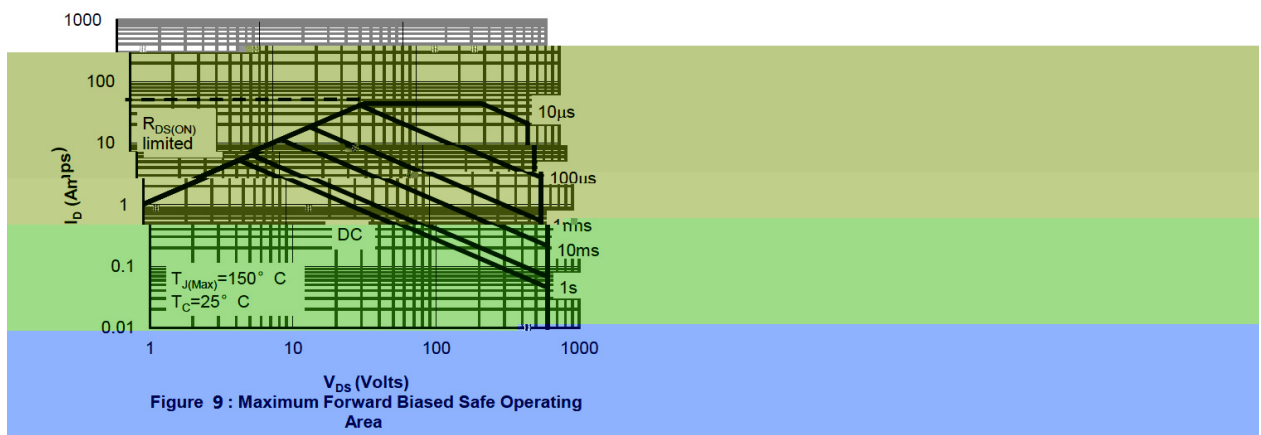


Figure 9 : Maximum Forward Biased Safe Operating Area



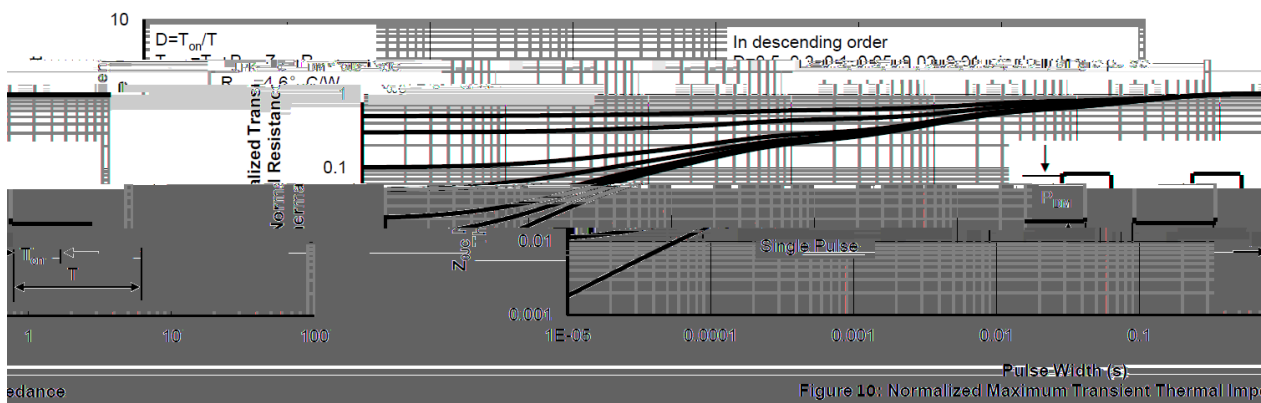



Figure 10: Normalized Maximum Transient Thermal Imp

/ Package Dimensions

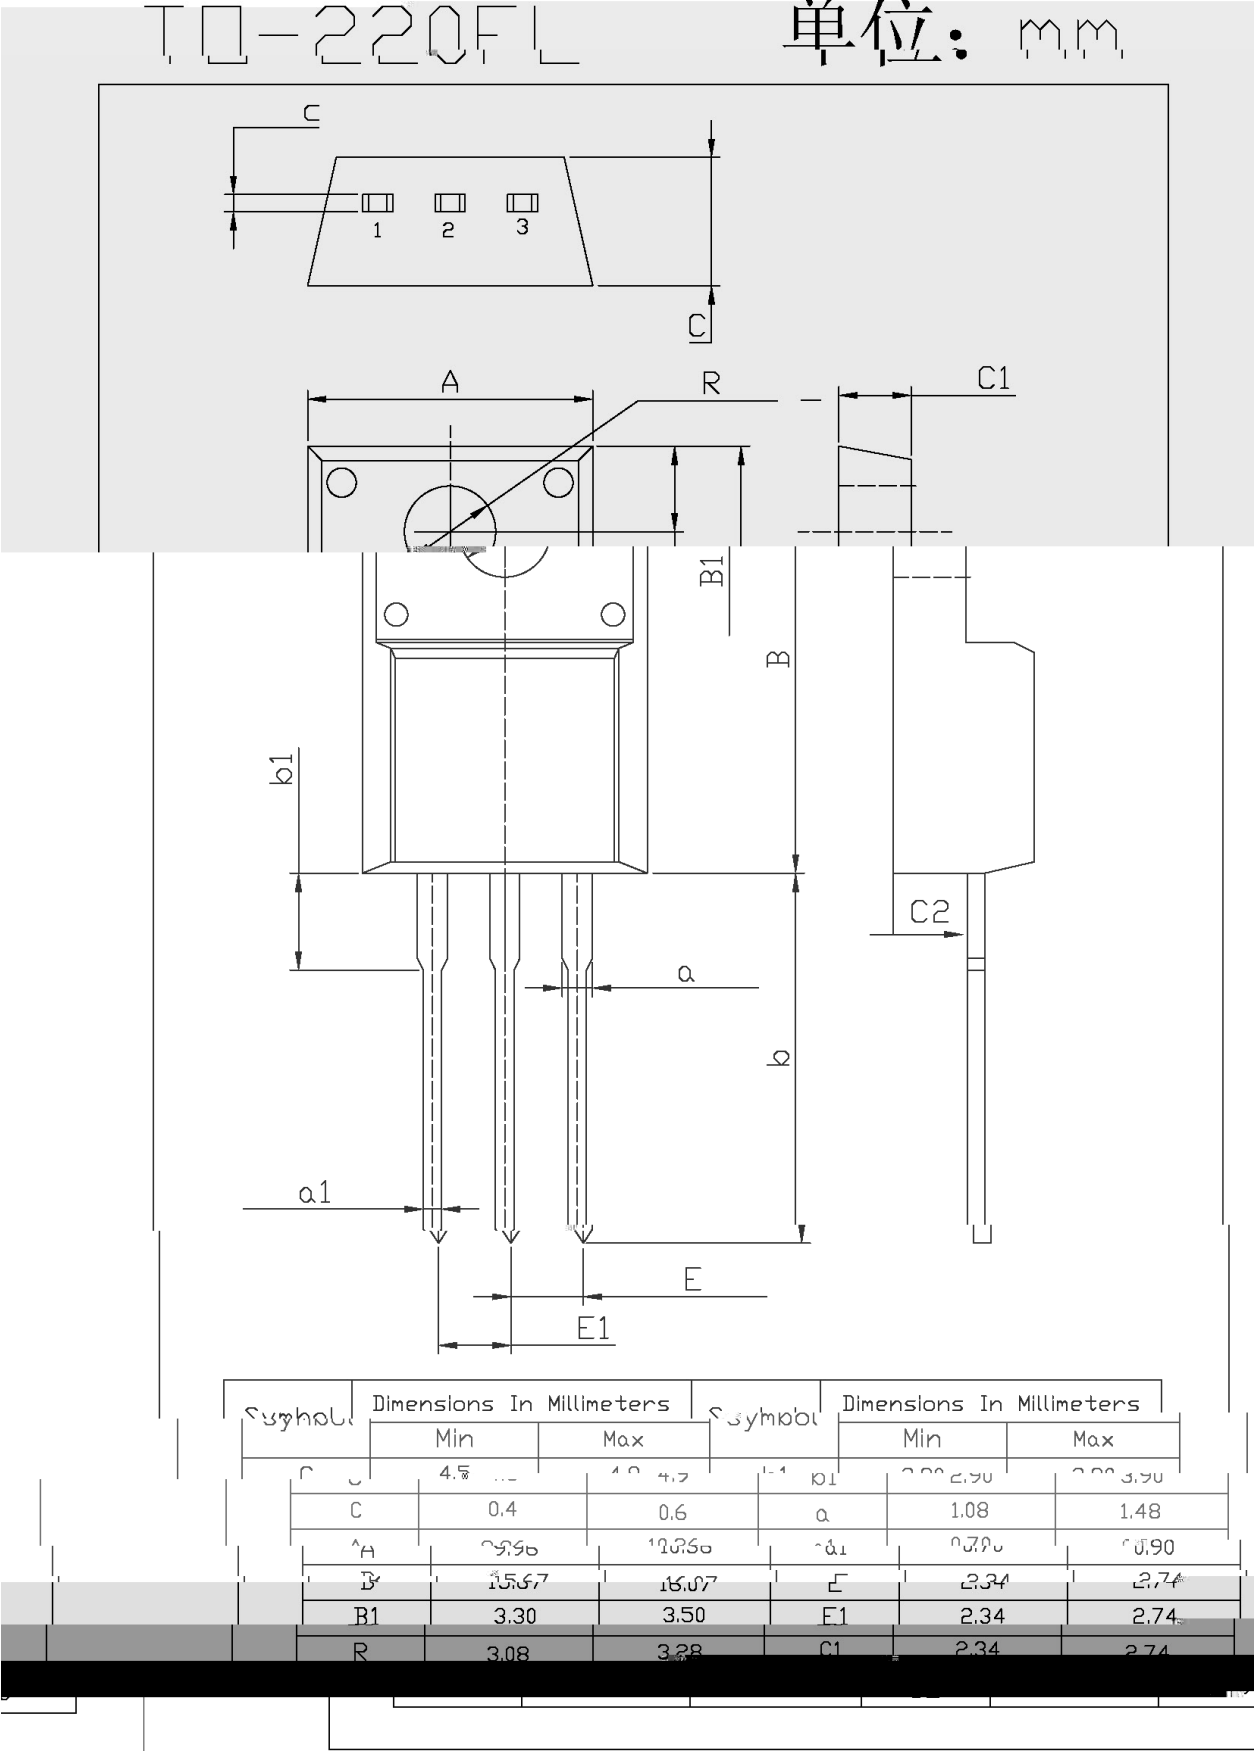

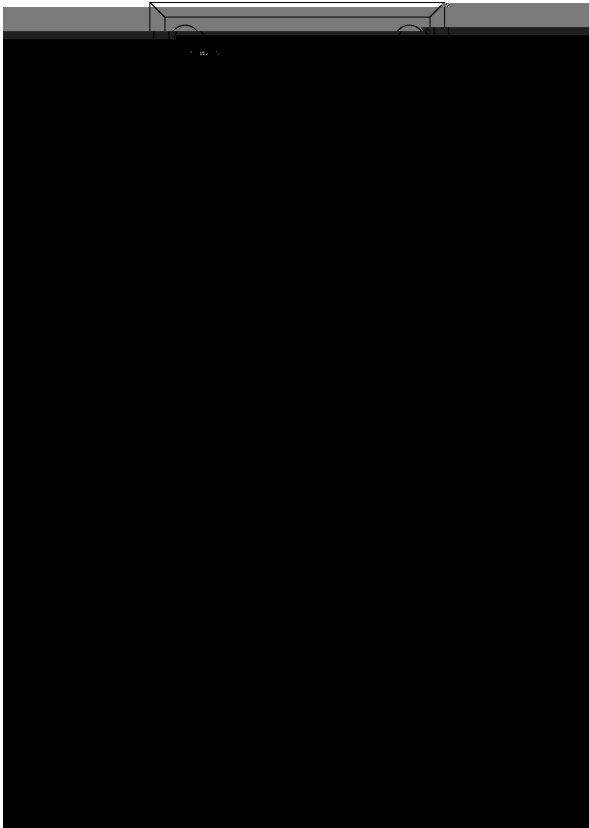

() / Temperature Profile for Dip Soldering(Pb-Free)

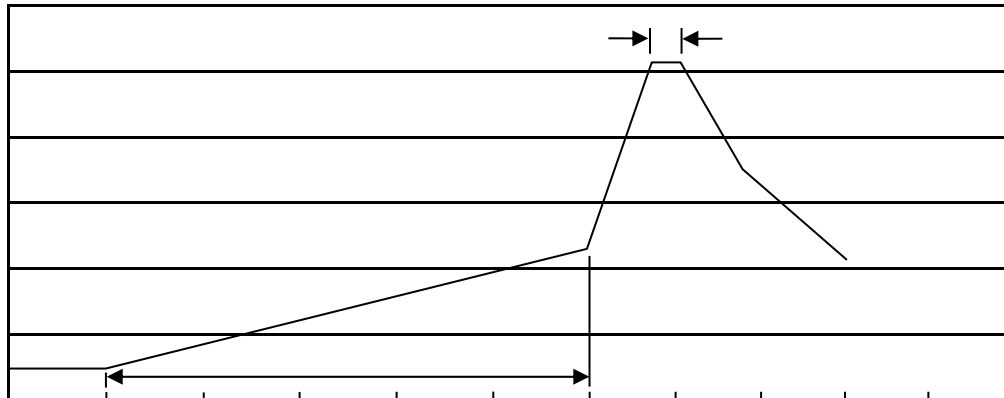 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices