


/ Descriptions

700V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

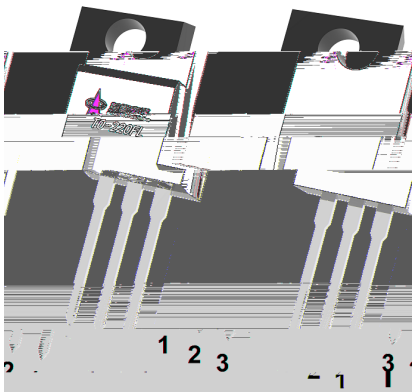

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

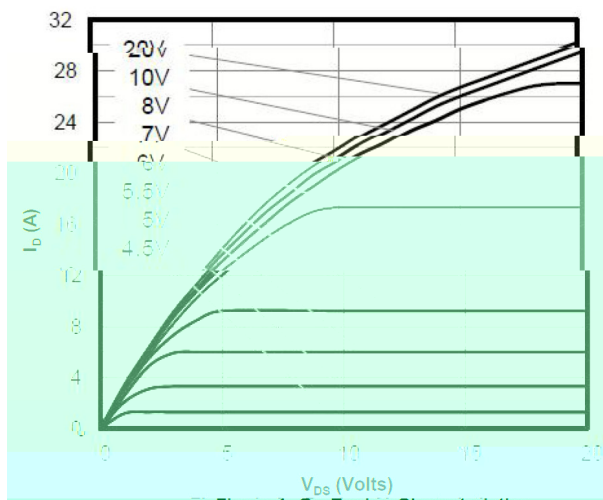


Figure 1: On-Region Characteristics

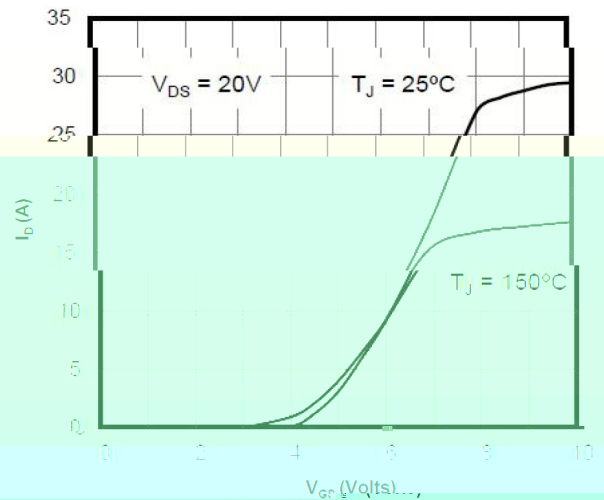


Figure 2: Transfer Characteristics








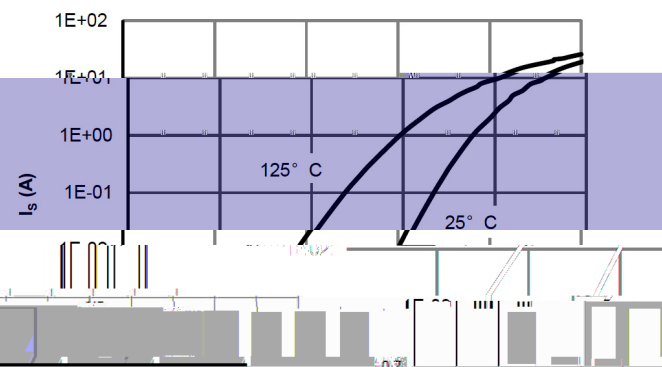


Figure 3: Normalized Threshold Voltage vs. Temperature
 Figure 4: Drain Current vs. Temperature


/ Electrical Characteristic Curve

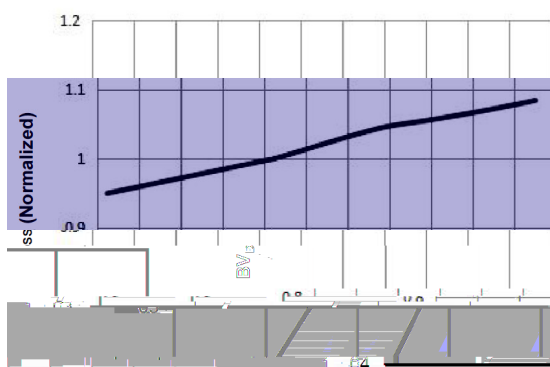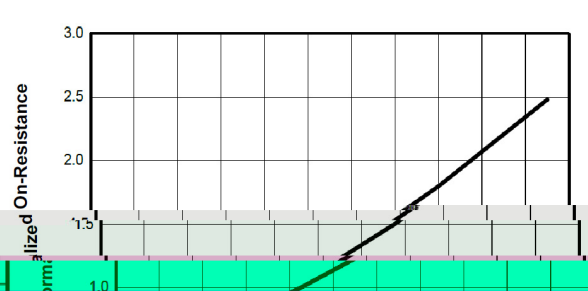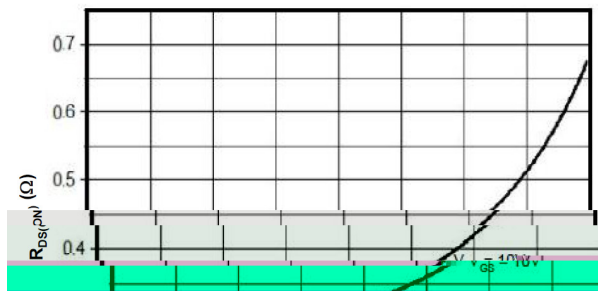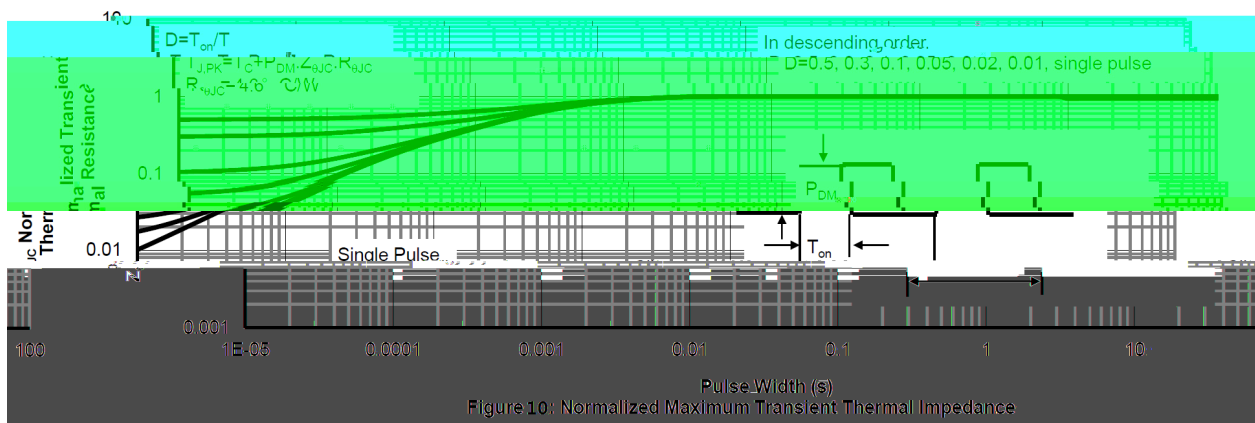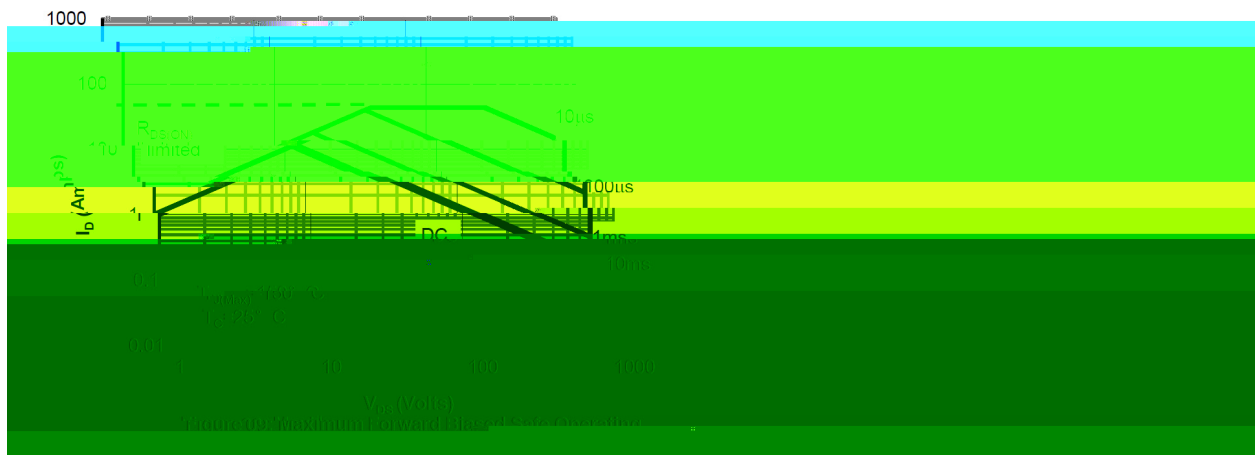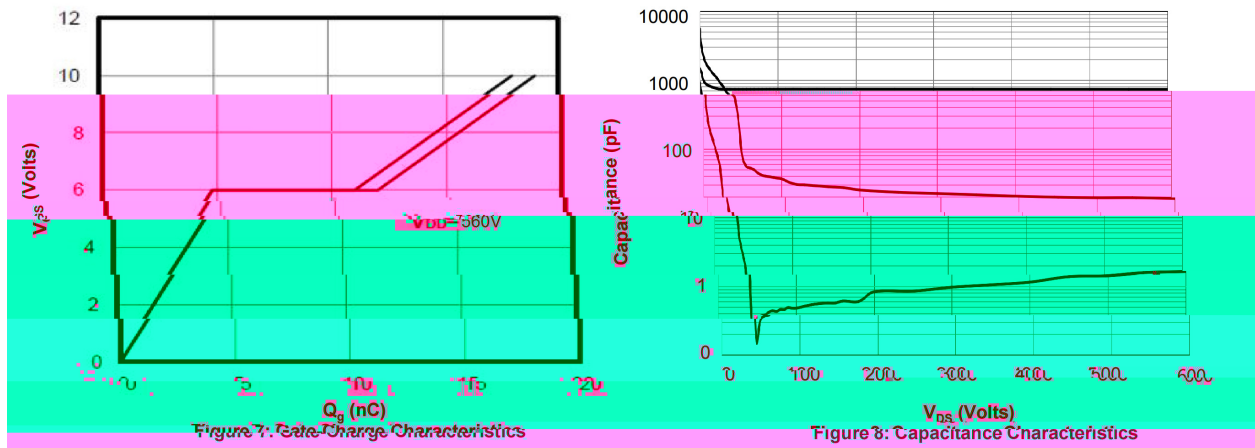


/ Package Dimensions

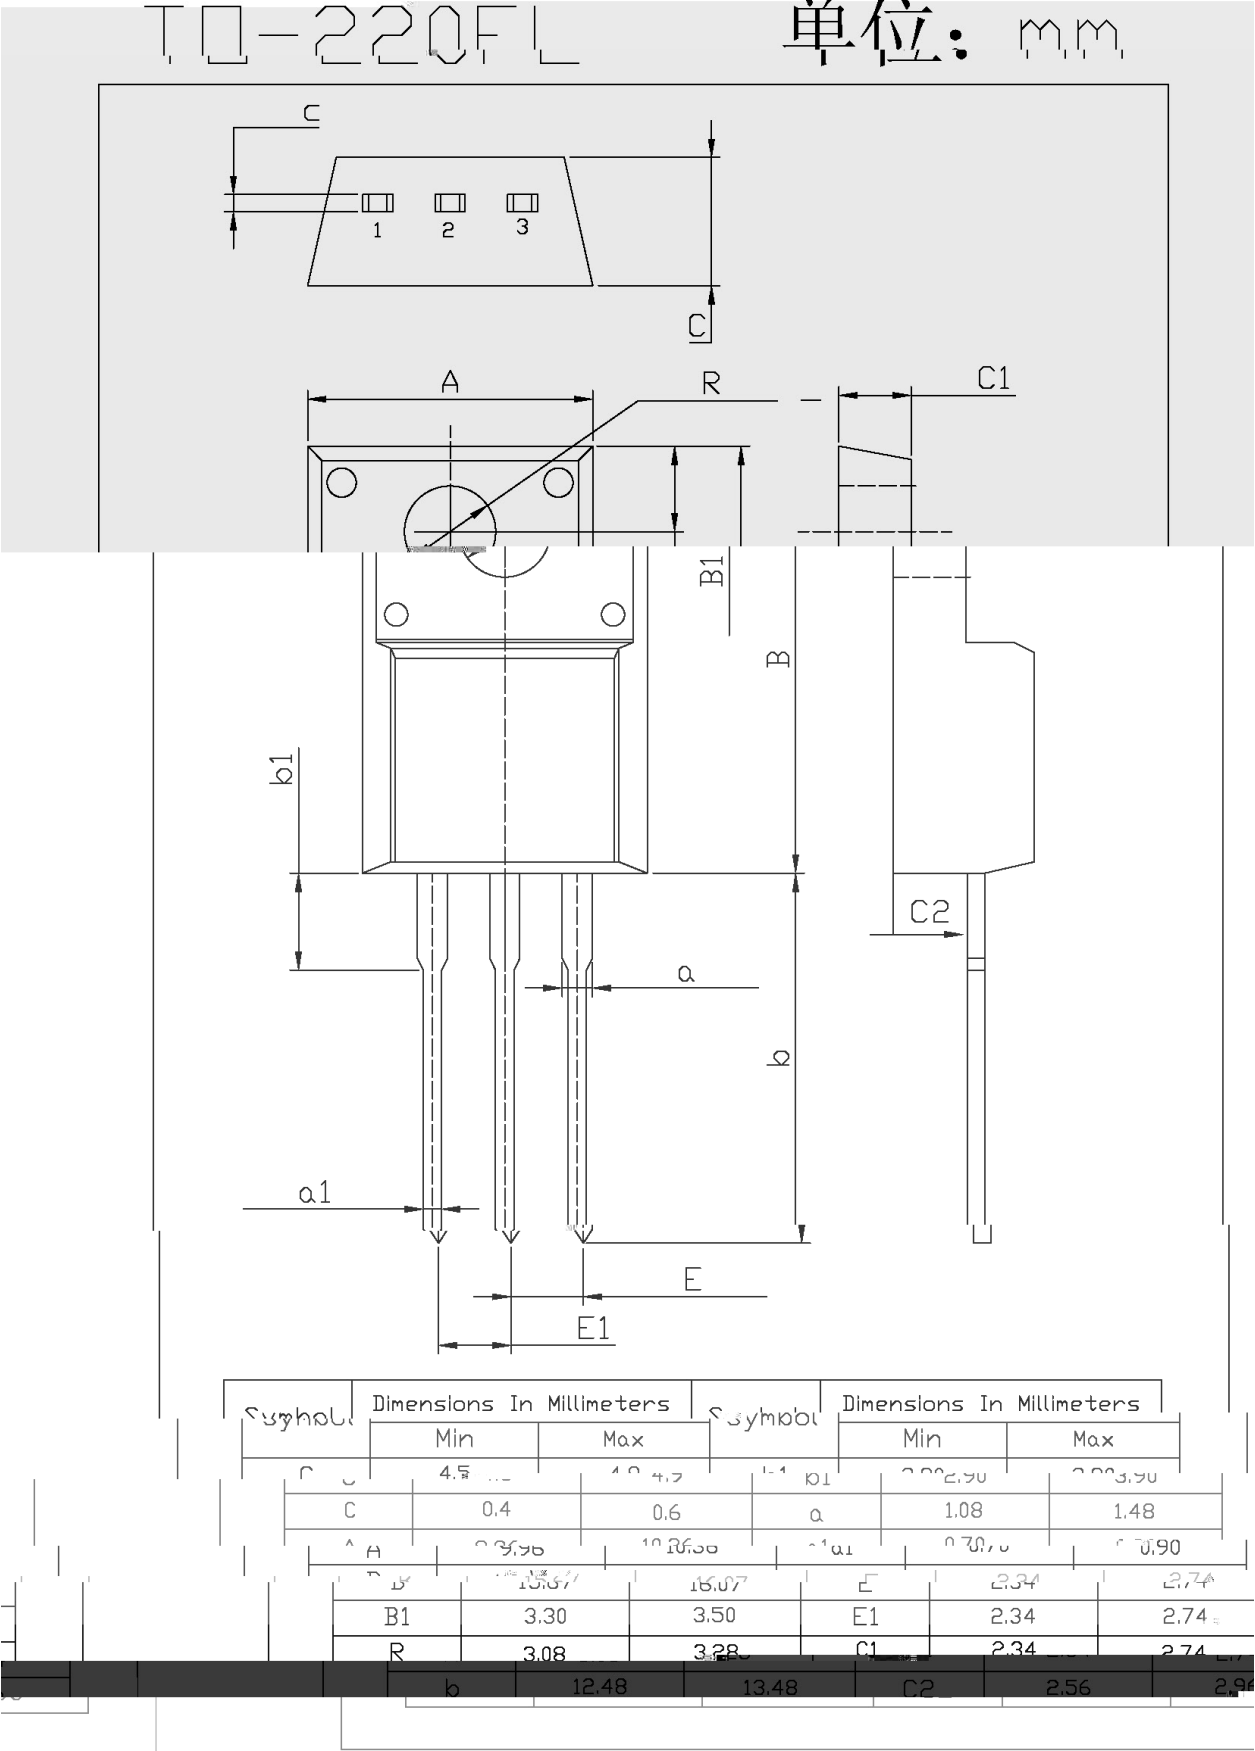

/ Marking Instructions

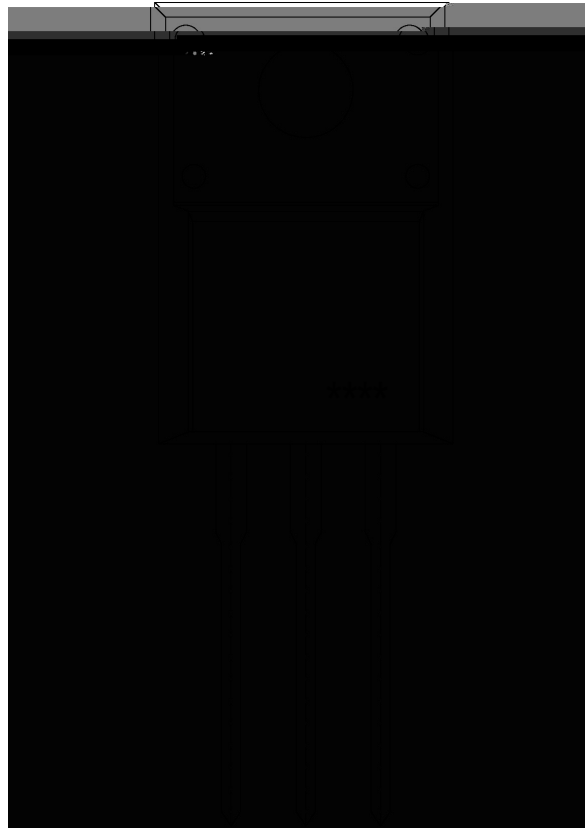

70R360C

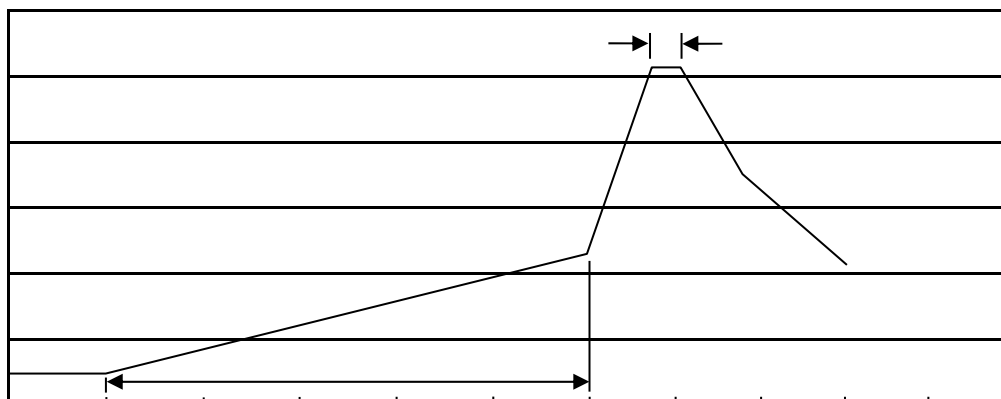 $\pm$

/ Resistance to Soldering Heat Test Conditions

°C

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices