


/ Descriptions

GBU


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

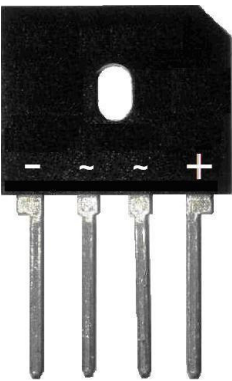

/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

		×	
	θ		℃
			℃
		~	℃

/ Electrical Characteristics(Ta=25)


		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
	()	℃				μ
		℃				

/ :


/

/

/ Electrical Characteristic Curve

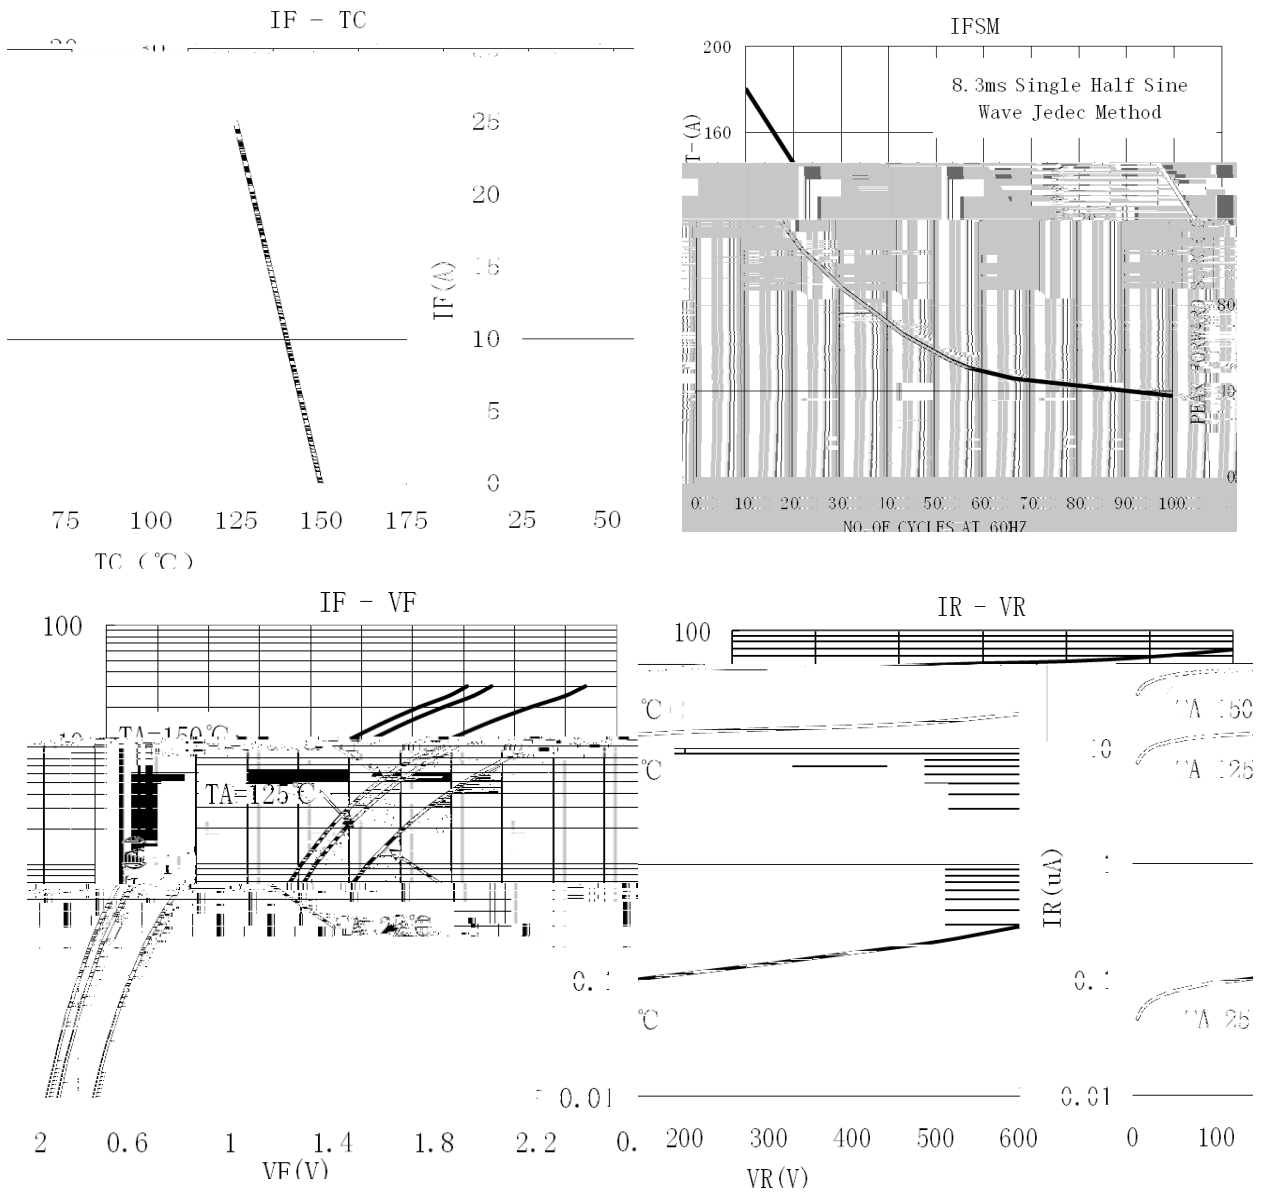


/ Package Dimensions

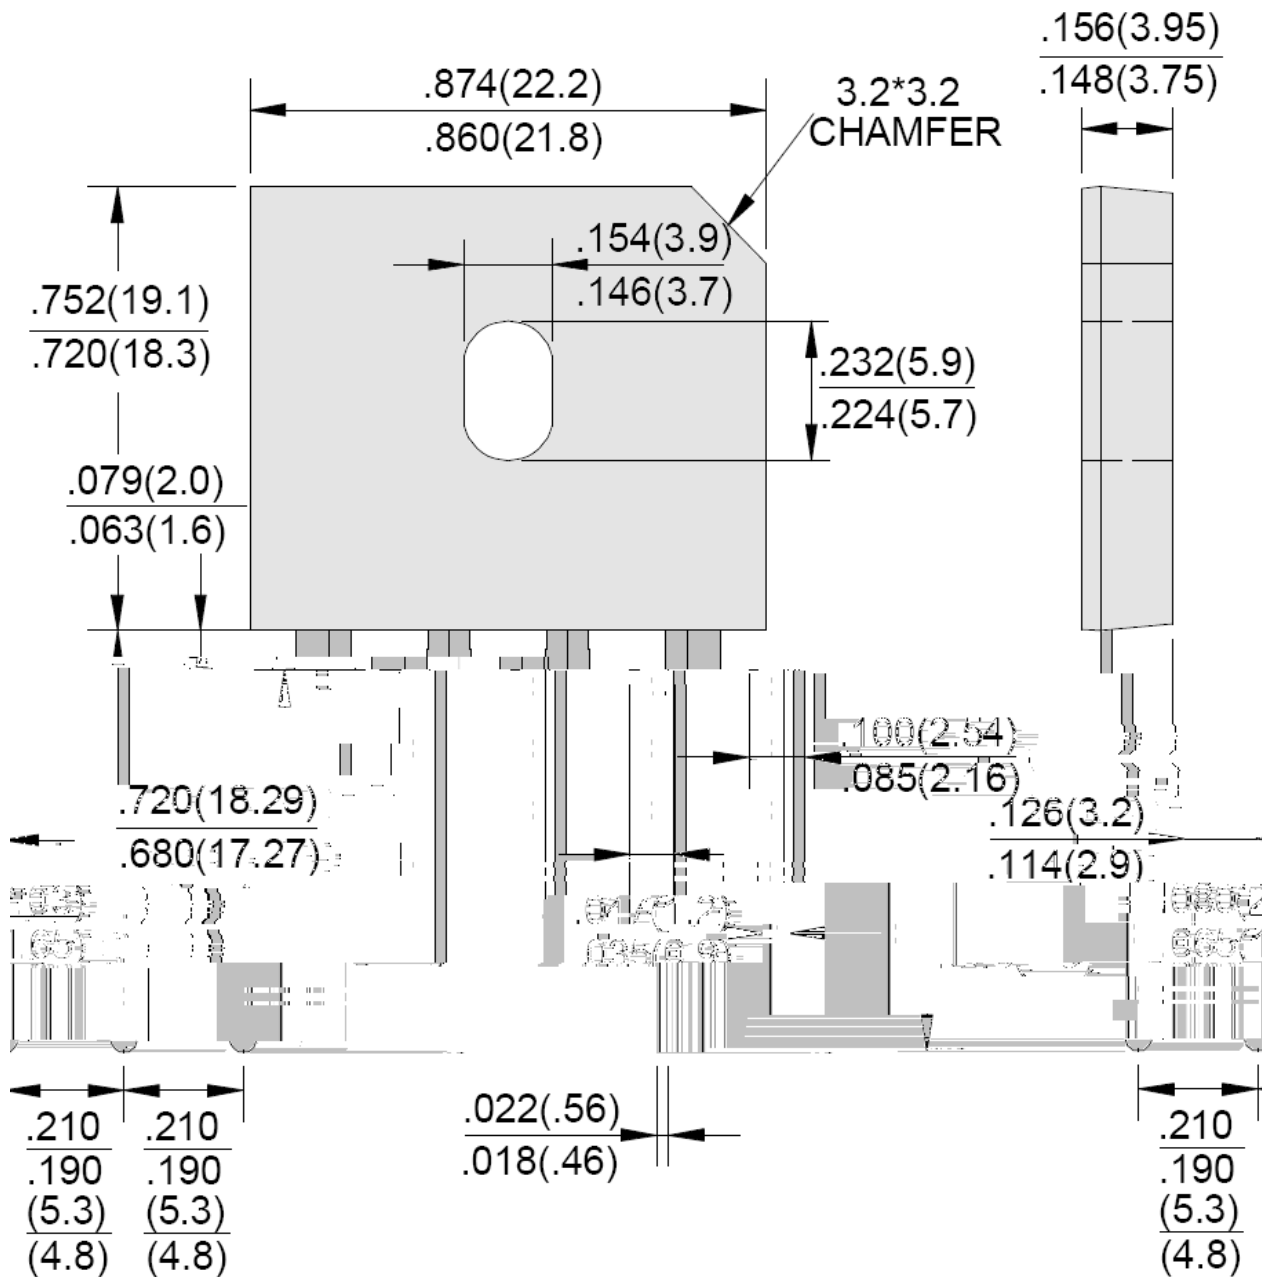GBU

Dimensions in inches and (millimeters)

Dimension


/ Marking Instructions

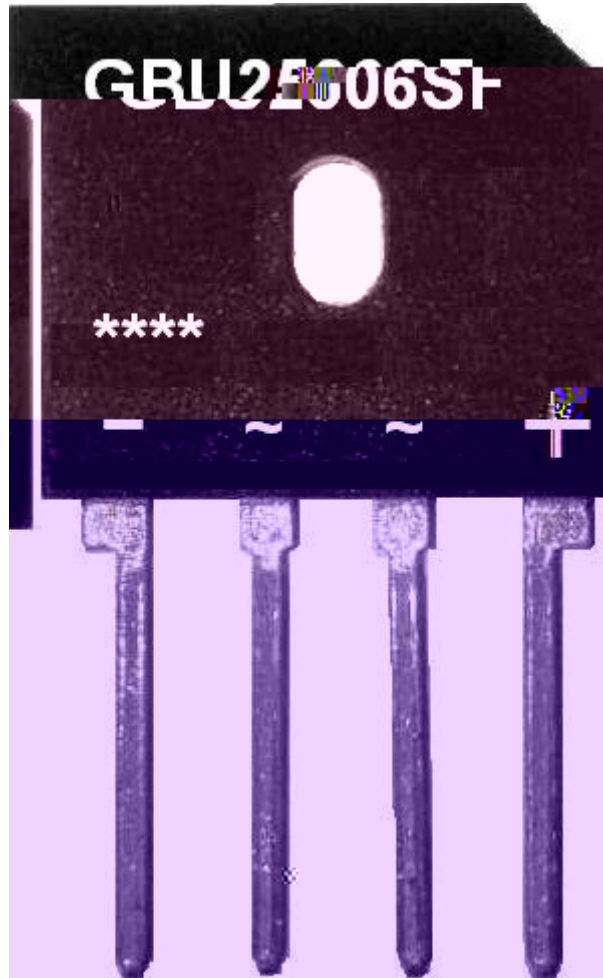

- AC +

- AC + Pin function

() / Temperature Profile for Dip Soldering(Pb-Free)

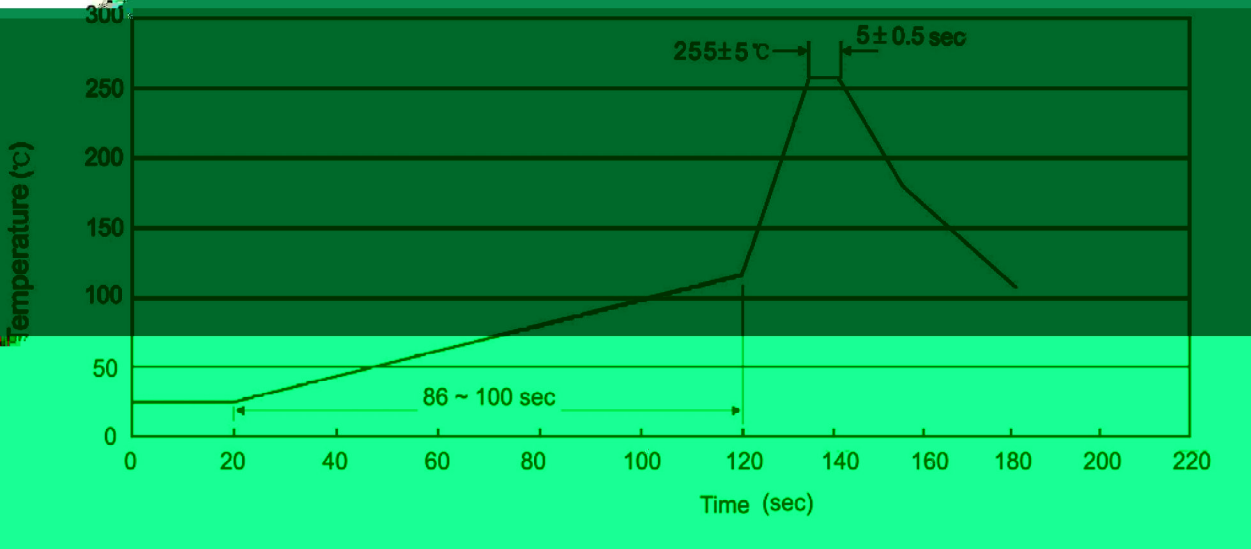

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
GBU	-	-	500	10	5,000	-	230×205×48	435×240×255

/ Notices