


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

			℃
			℃


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

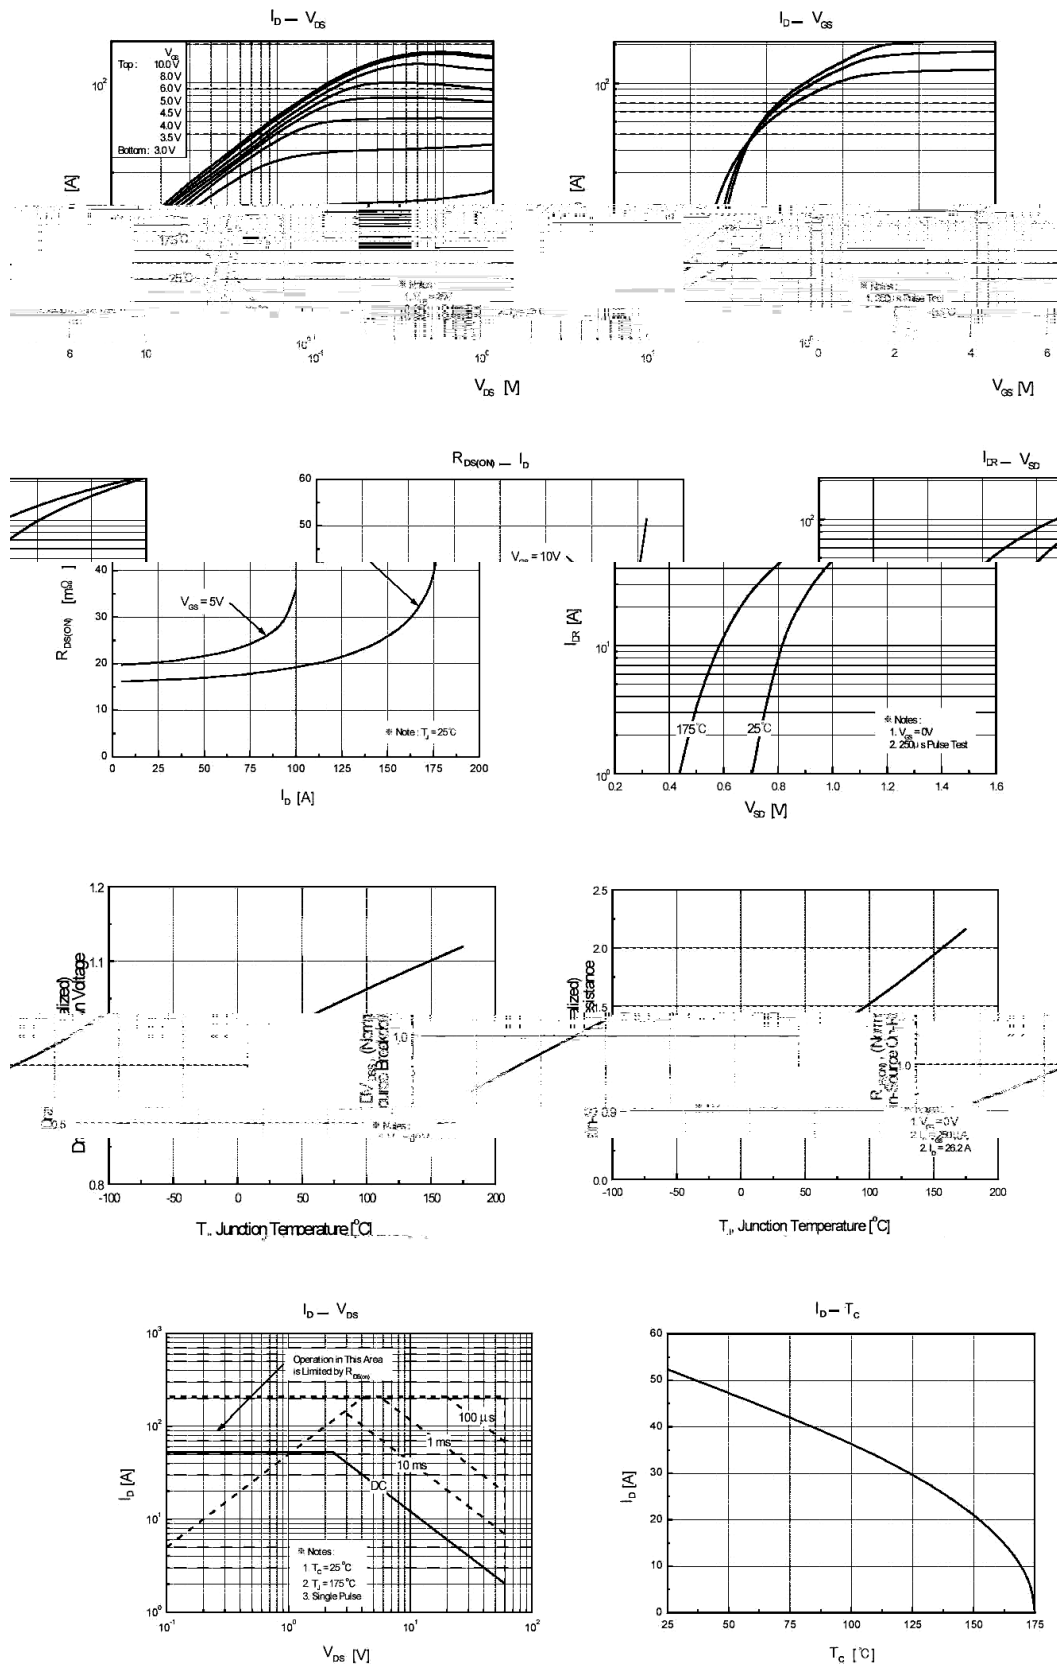


/ Package Dimensions

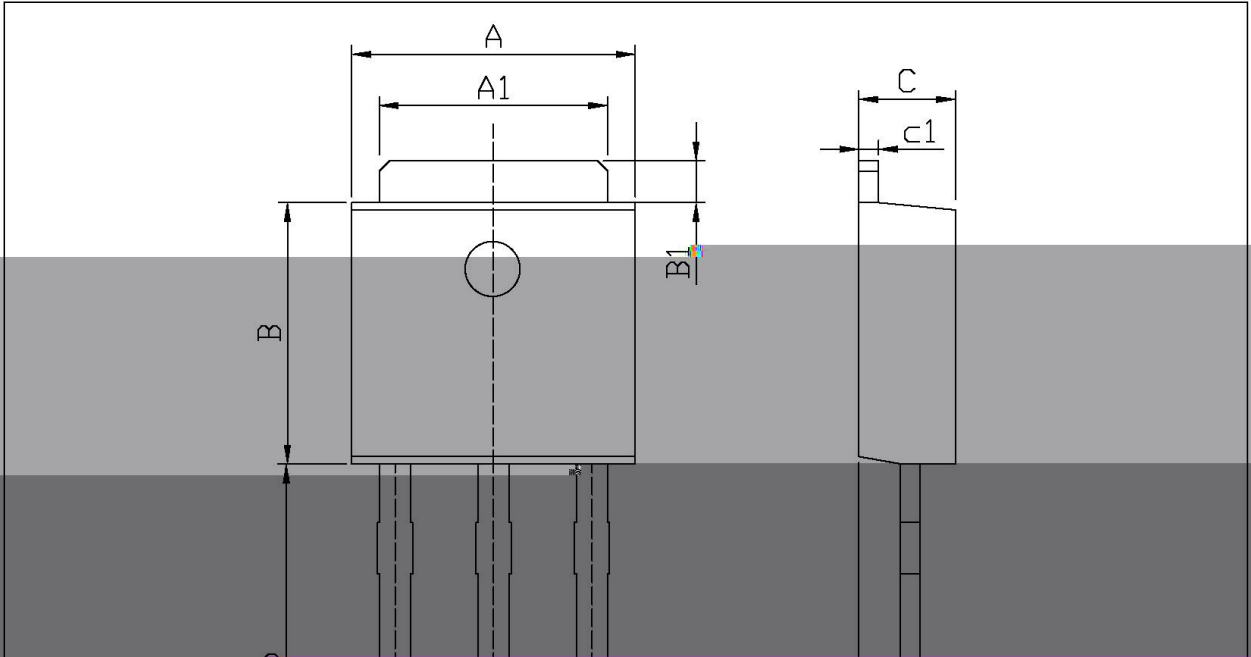


单位: mm

Dimensions In Millimeters			Symbol	Dimensions In Millimeters		Symbol
Min	Max			Min	Max	
6.45	6.75		a	0.50	0.70	A
5.10	5.50		b	9.00	9.40	A
5.95	6.35		c	2.00	2.20	C

/ Marking Instructions

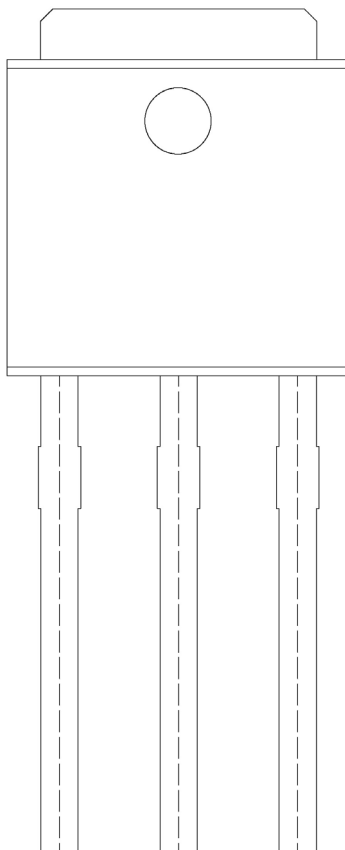

() / Temperature Profile for Dip Soldering(Pb-Free)

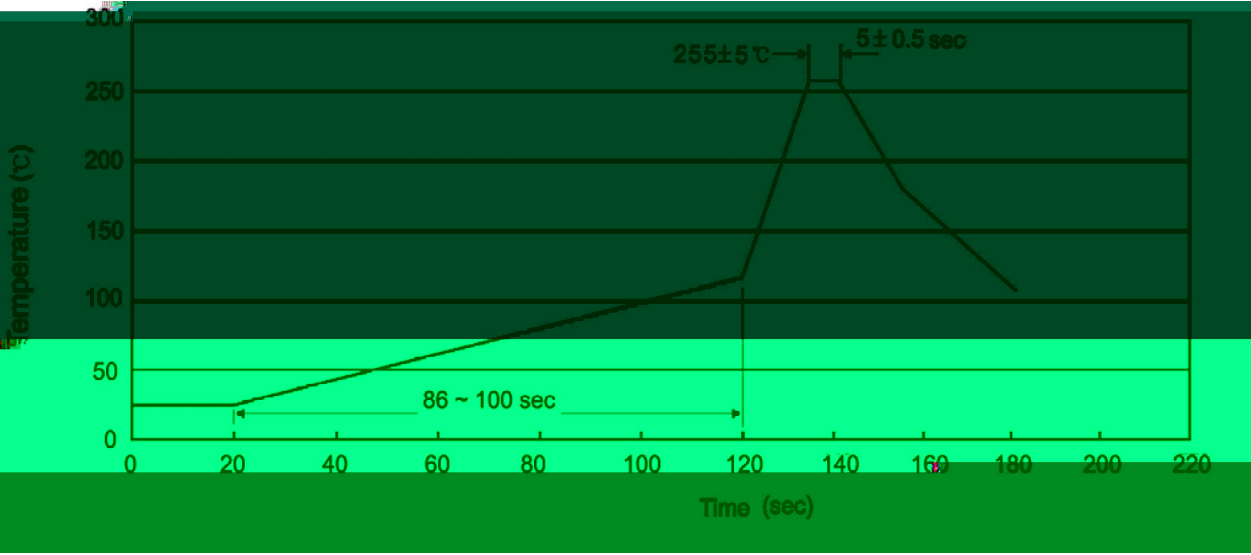

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices