


/ Descriptions

/ Features


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning

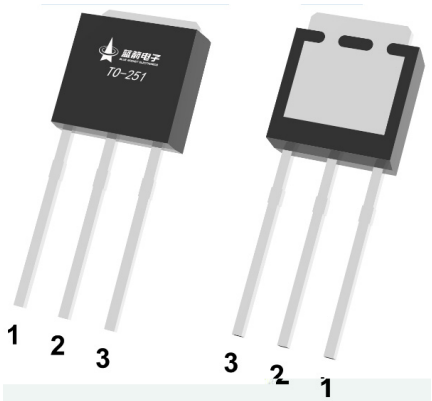


/ Marking

f=53.MHzj ET 53


0053<2.3771c (U55.62

/ Package Dimensions

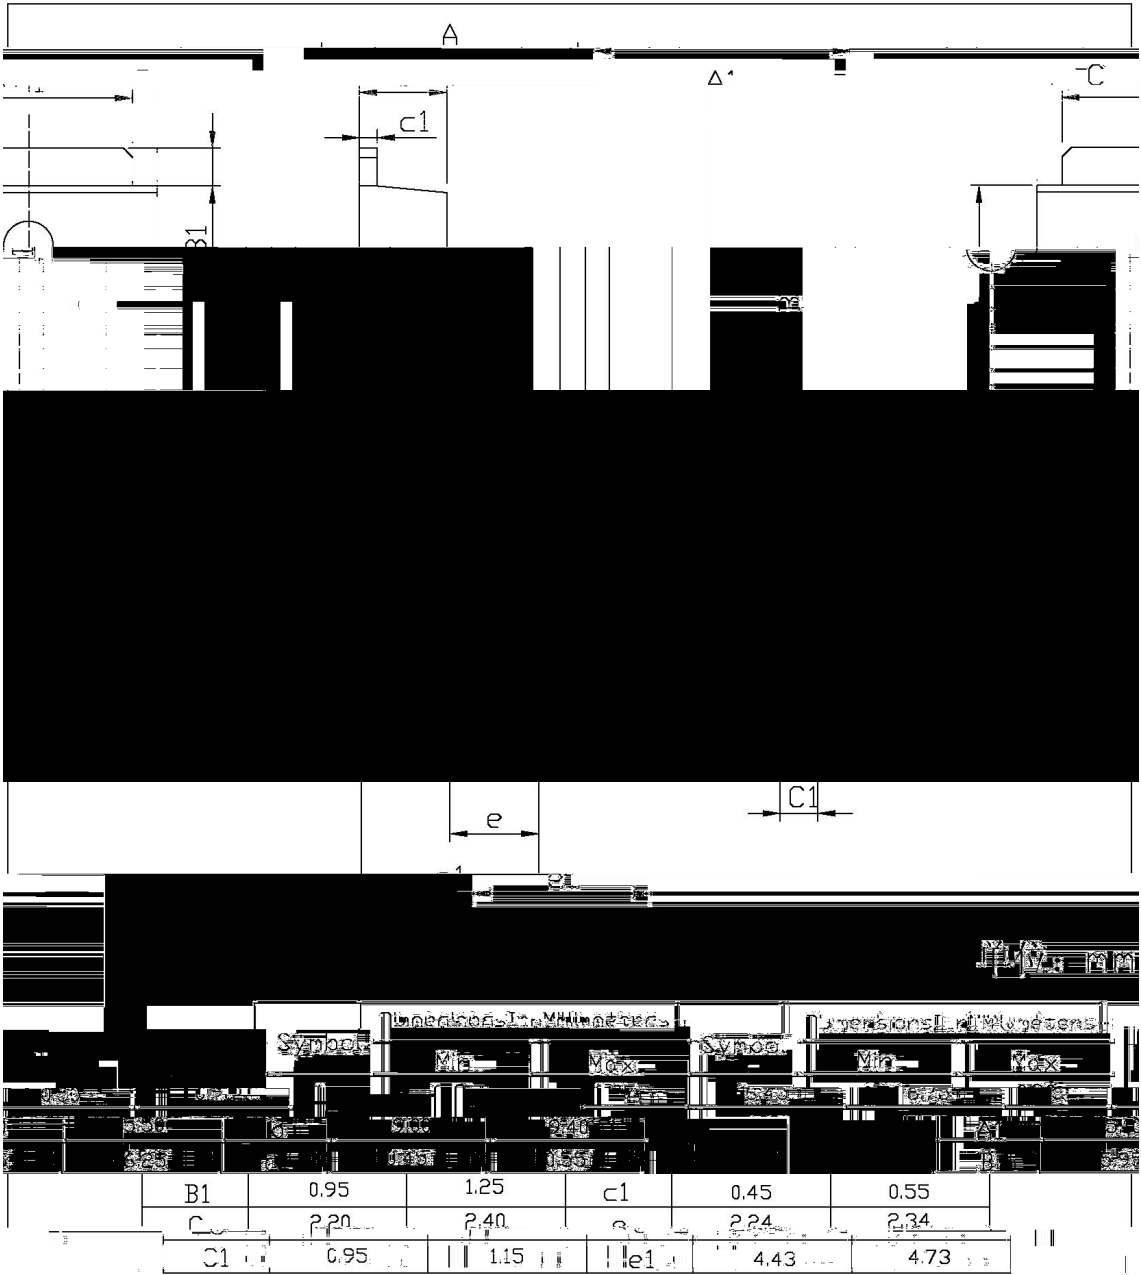

TC-251


/ Marking Instructions

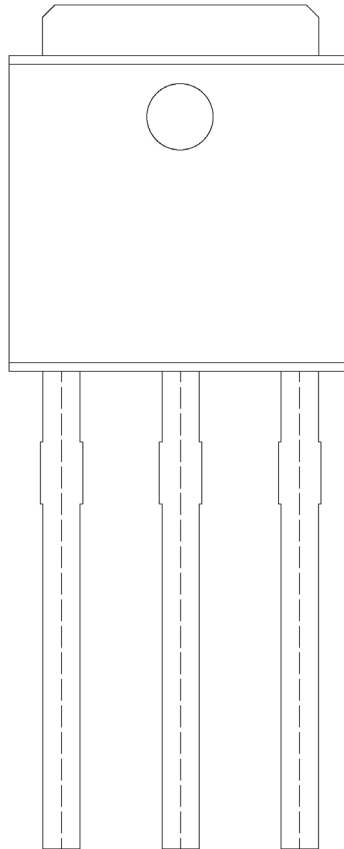

BR

740

() / Temperature Profile for Dip Soldering(Pb-Free)

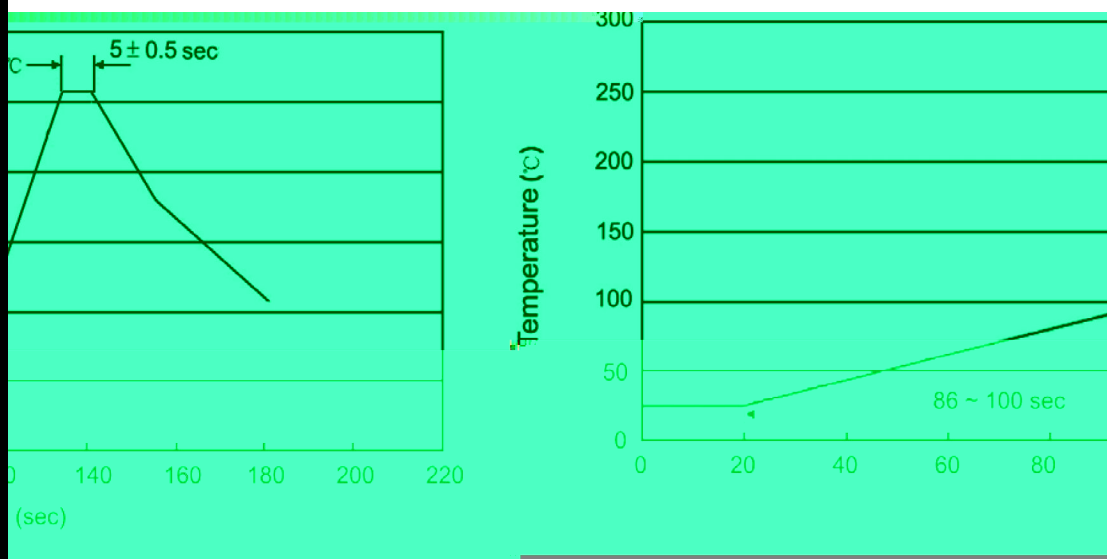

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

Packaging SPEC.