






Electrical Characteristic Curve




Electrical Characteristic Curve



Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
	A	6.25	2.20		B	2.40	5.95
	B	2.34	0.95		C	1.25	2.24
	C	7.13	0.70		D	0.55	2.40
	D	10.35	0.45		E	0.55	9.88
	E				F		
	F				G		
	G				H		
	H				I		
	I				J		
	J				K		
	K				L		
	L				M		
	M				N		
	N				O		
	O				P		
	P				Q		
	Q				R		
	R				S		
	S				T		
	T				U		
	U				V		
	V				W		
	W						

TO-252


, M y f / Marking Instructions

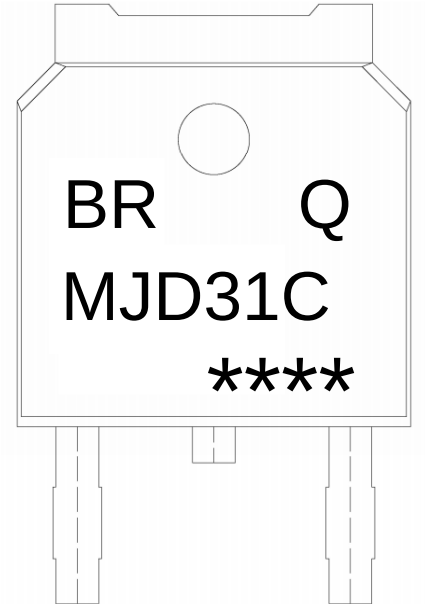

^a ¢ y	
BR y	, [W A
Q y	V ñ —)í D } ö œ
3 0 *) y	D } ° Z
y	ÿ D Z W A k š Ÿ D Z J
Note:	
BR:	Company Code
Q:	Automobile halogen-free product Code
MJD31C:	Product Type
*****:	Lot No. Code, code change with Lot No

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HPSHUDWUXUH

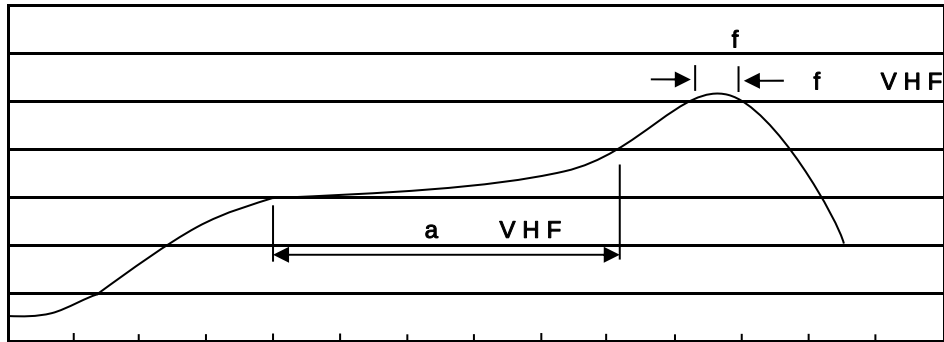

7LPH VHF

ačy

Note:

- 10• Ä ½ “† 150 ½200 - k ž • 60 ½120sec; 1.Preheating:150~200 - , Time:60~120sec.
- 20• Q > “† 255 r5 - k ž • 4 Ò 5 r0.5sec; 2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.
- 30•D N ò i Ò 0 ,† 2 ½10 - /sec. 3. Cooling Speed: 2~10 - /sec.

ÂD /Că p ¯ »] / Resistance to Soldering Heat Test Conditions

“†y 260 r5 - ž •y 10 r1 sec. Temp.:260±5 Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û ĤH					Dimension ;>û p . (unit Åmm³)		
	Units/Reel /-	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
TO-252	2,500	2	5,000	6	30,000	s ×16	360×360×50	380×335×86

ì' x / TUBE

Package Type 7>û ~ E	Units ;>û ĤH					Dimension ;>û p . (unit Åmm³)		
	Units/Tube /•1×	Tubes/Inner Box •1× /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Tube•1×	Inner Box	Outer Boxç
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

„Đ y f / Notices