

/ Descriptions


TO-252 PNP

/ Features


AEC-Q101

/ Applications

/ Equivalent Circuit




/ Pinning

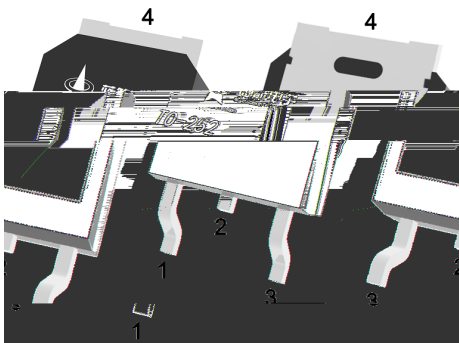


/ h_{FE} Classifications & Marking

BRMJD32CQ

/ Electrical Characteristic Curve

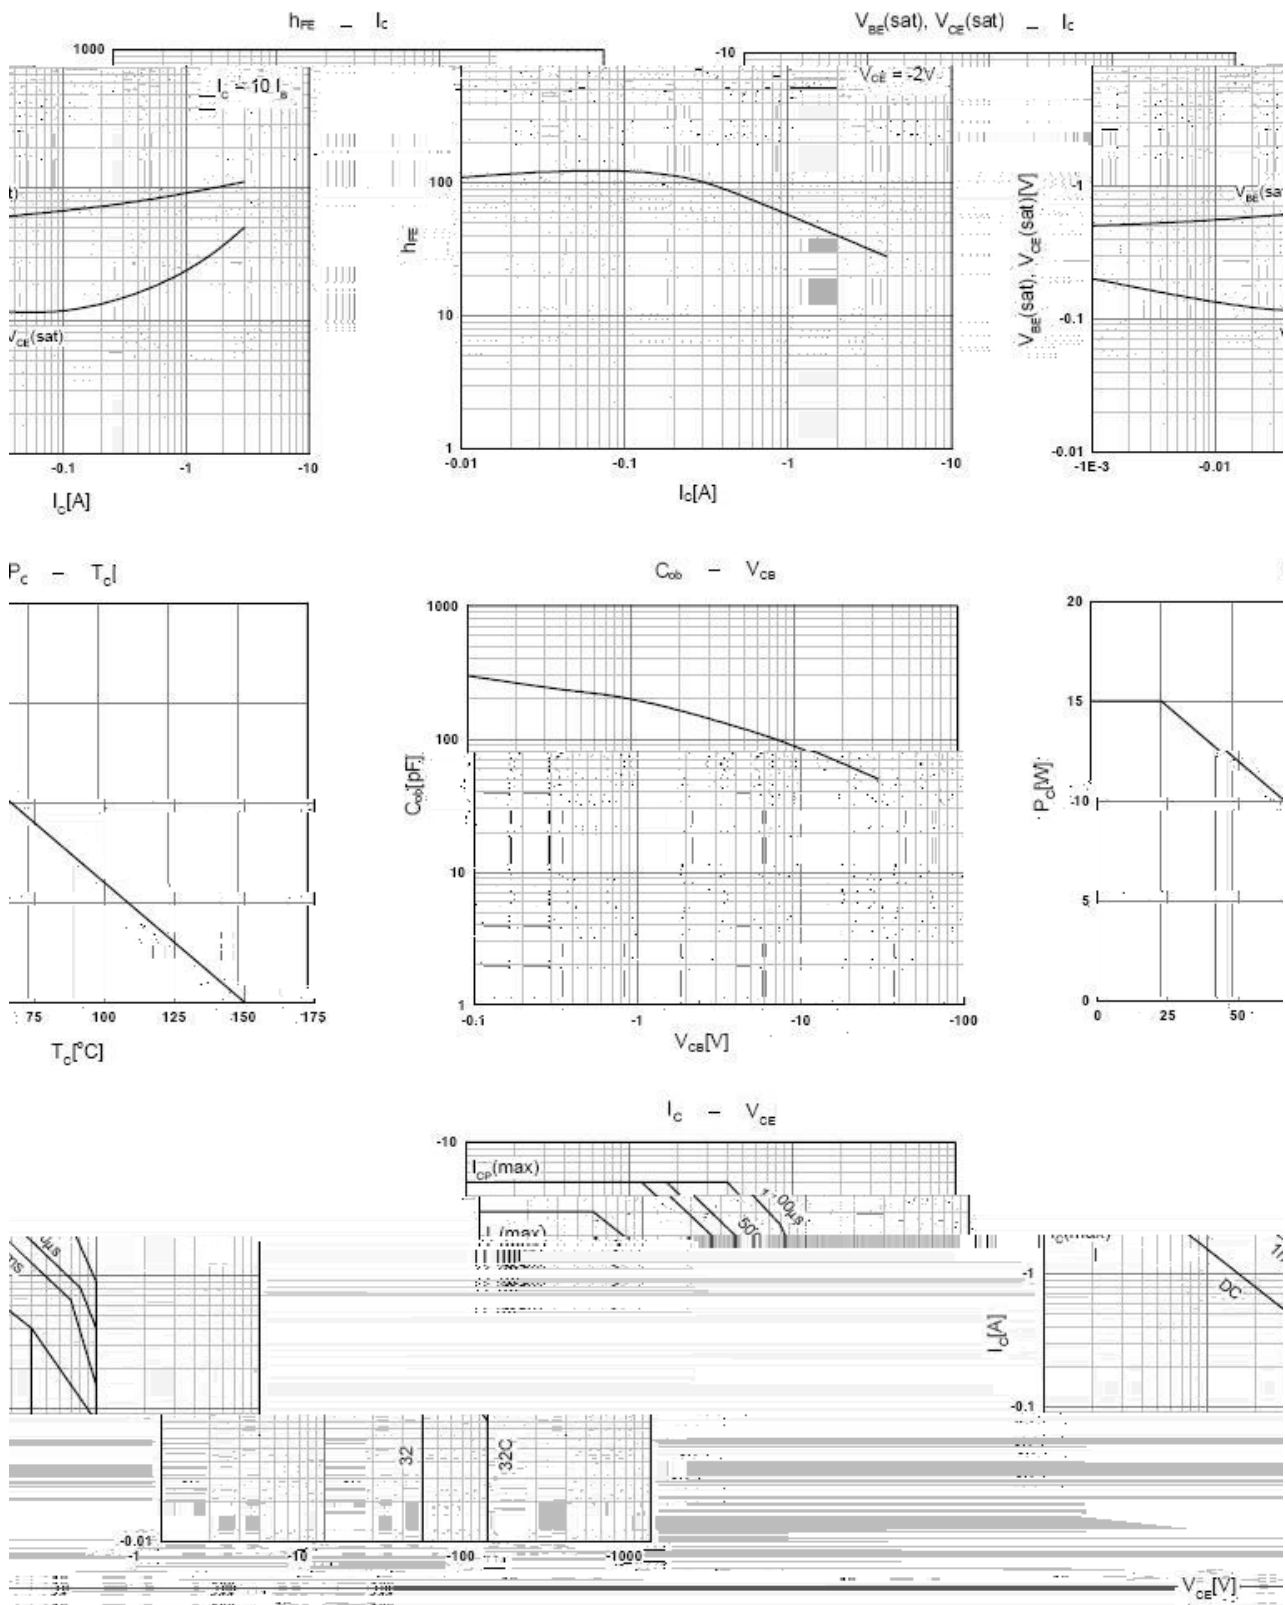

/ Package Dimensions

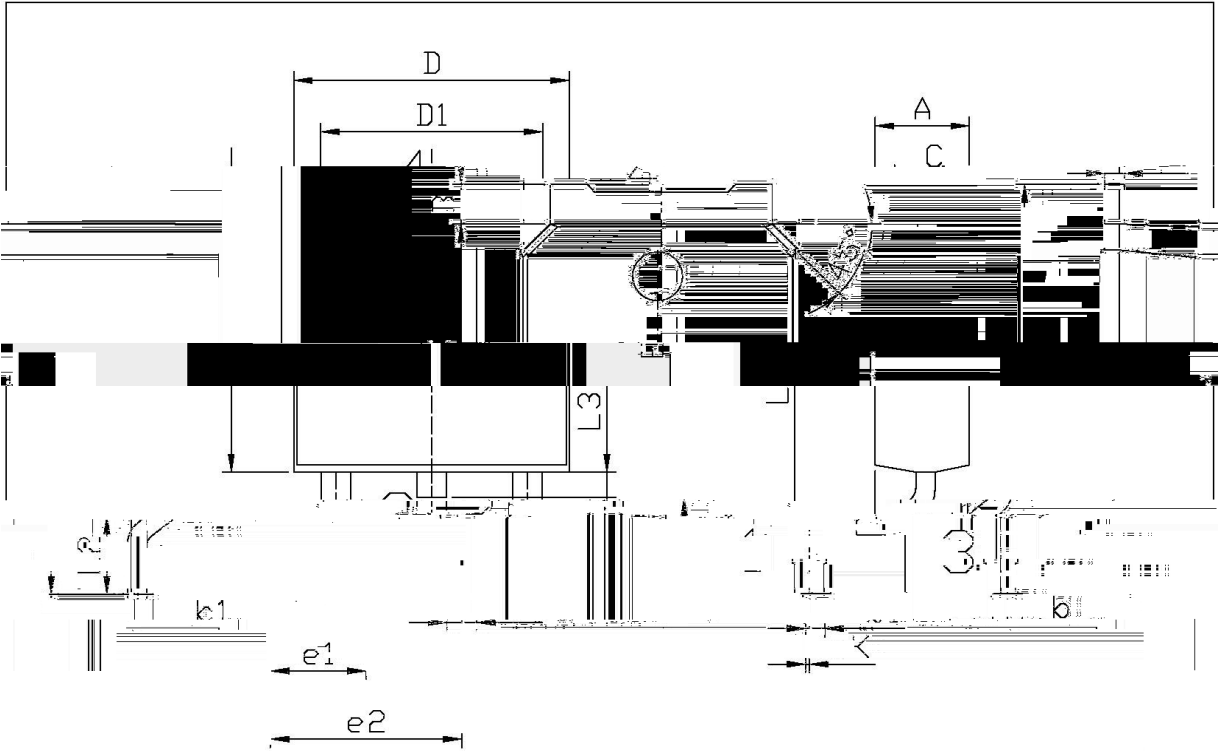


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
F	5.95	6.25	A	2.20	2.40
e1	2.24	2.34	B	0.95	1.05
e2	4.70	4.73	b1	0.70	0.75
L1	9.85	10.35	b1	0.45	0.50
L	0.55	1.20	J2	1.70	2.00
L1	0.60	0.90	D1	6.45	6.75
L1	0.50	0.10	D1	5.10	5.50
			K		

T0-252

/ Marking Instructions

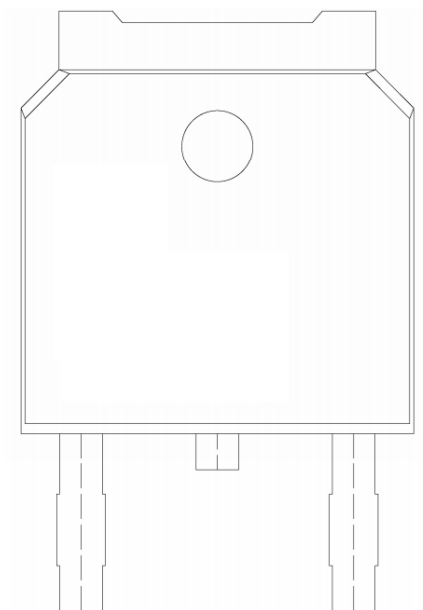

MJD32C

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

$\pm$

$\pm$

$\pm$

$\pm$