


/ Descriptions		
TO-252	SiC	TO-252


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

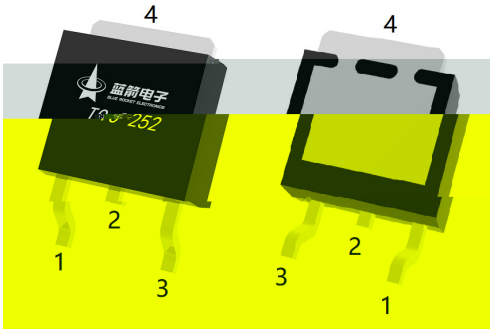

/ Marking


/ Absolute Maximum Ratings(Ta=25)

℃			
	θ		℃
			℃


/ Electrical Characteristics(Ta=25)

		℃				
		℃				
	()	℃				
		℃				
		℃,				

/ Electrical Characteristic Curve

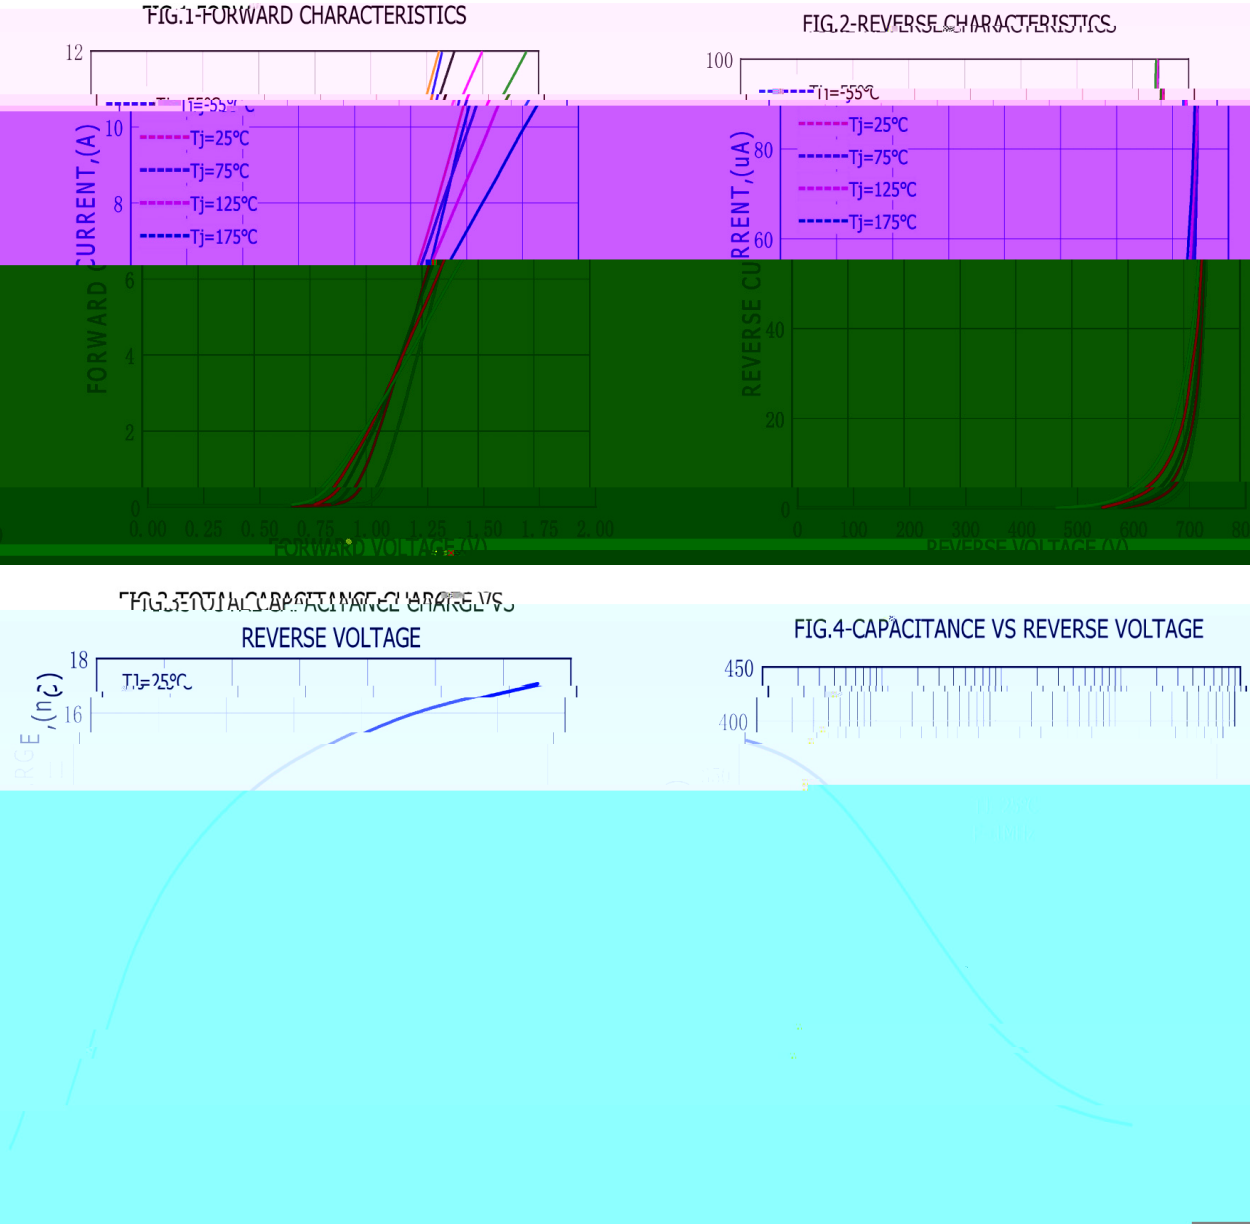

/ Package Dimensions

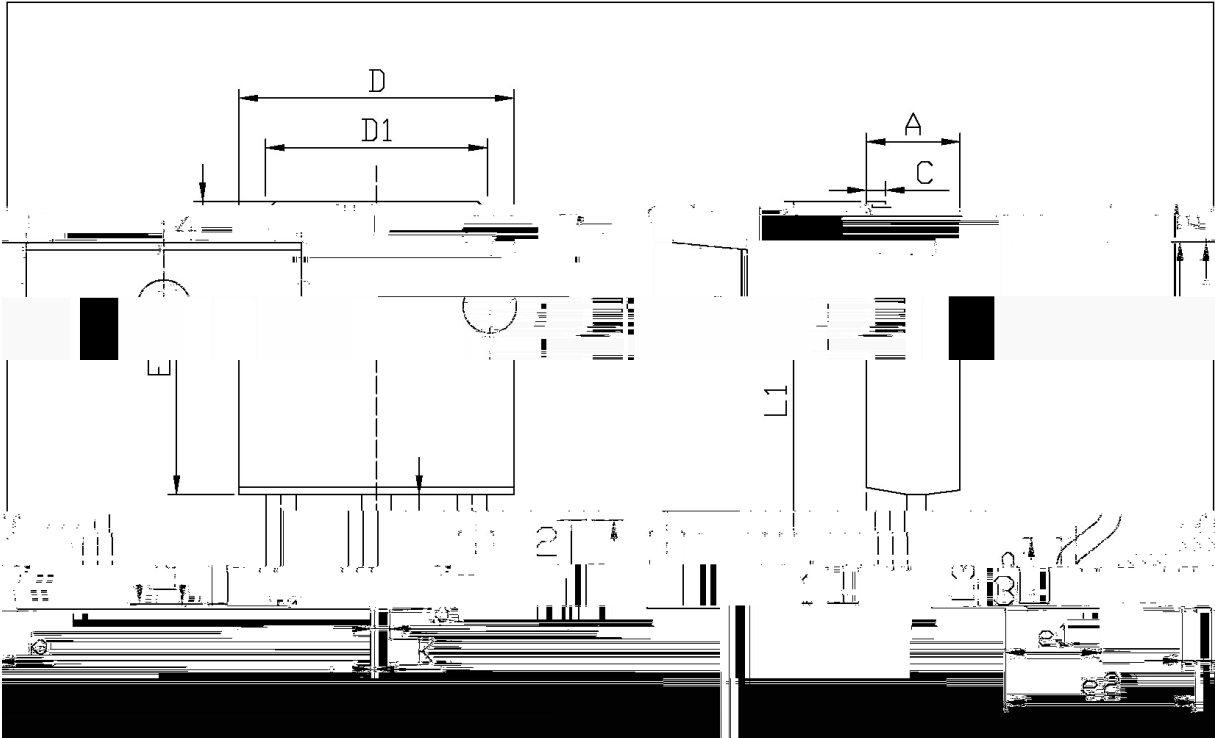

单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
C	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

T0-252

BRSC06650DP



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

