

/ Descriptions

20~200V 2.0A

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

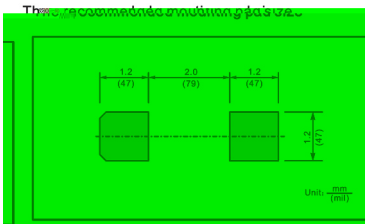


/ Marking

/ Electrical Characteristic Curve

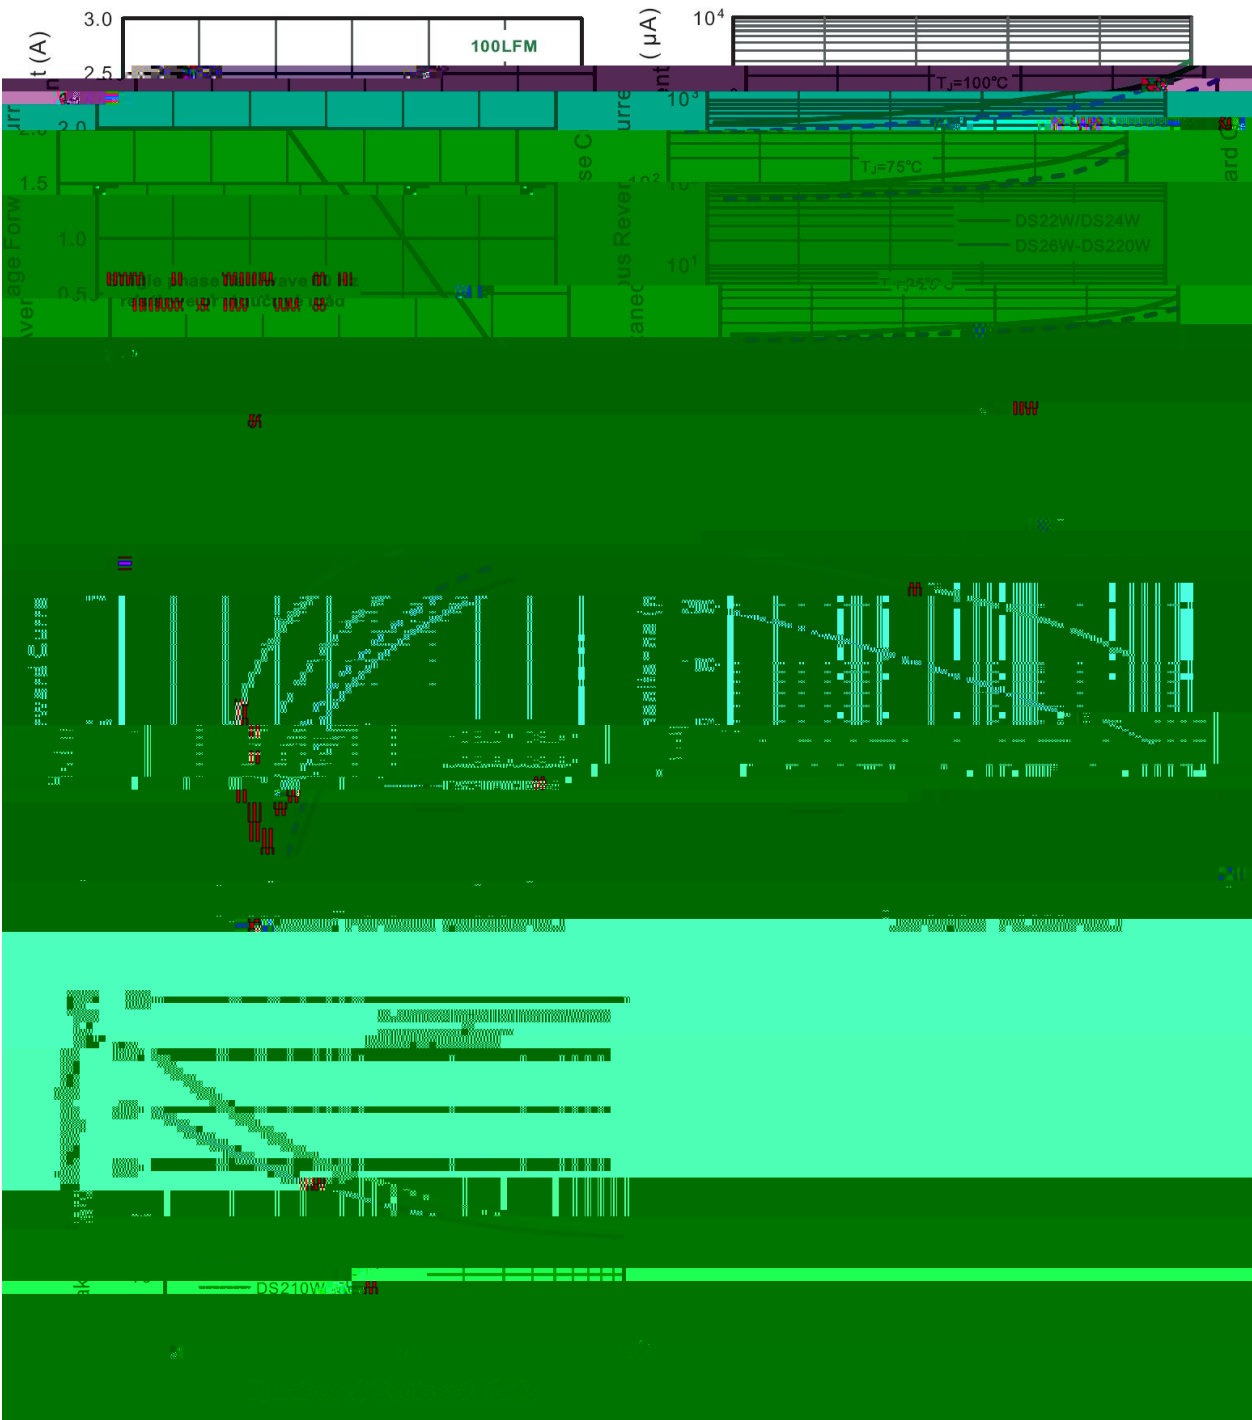

/ Package Dimensions

SOD-123FL

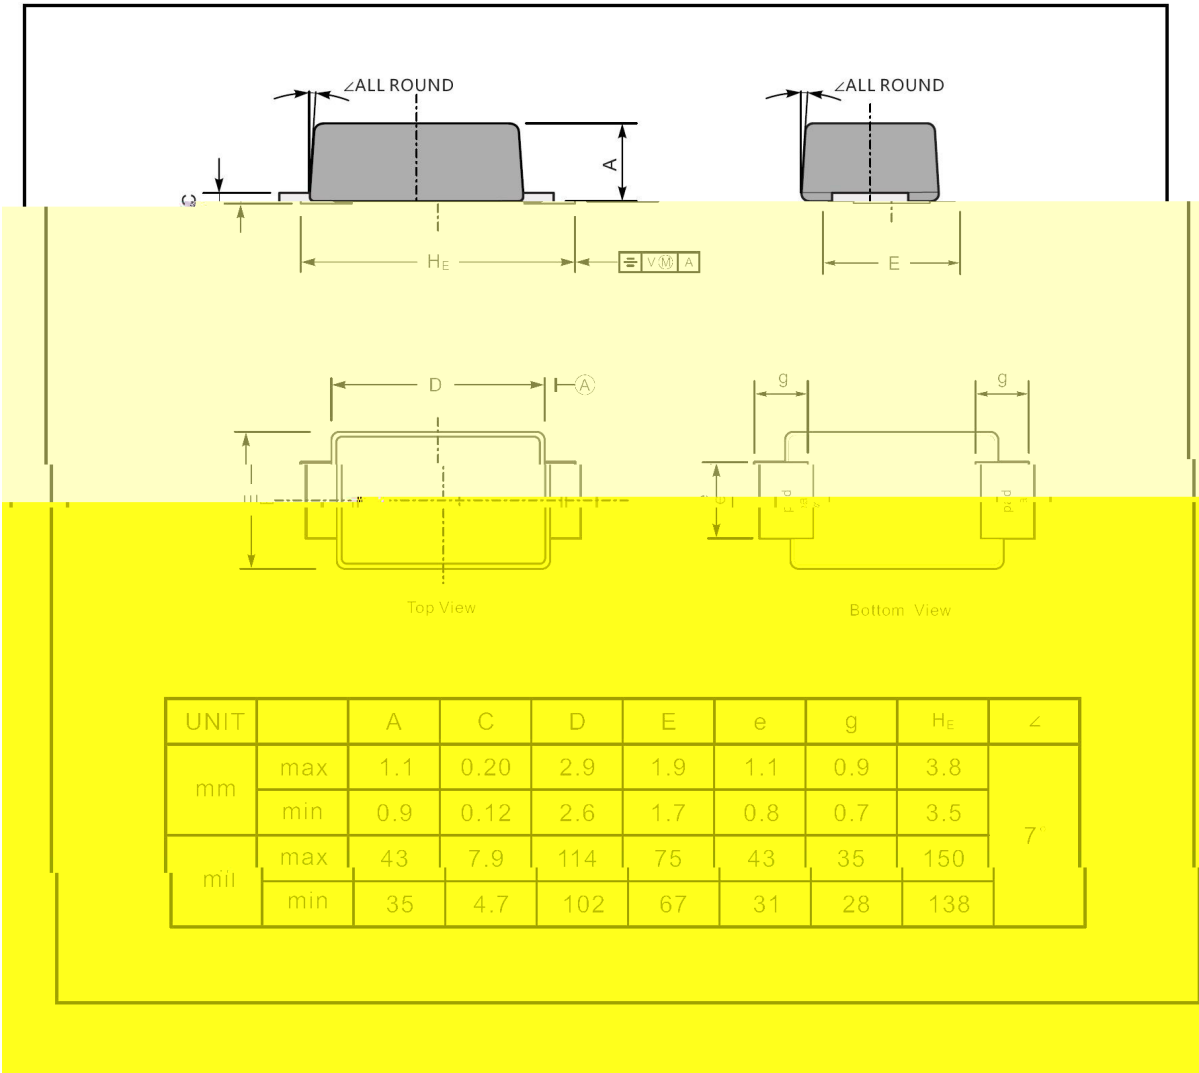


/ Marking Instructions

Marking

Type number	Marking code
DS22W	S22
DS24W	S24


	DS26W	S26
	DS28W	S28
0	DS210W	S210
2	DS212W	S212
5	DS215W	S215
0	DS220W	S220

/ Marking Instructions

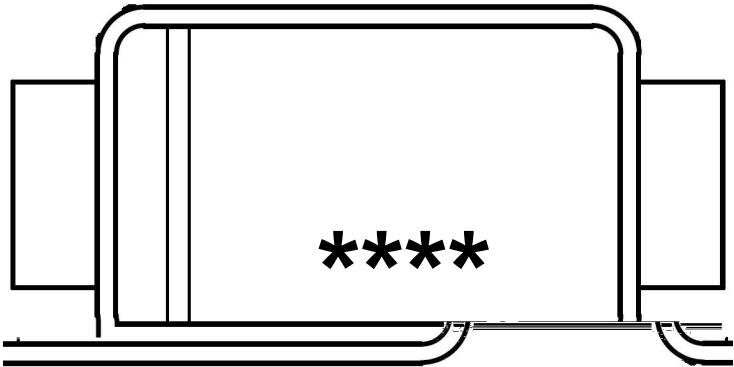

S22			
****	1 *	3 *	
S22			
****	*		*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

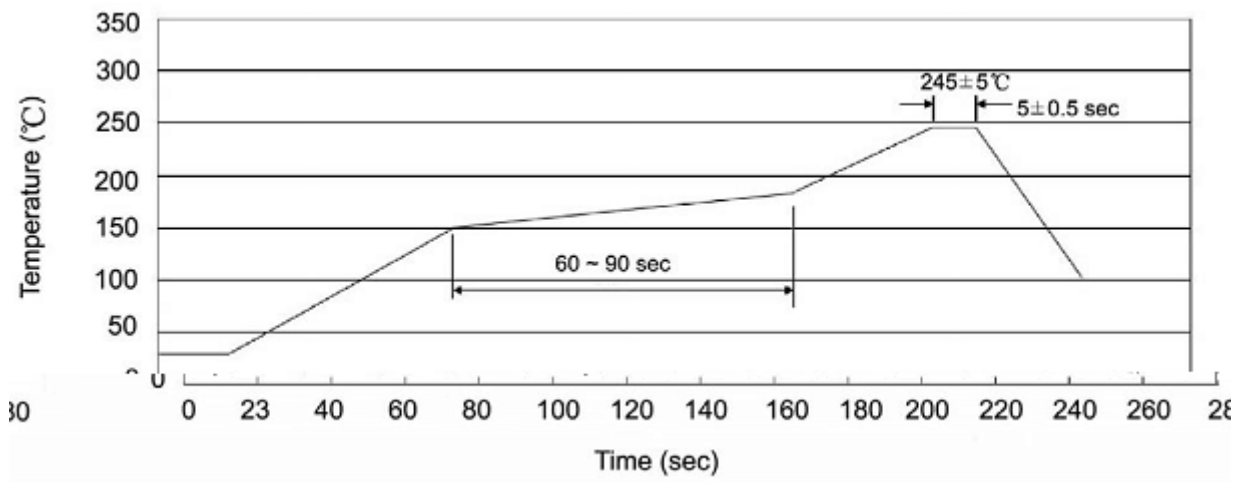

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装 式	包 装 量					包 装 尺 寸		
	Units/Reel /卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box /盒	Inner Boxes/Outer Box 盒/	Units/Outer Box /	Reel	Inner Box 盒	Outer Box

/ Notices