

/ Descriptions


WR0<5+U, QSQ

/ Features

/4 Z / HG4 ; 35

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~	~	~


/ Absolute Maximum Ratings(Ta=25)

		~	


/ Electrical Characteristics(Ta=25)

		℃				

/ Package Dimensions

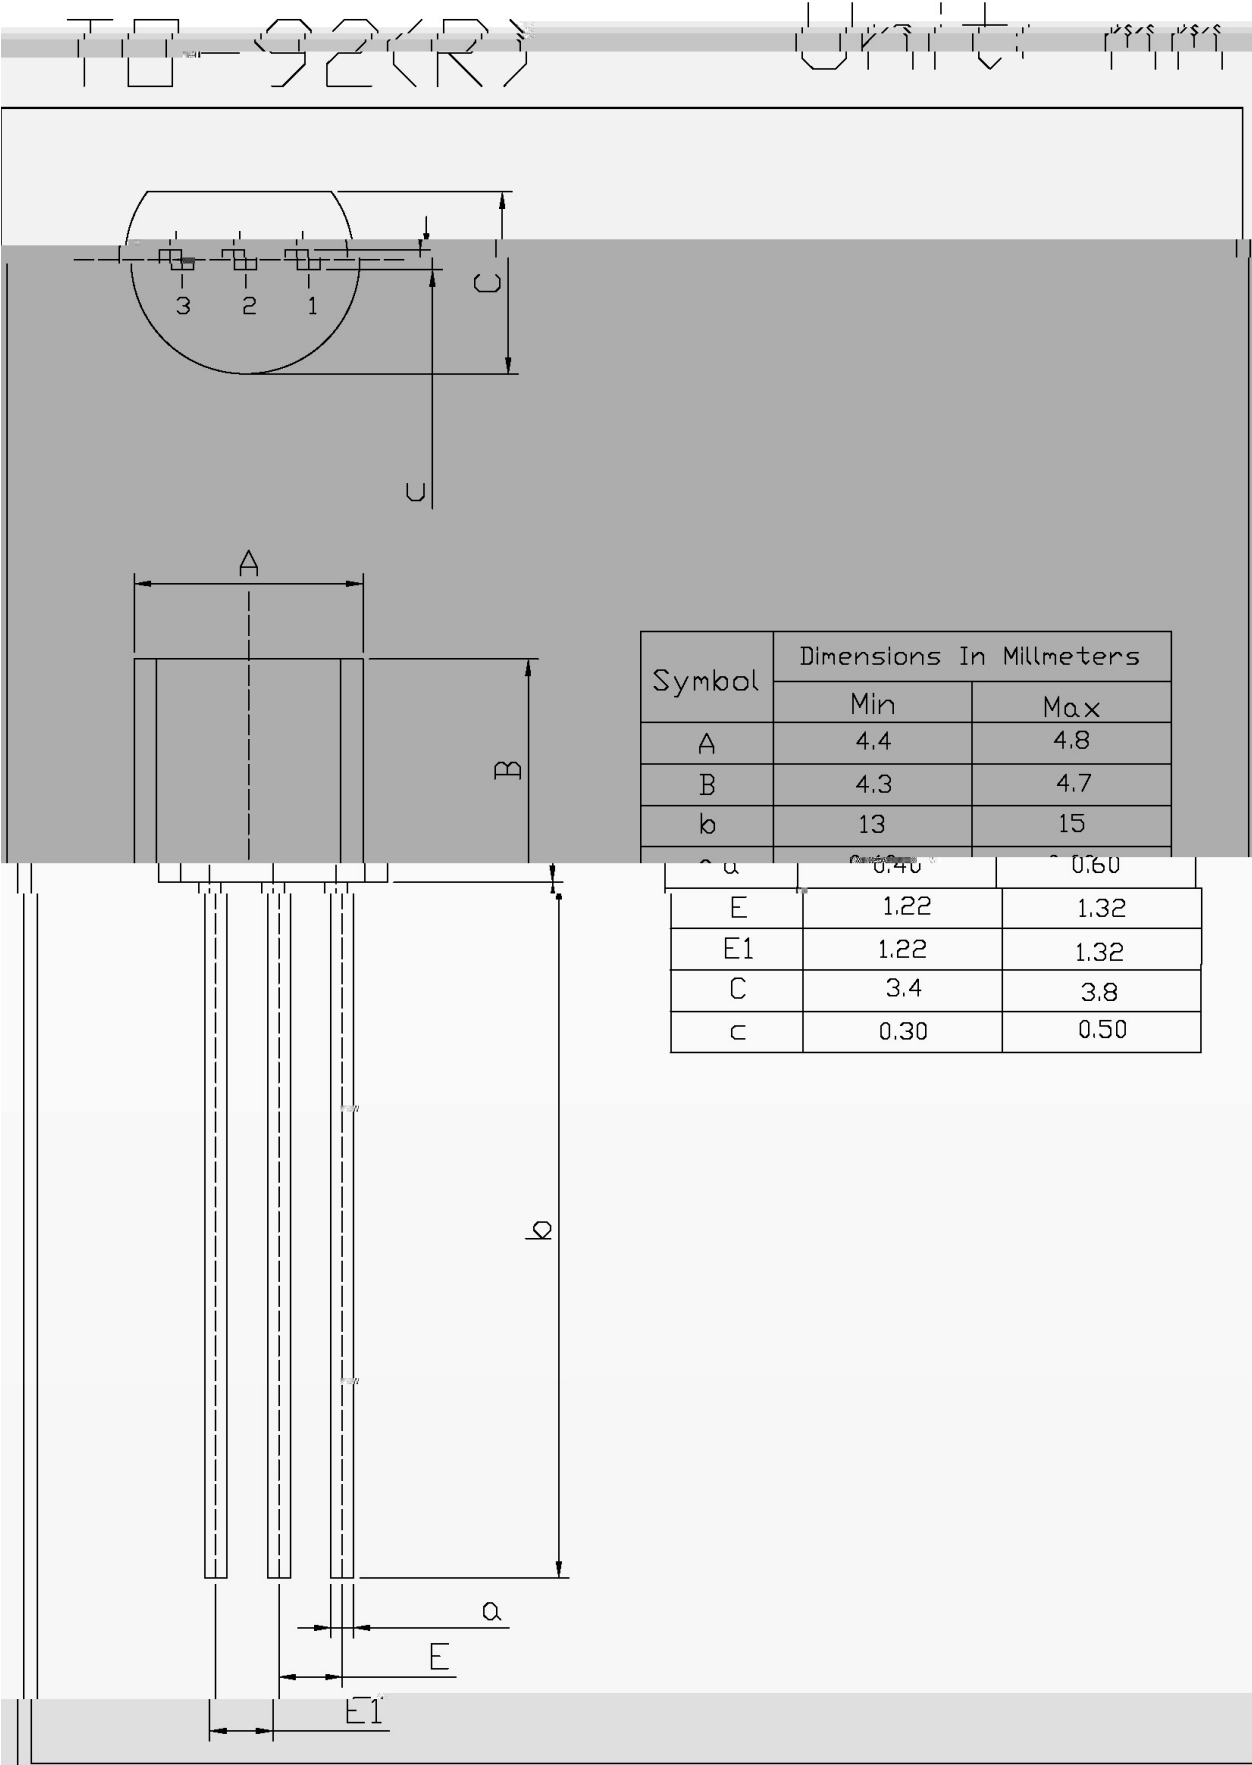

/ Marking Instructions

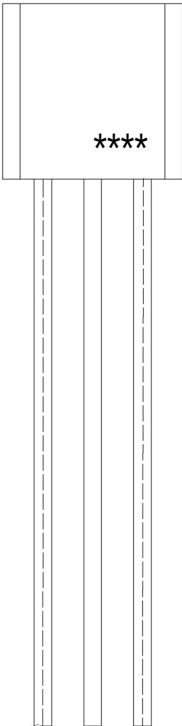


EU

4:35

0

k_{IH}

() / Temperature Profile for Dip Soldering(Pb-Free)

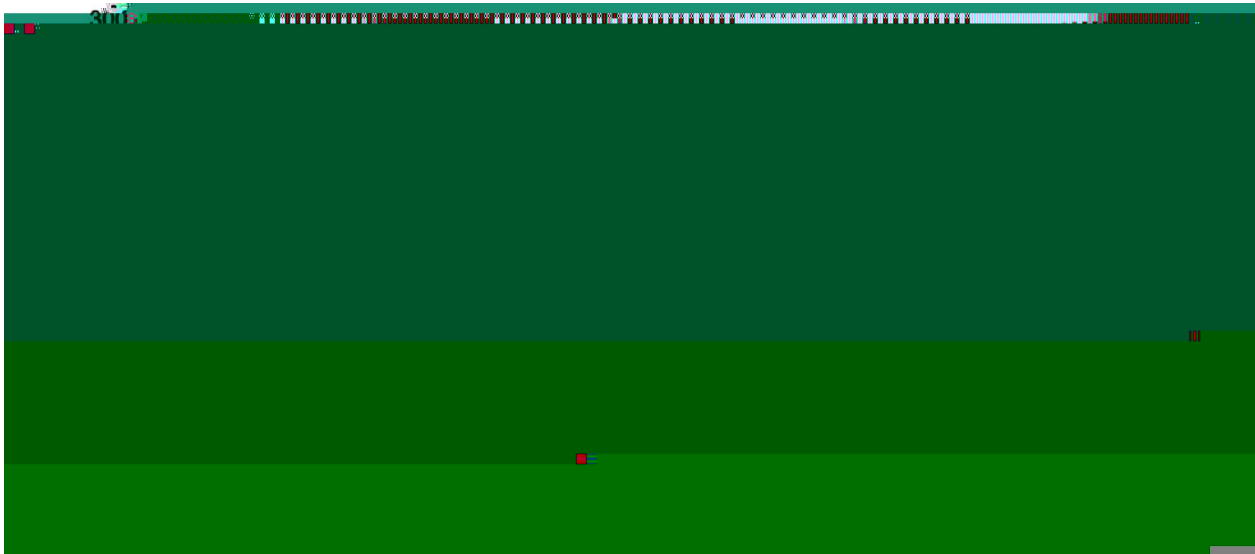

$\frac{3}{8}$

2

$\frac{3}{8}$

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

$\frac{3}{8}$

2

/ Resistance to Soldering Heat Test Conditions

2

$\frac{3}{8}$

2

/ Packaging SPEC.