

/ Descriptions

TO-220 N MOS N-CHANNEL MOSFET in a TO-220 Plastic Package.



/ Features

Low gate charge, low crss, fast switching.

/ Applications

DC/DC

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

/ Equivalent Circuit**/ Pinning**

PIN1 G

PIN 2 D

PIN 3 S

/ h_{FE} Classifications & Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	200	V
Drain Current	$I_D(T_C=25^{\circ}C)$	9.0	A
	$I_D(T_C=100^{\circ}C)$	5.7	A
Pulsed Drain Current	I_{DM}	36	A
Gate-Source Voltage	V_{GSS}	± 30	V
Avalanche Current	I_{AR}	9.0	A
Single Pulsed Avalanche Energy	E_{AS}	162	mJ
Repetitive Avalanche Energy	E_{AR}	7.8	mJ
Total Power Dissipation	$P_D(T_C=25^{\circ}C)$	72	W


Junction and Storage Temperature Range

$T_J, T_{STG} = -55^{\circ}C \sim +150^{\circ}C$



/ Electrical Characteristic Curve

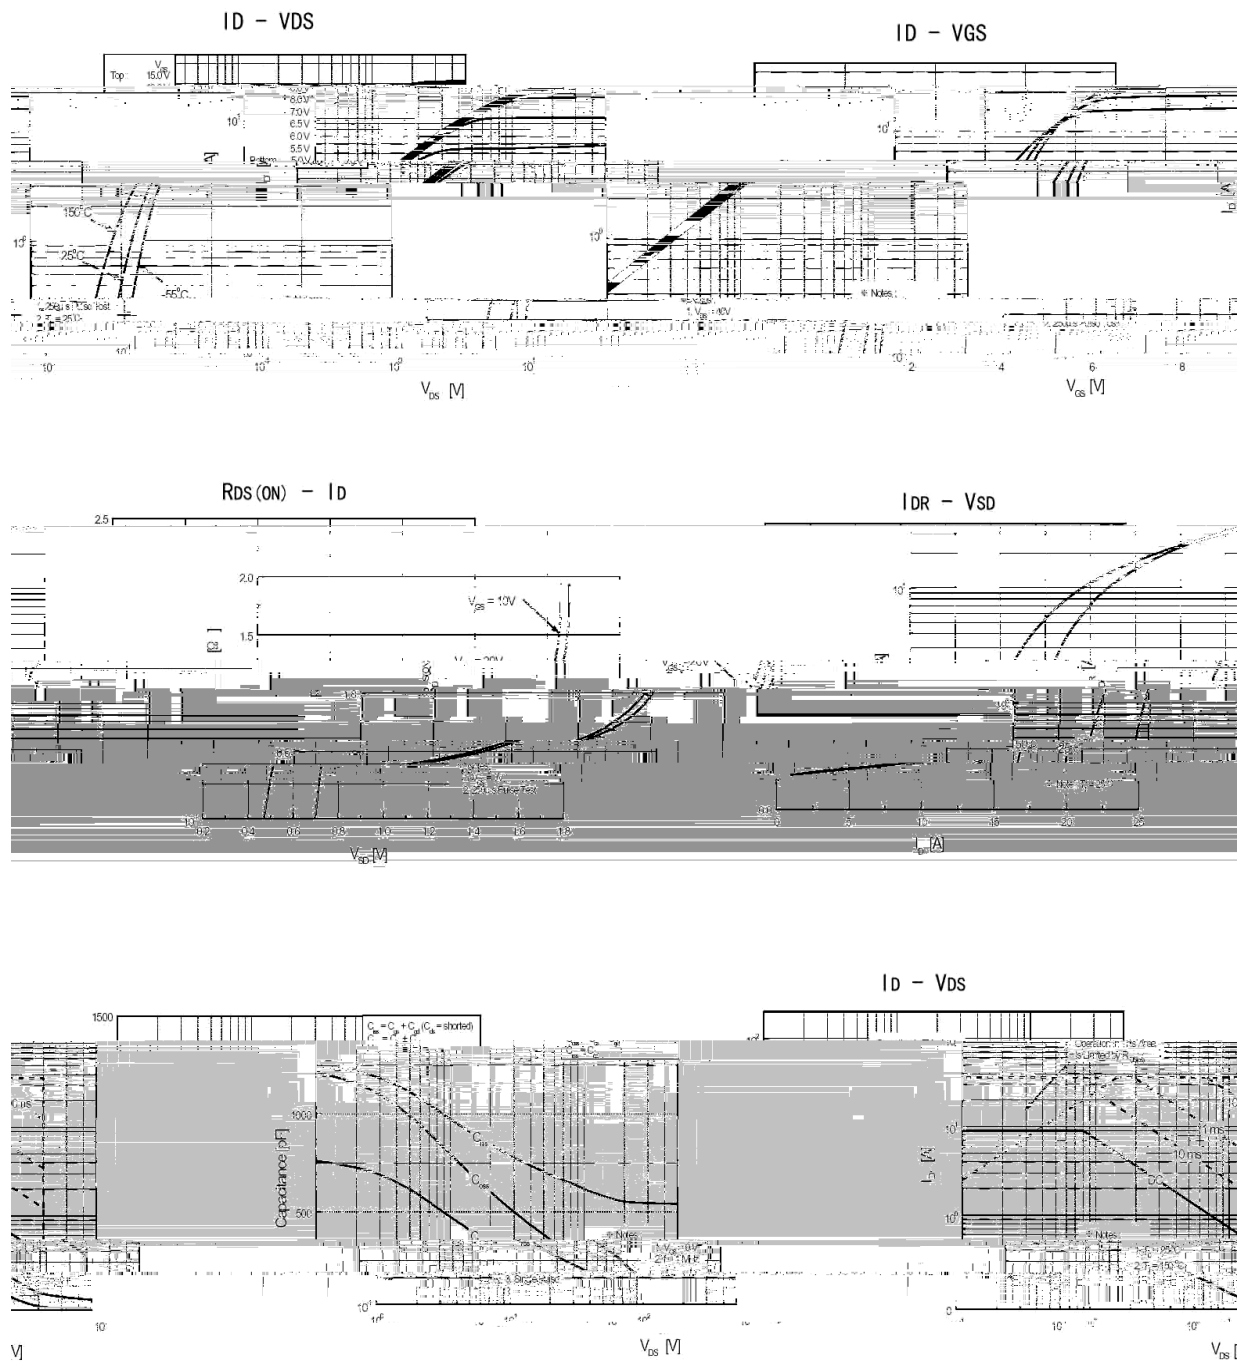

/ Electrical Characteristic Curve

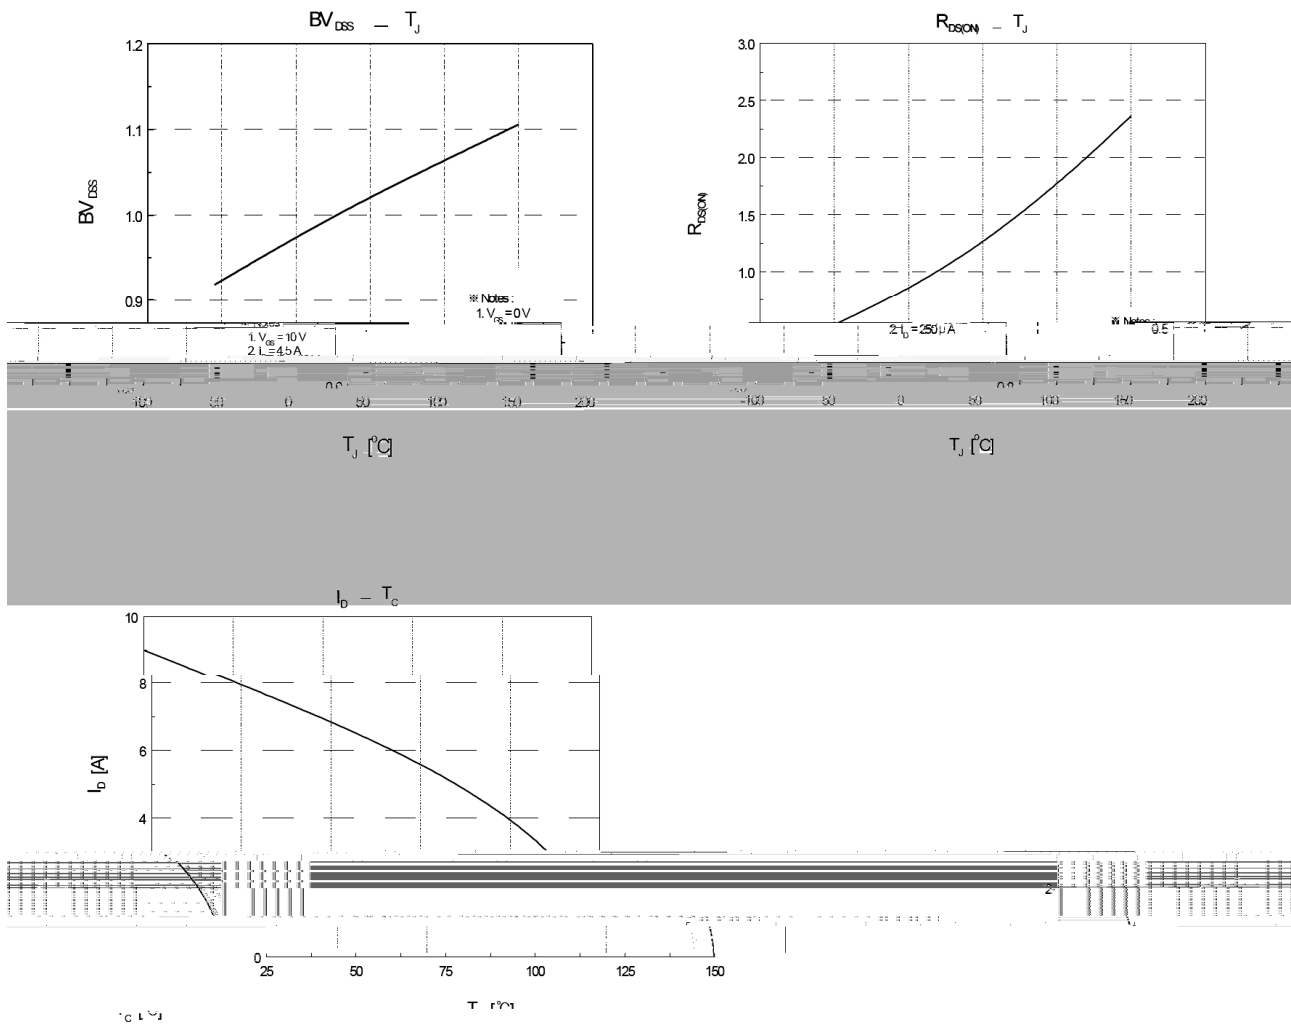


/ Package Dimensions

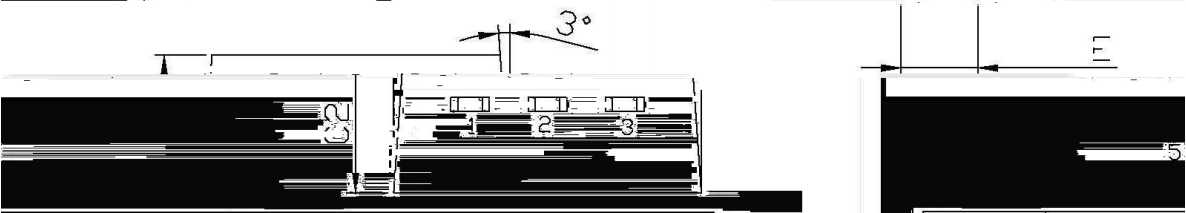

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
Δ	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
U	15.7	16.1	B1	9.0	9.4
b	12.6	13.6	C1	2.2	2.6
b1	9.6	10.6	a1	0.7	0.9
a	1.25	1.45	a2	1.25	1.45

/ Marking Instructions

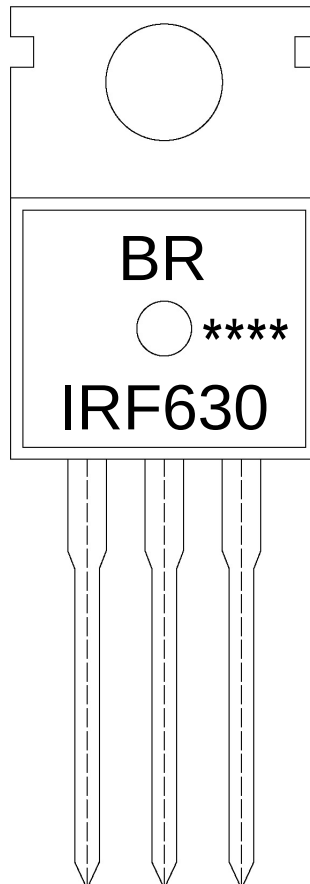

BR

IRF630


Note:

BR: Company Code

IRF630: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

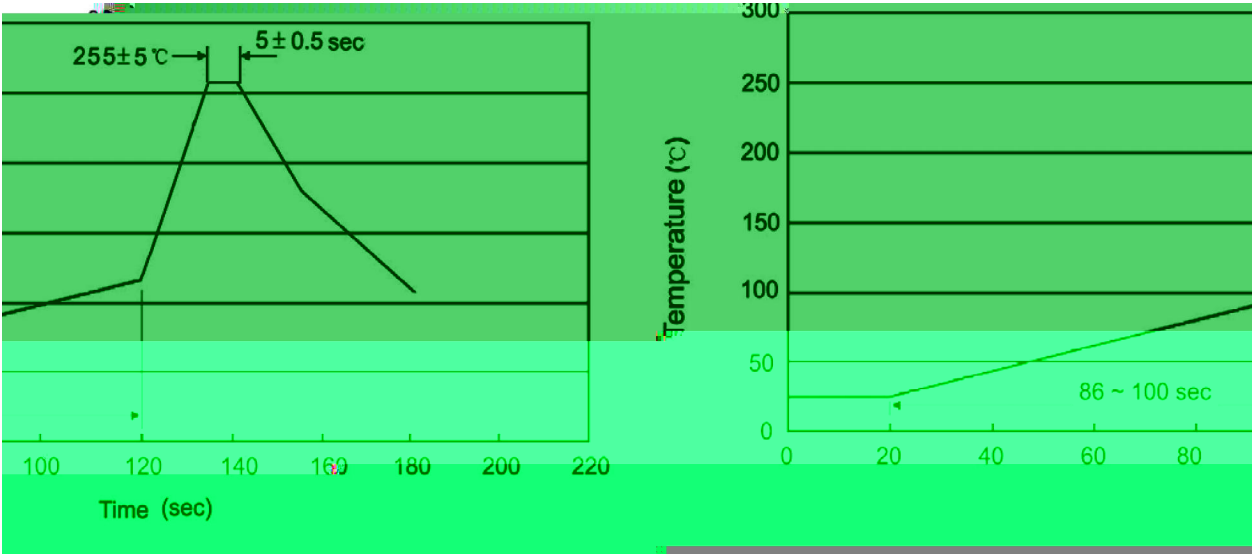

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices