


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ hFE Classifications & Marking




/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

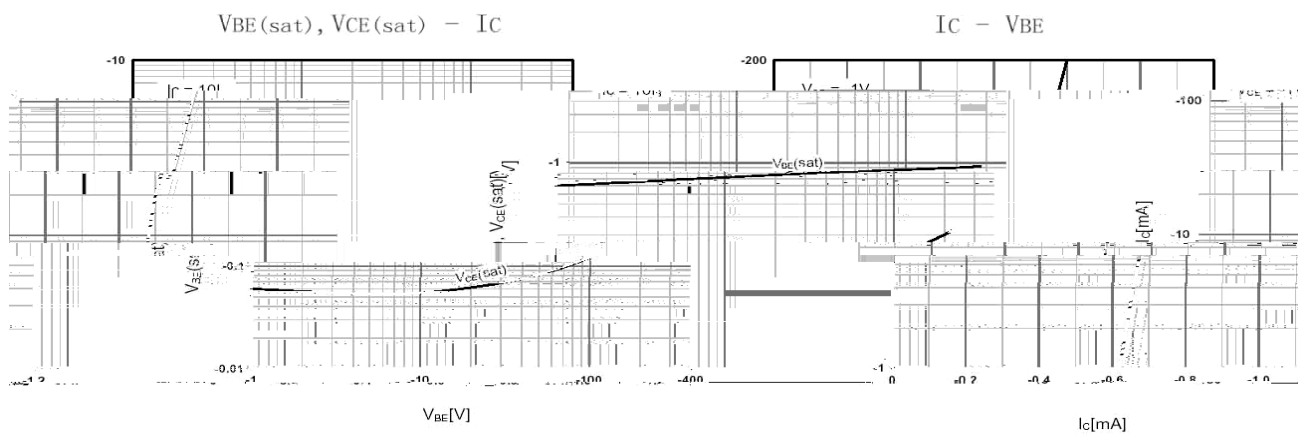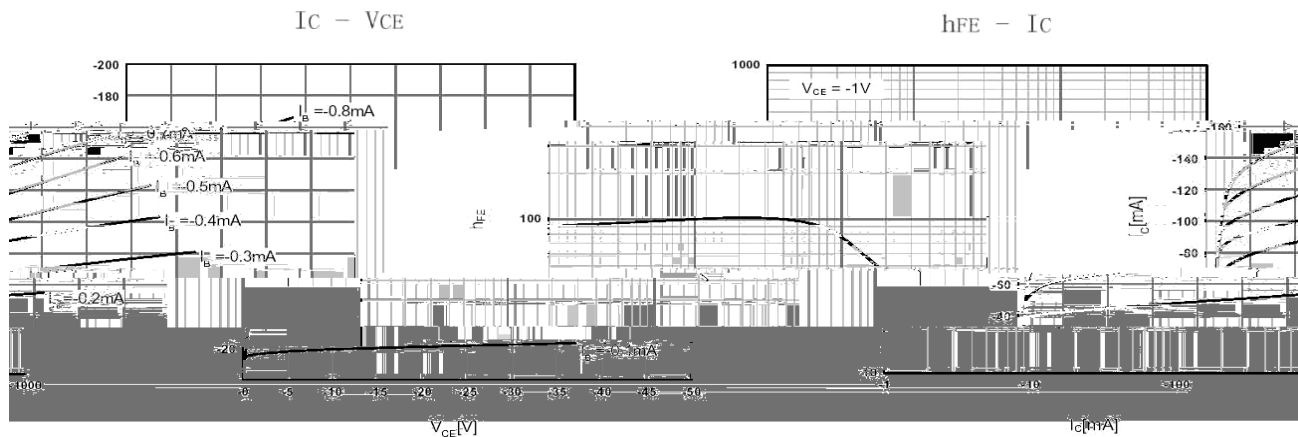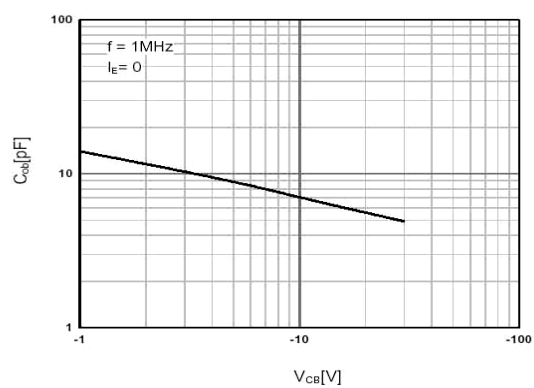 $C_{ob} - V_{CB}$ 


/ Package Dimensions

T0-92


Unit: mm

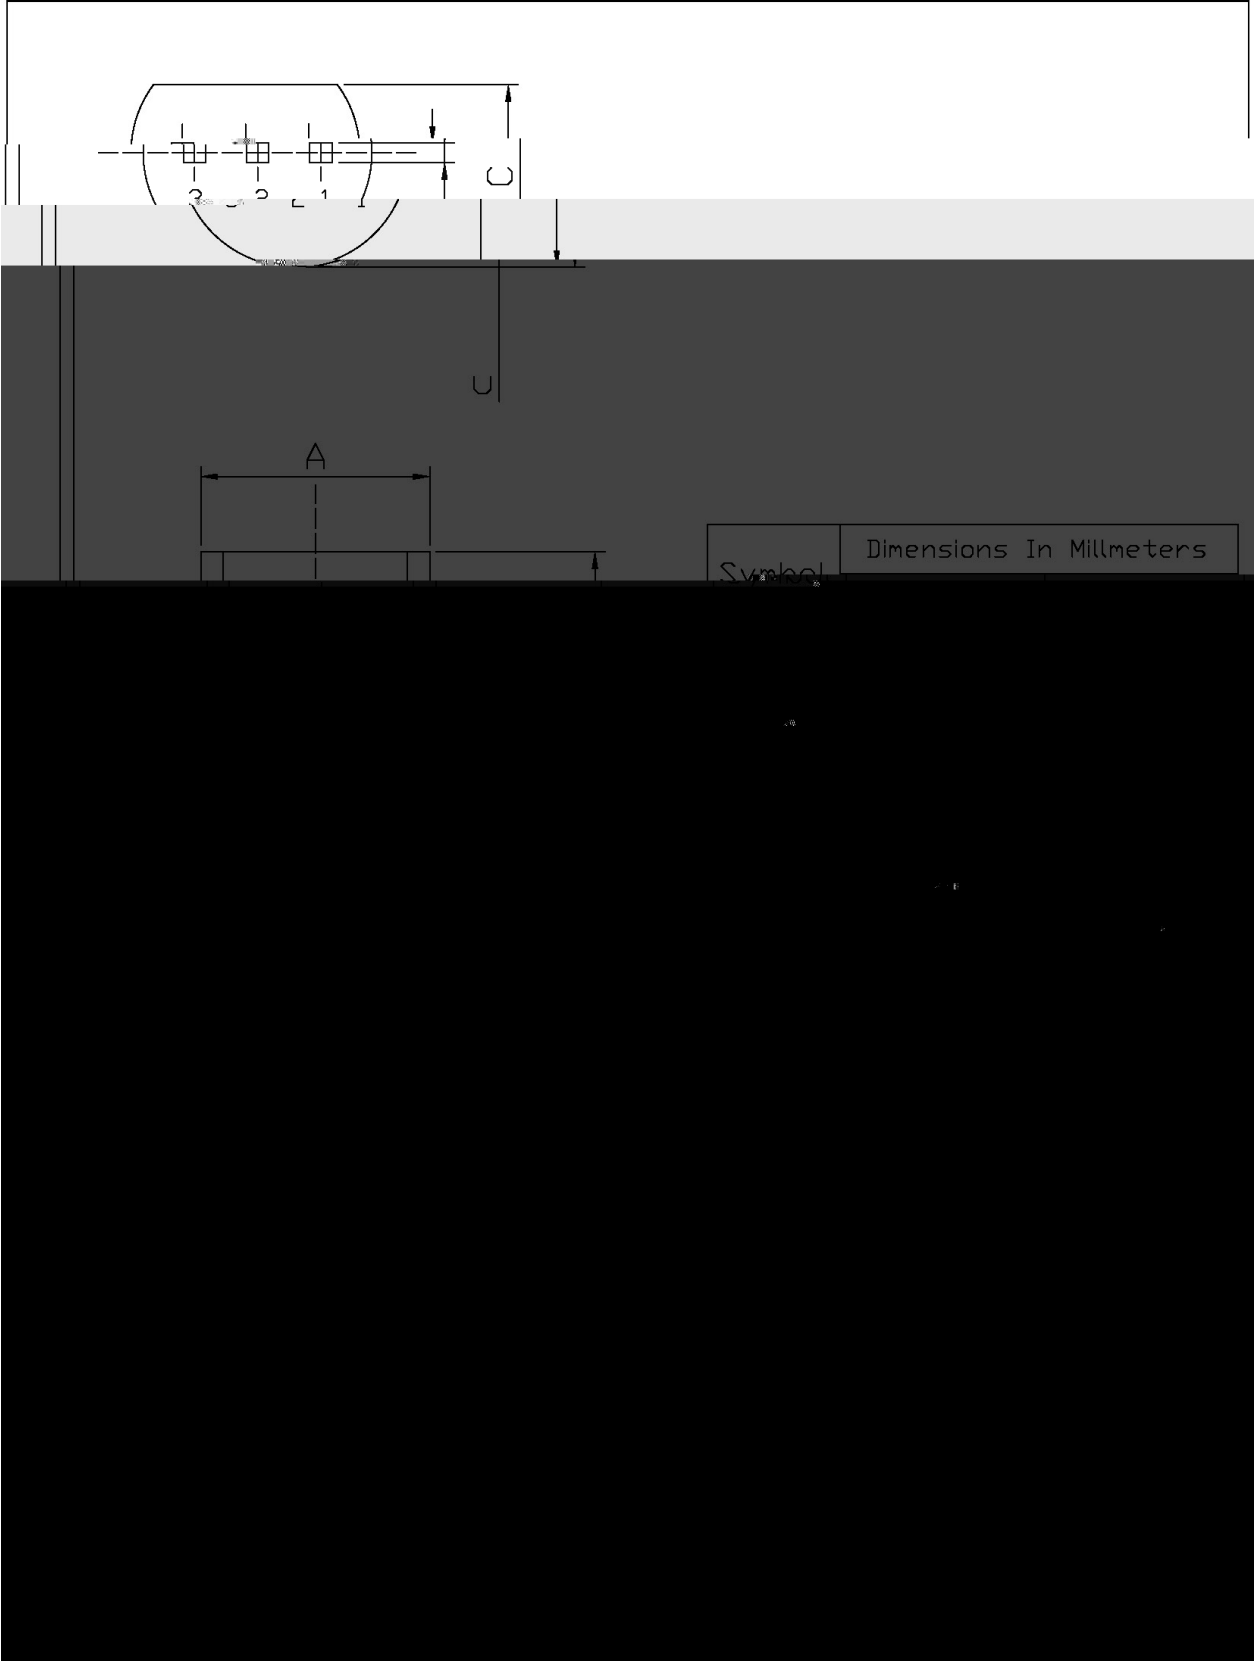

/ Marking Instructions

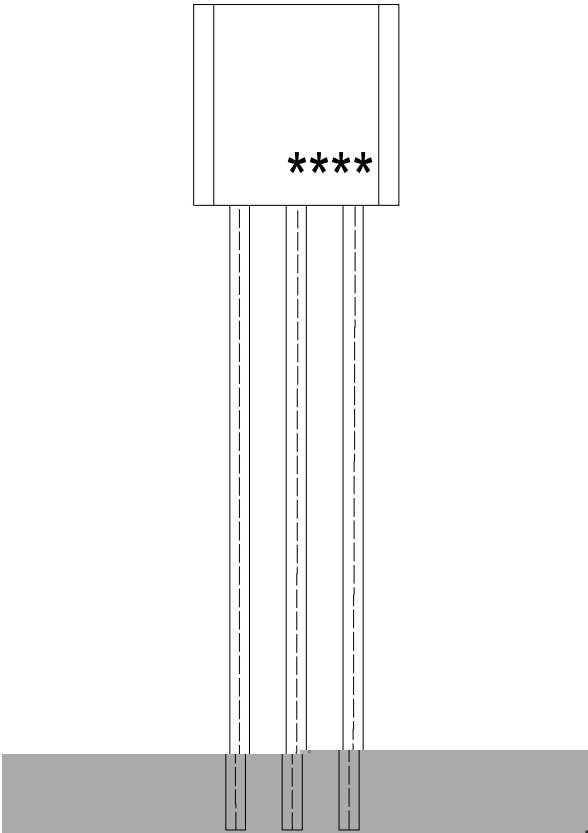

() / Temperature Profile for Dip Soldering(Pb-Free)

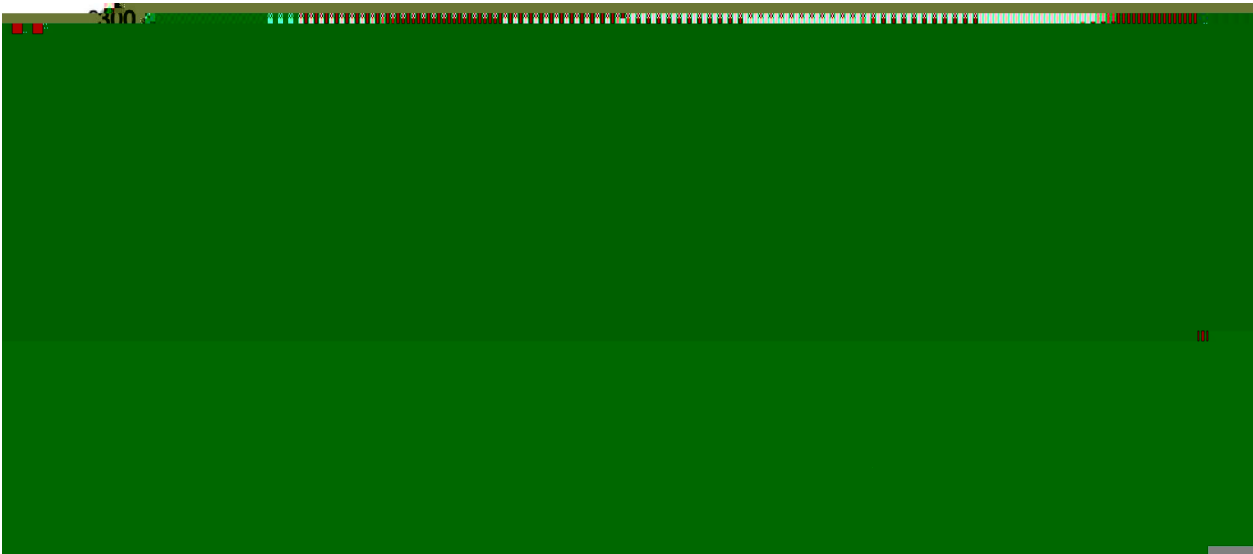

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Unit / Bag 只/袋	Bag / Inner Box 袋/盒	Unit / Inner Box 只/盒	Inner Box / Outer Box 盒/箱	Unit / Outer Box 只/箱	Unit Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

封装形式	包装数量					包装尺寸	
	Unit / Tape 只/纸带	Tape / Inner Box 纸带/盒	Roll / Inner Box 纸带层/盒	Inner Box / Outer Box 盒/箱	Unit / Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92	3,000	1	120	10	30,000	328×230×42	小箱 480×346×235, 大箱 547×407×268

/ Notices