


/ Descriptions

WR0459I QSQ

/ Features**/ Applications**

1


/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

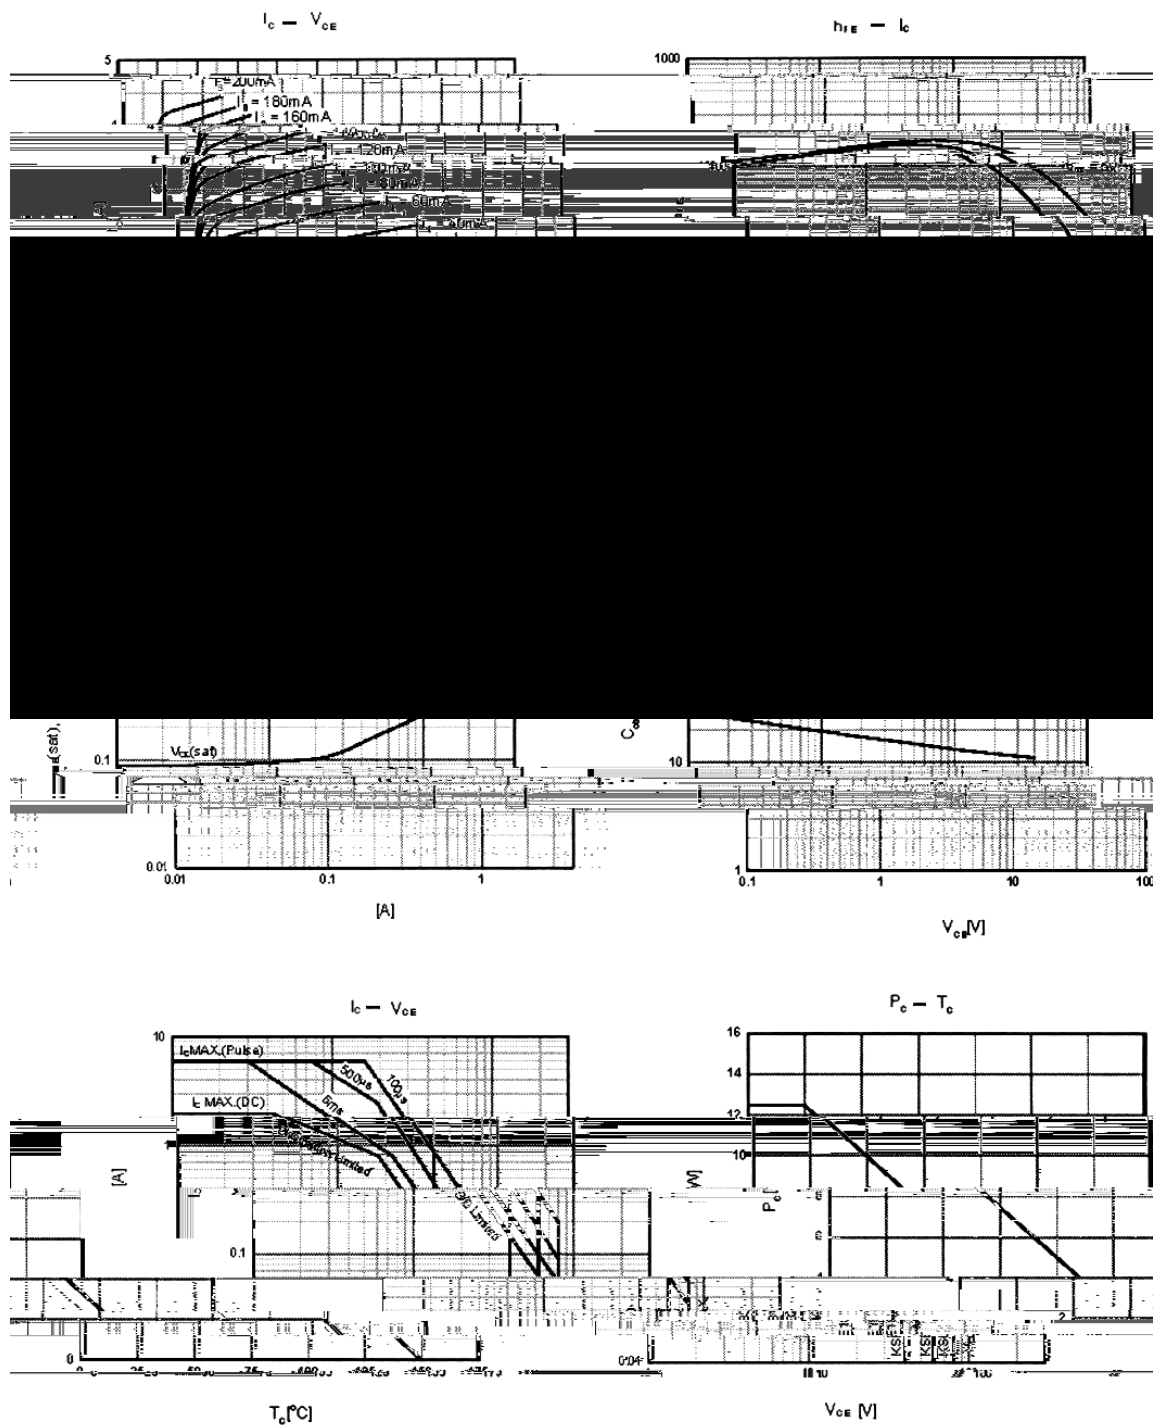

/ Package Dimensions


TU-126T

单位: mm

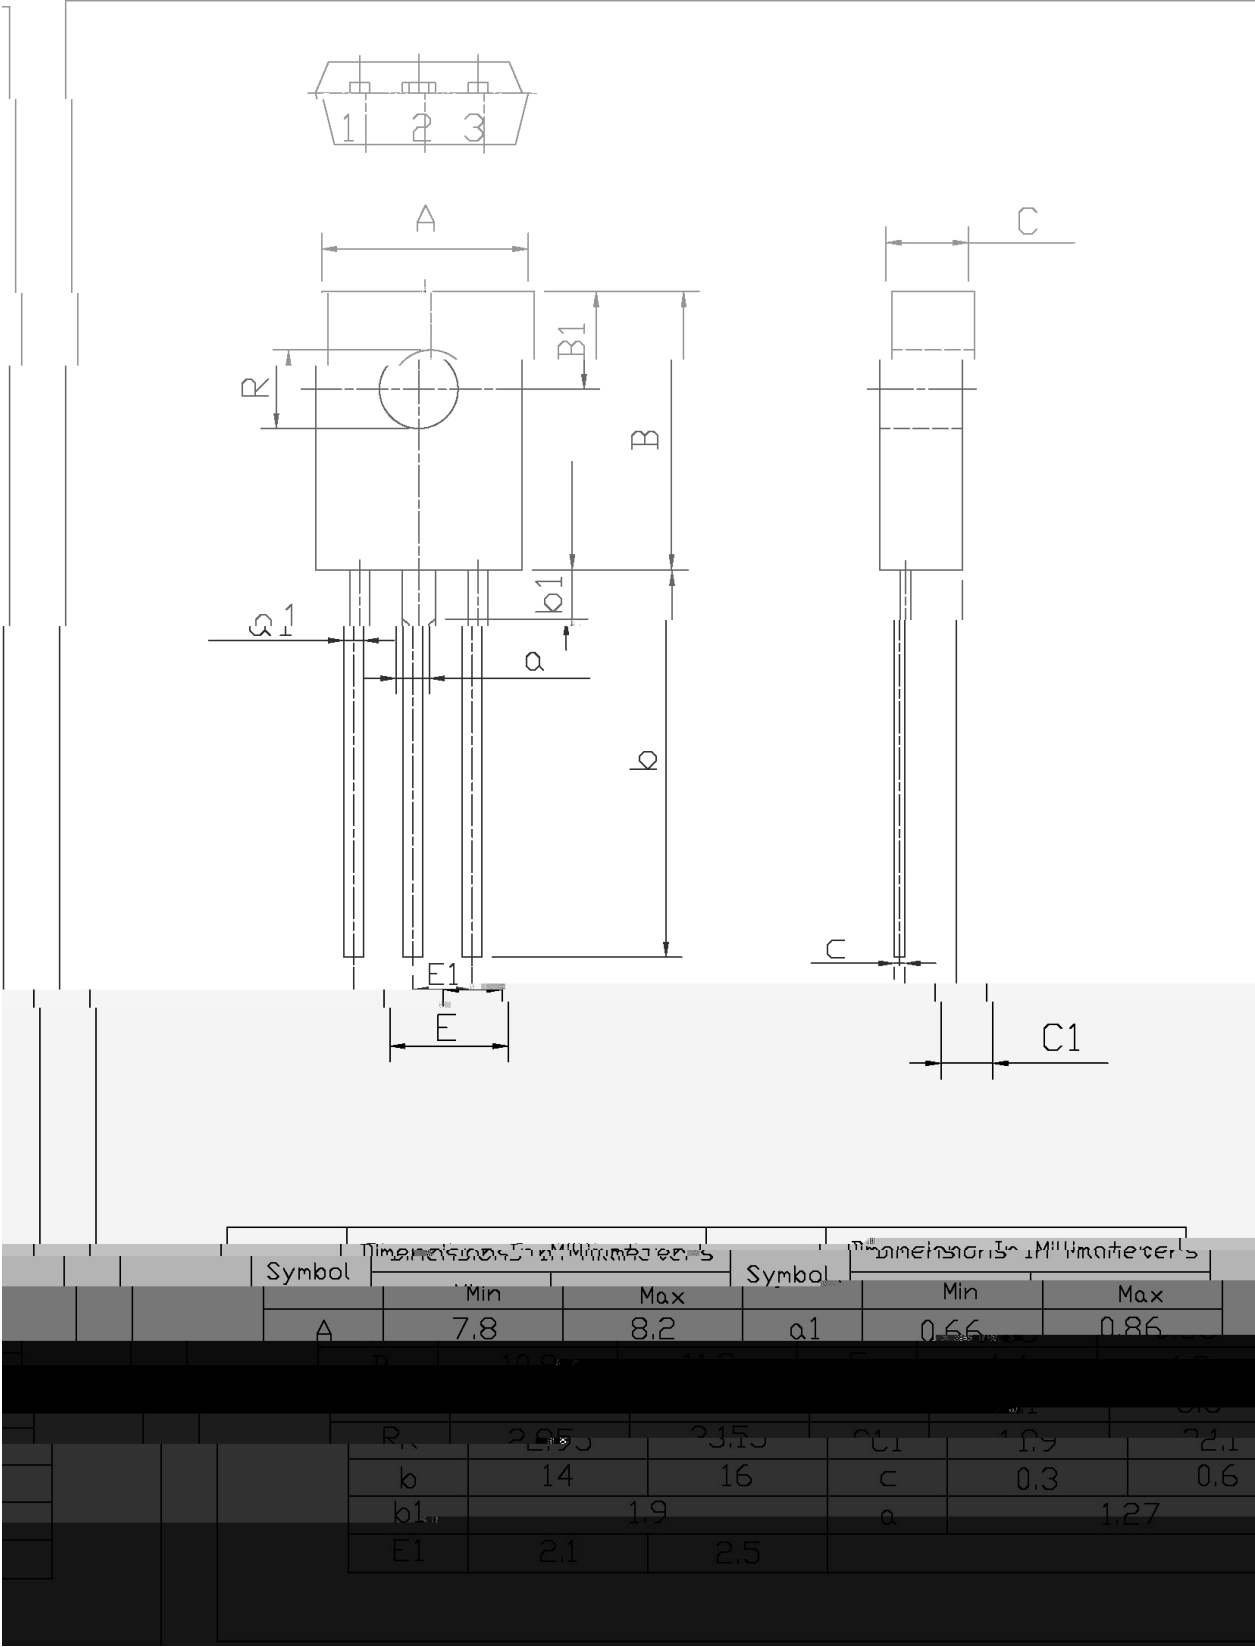

KSE180

() / Temperature Profile for Dip Soldering(Pb-Free)

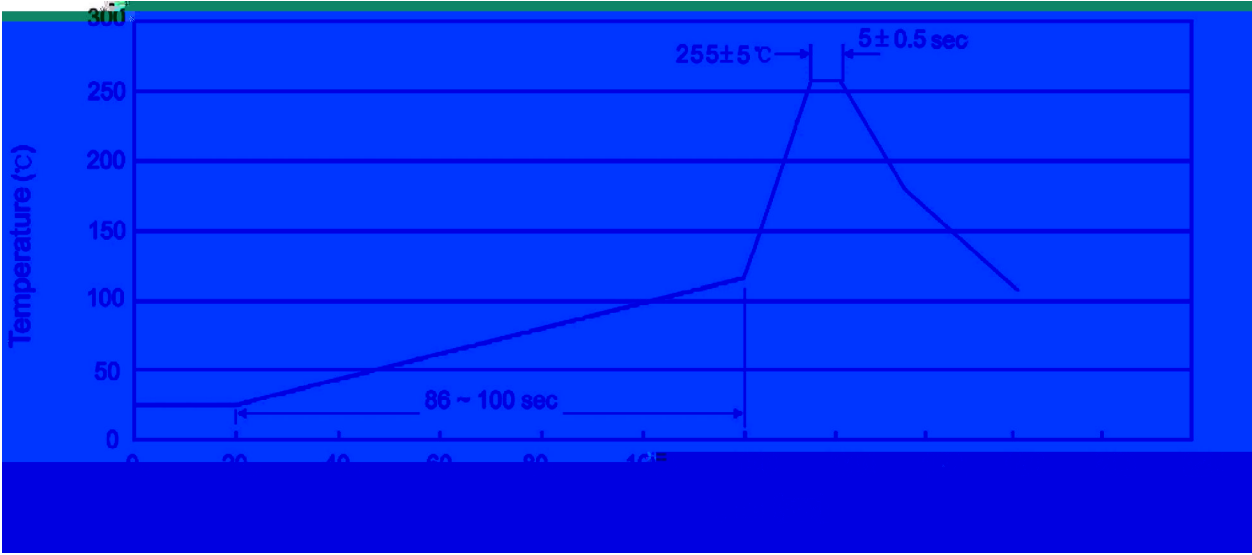

3/8 3/8 2 3/8 2 3/8 2 3/8

/ Resistance to Soldering Heat Test Conditions

2 3/8 2

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-126/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180

/ Notices