

/ Descriptions


WR0553I SQS

/ Features

NWG538;

/ Applications

/ Equivalent Circuit






/ Pinning




/ h_{FE} Classifications & Marking


/ Electrical Characteristic Curve

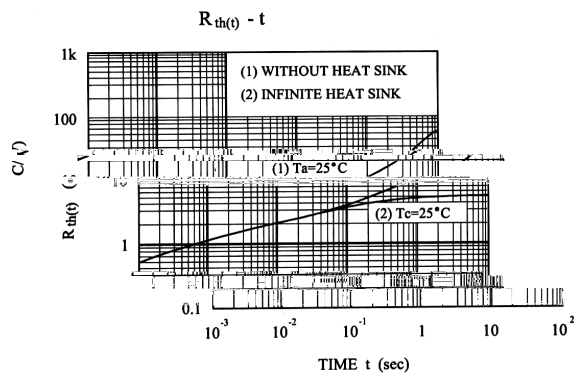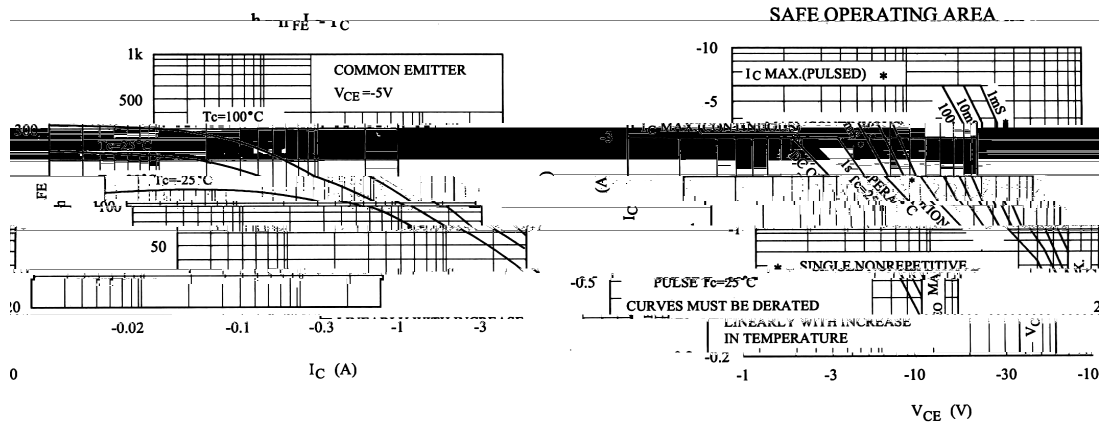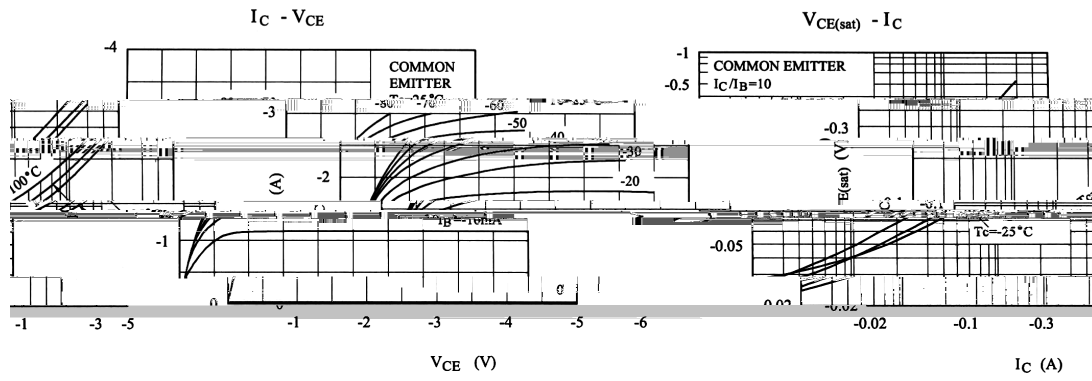


/ Package Dimensions

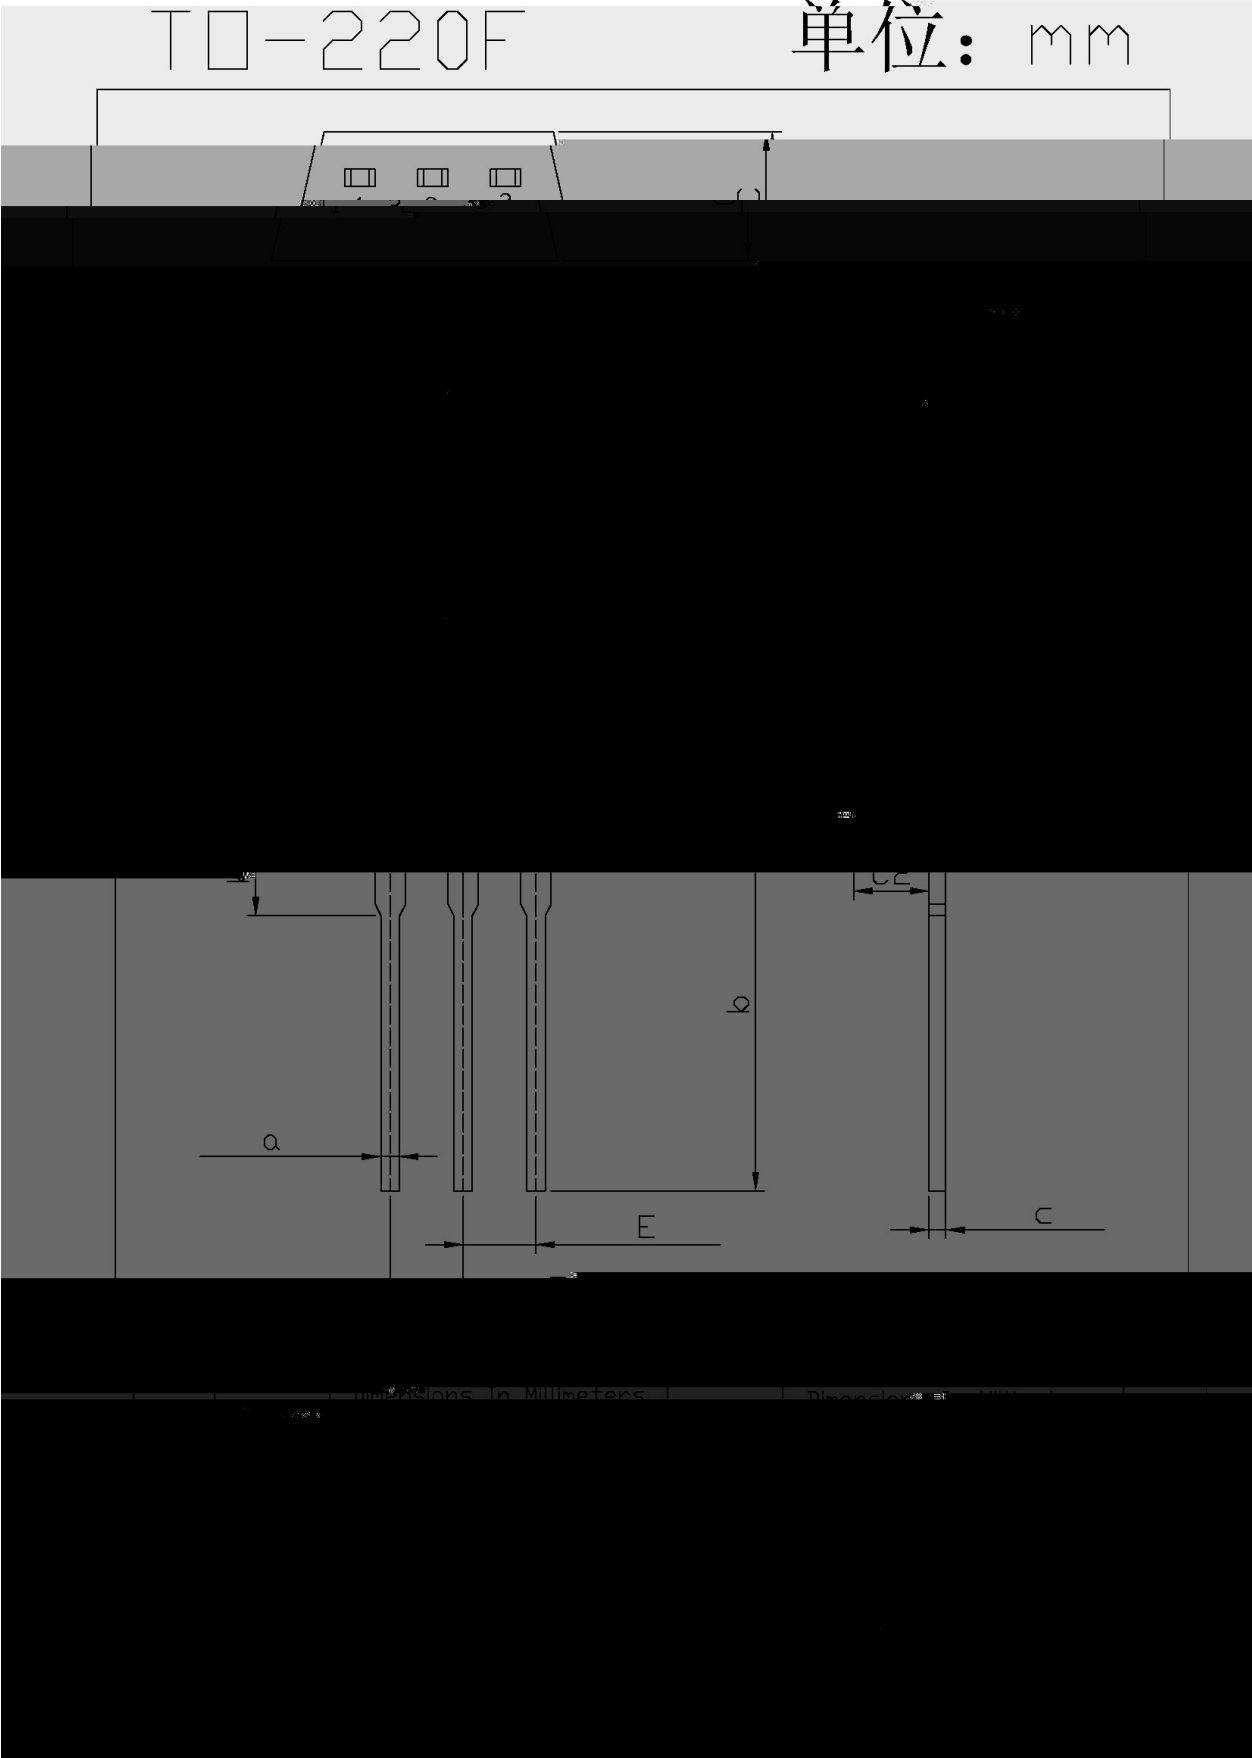

/ Marking Instructions

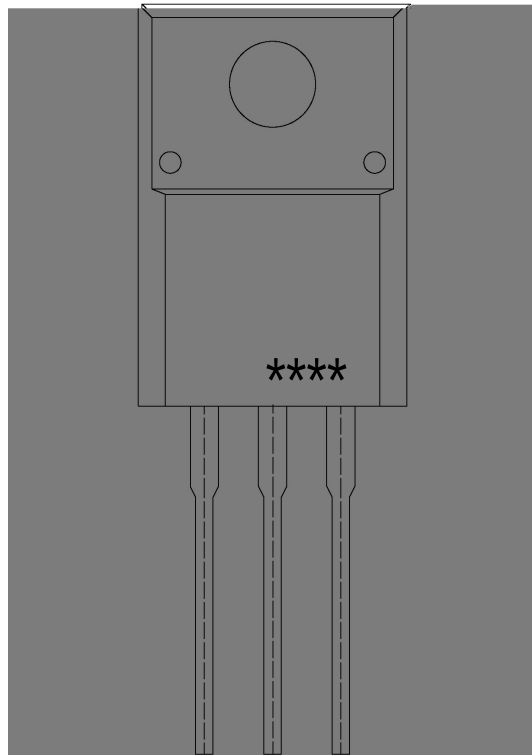

() / Temperature Profile for Dip Soldering(Pb-Free)

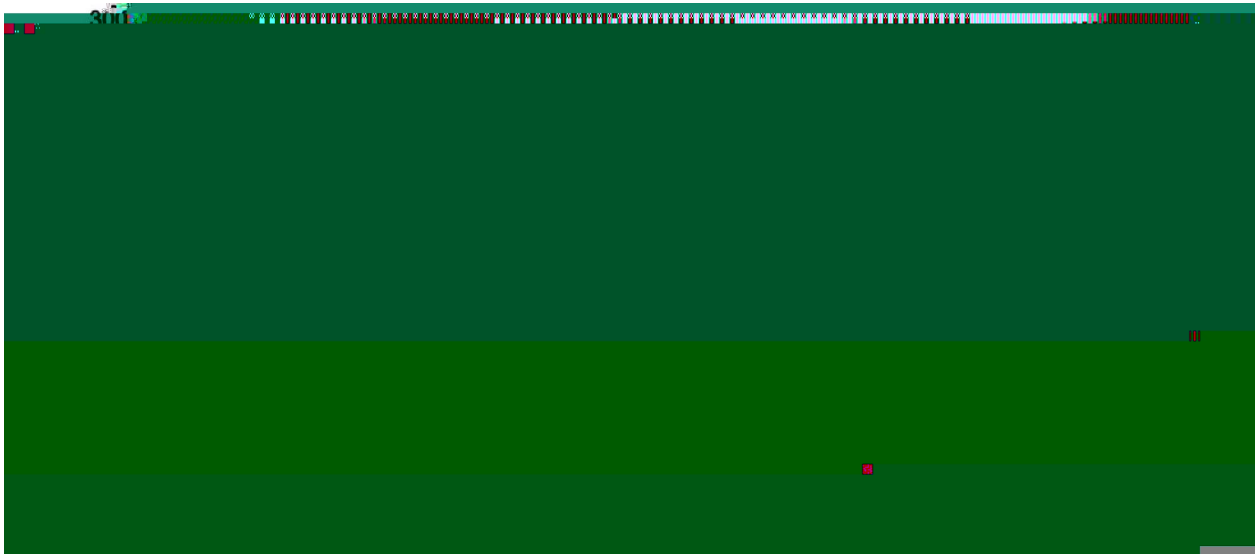

$\frac{3}{8}$

$2 \frac{3}{8}$

$\frac{3}{8}$

$\frac{3}{8}$

$2 \frac{3}{8}$

$\frac{3}{8}$

$\frac{3}{8}$

$2 \frac{3}{8}$

$\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

$2 \frac{3}{8}$

2

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices