

/ Descriptions


TO-92LM NPN

/ Features

KTA1273

/ Applications

/ Equivalent Circuit



/ Pinning









/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

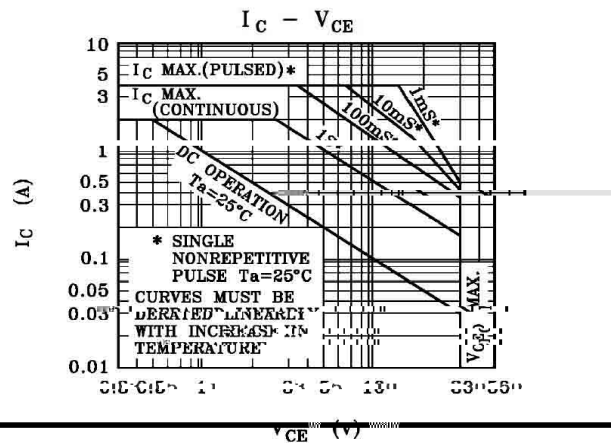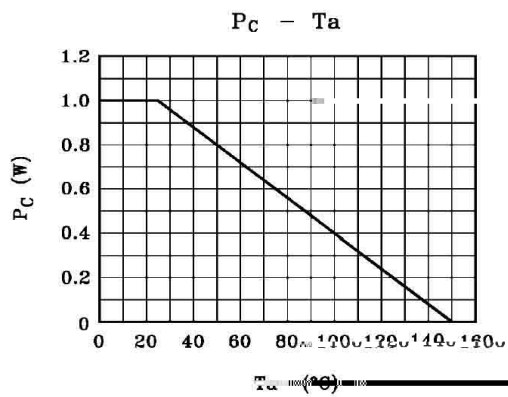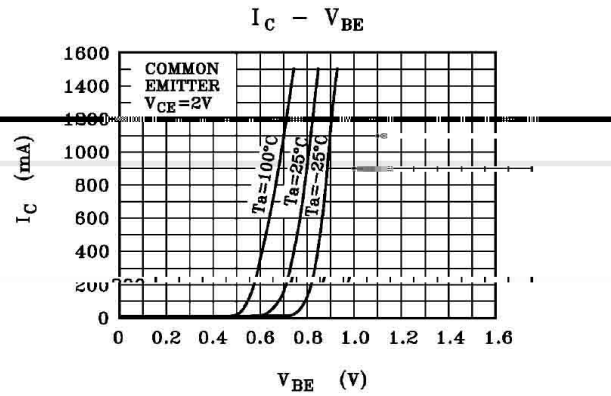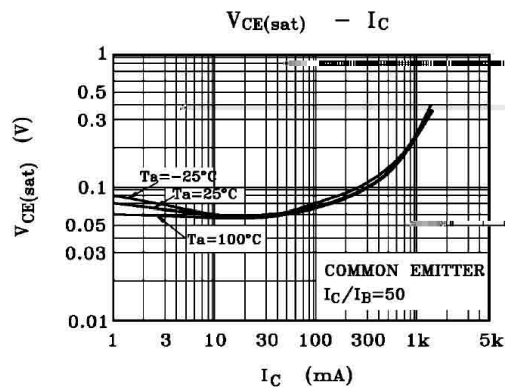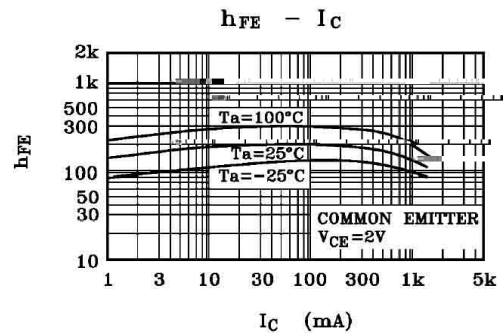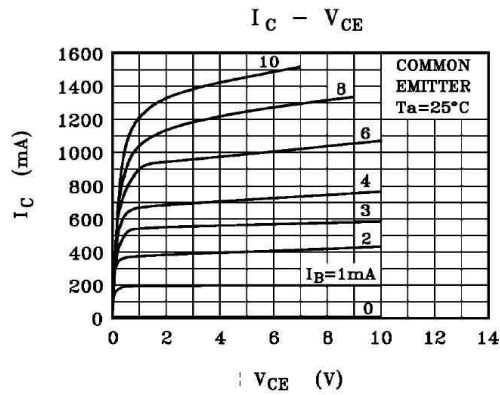


/ Package Dimensions

T0-92LM

Unit: mm

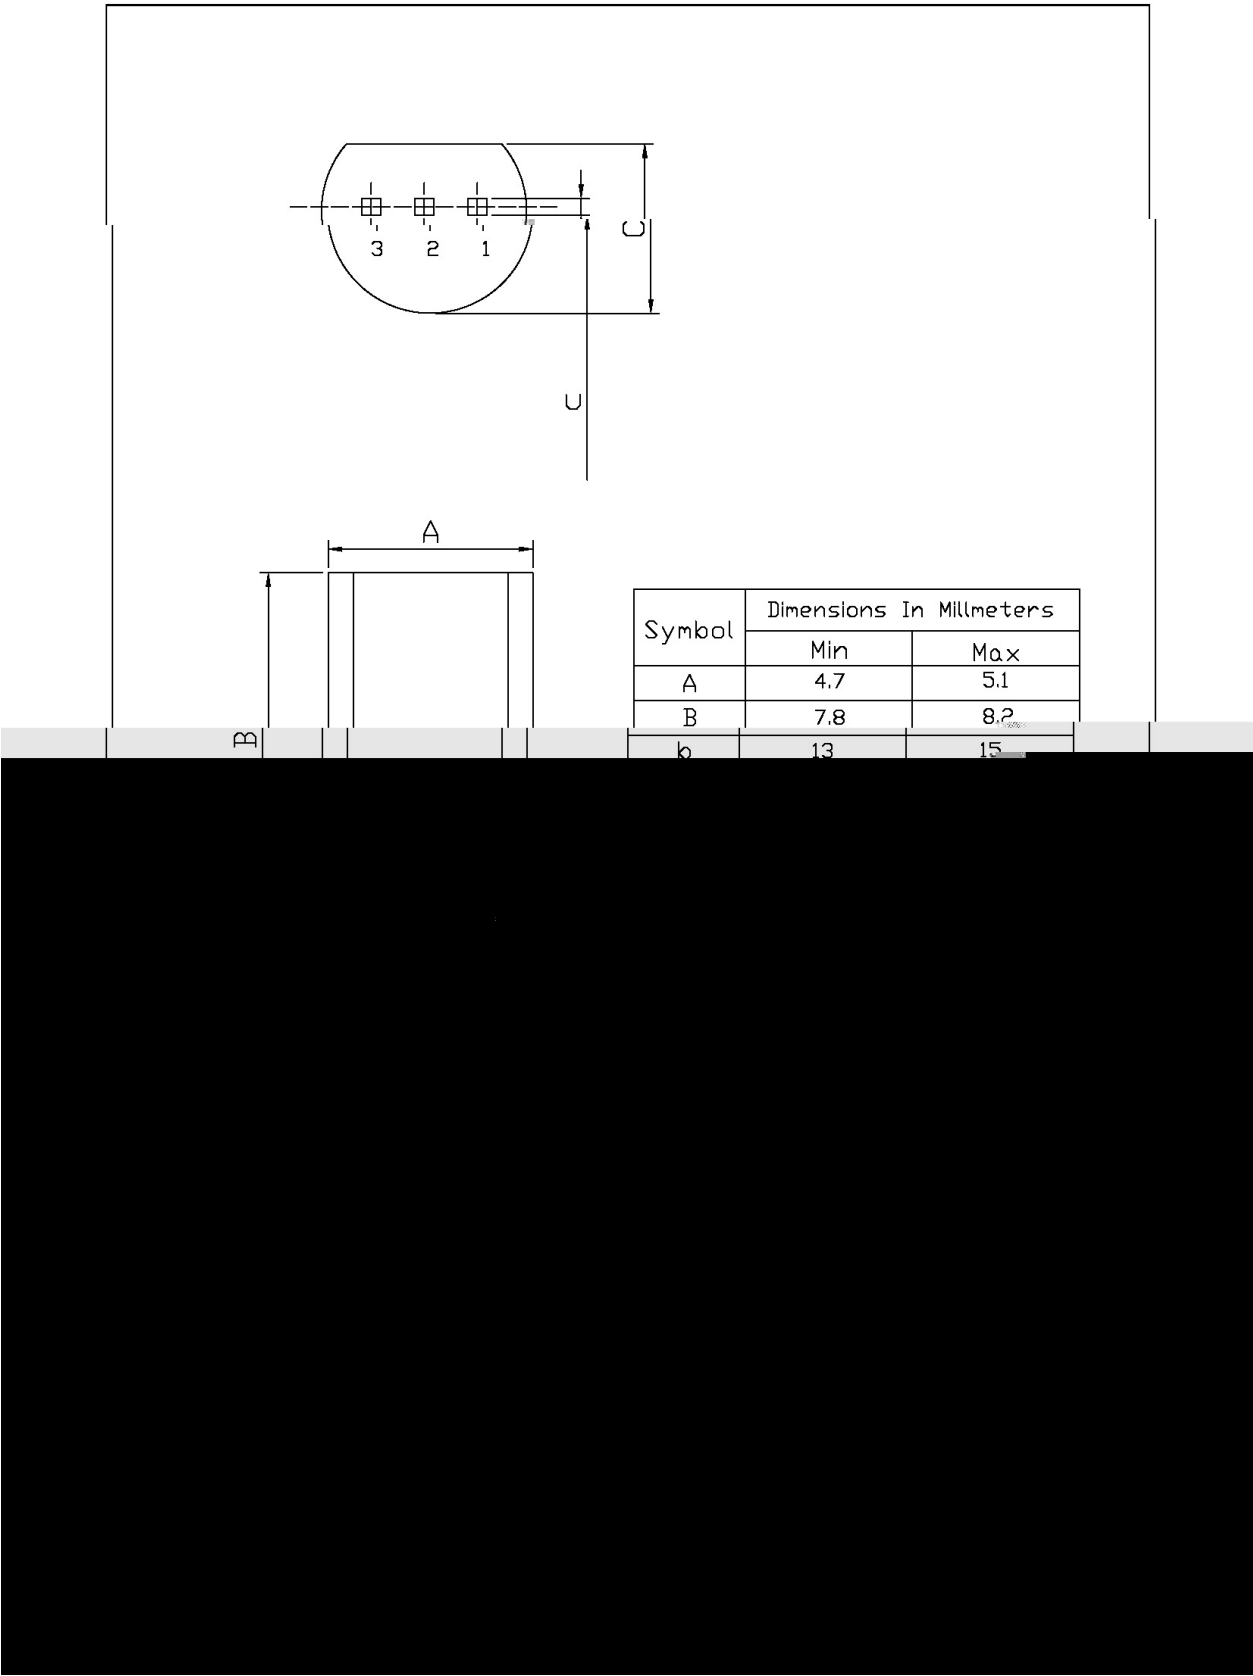


/ Marking Instructions

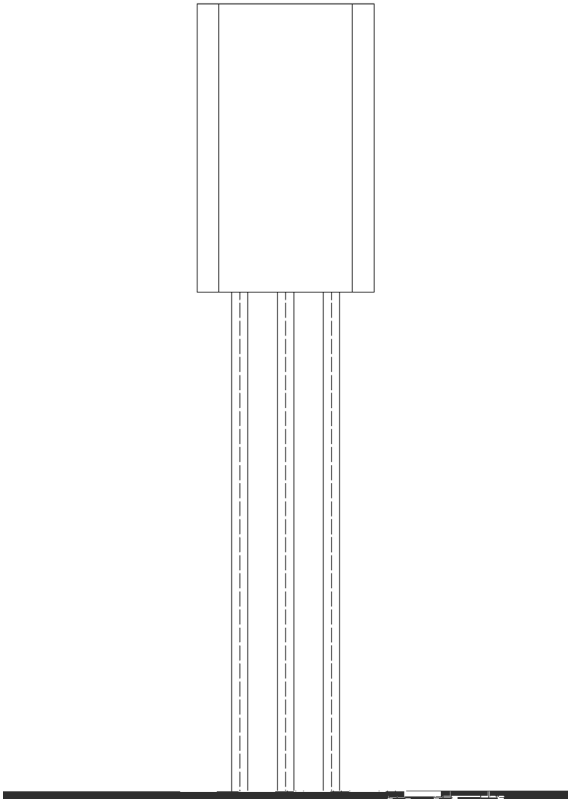

BR:
C3205
O: h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

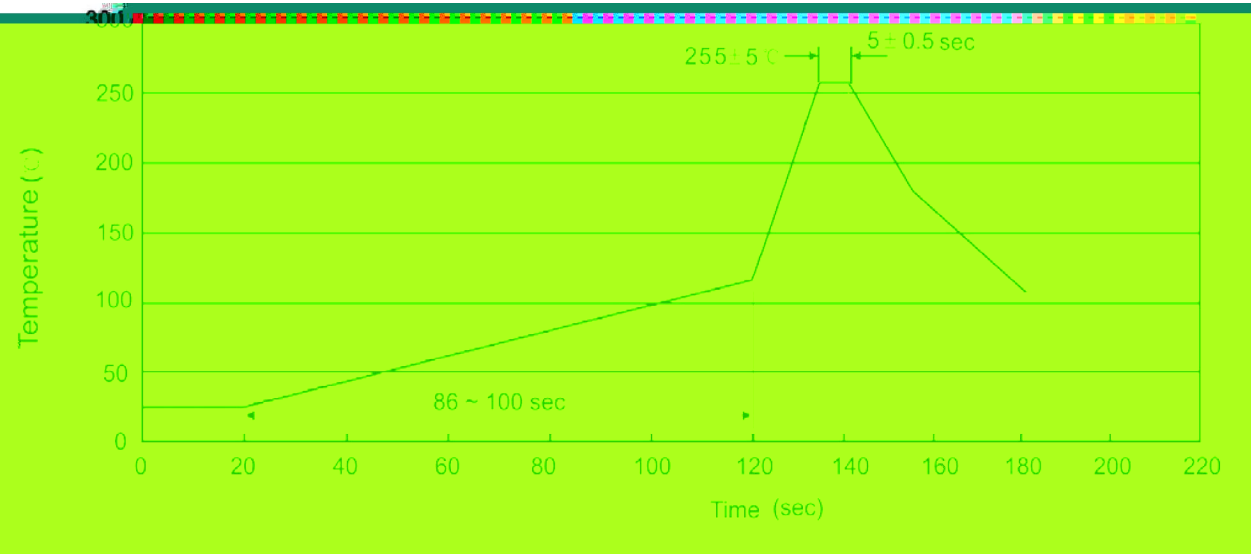

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒		