


/ Descriptions



/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

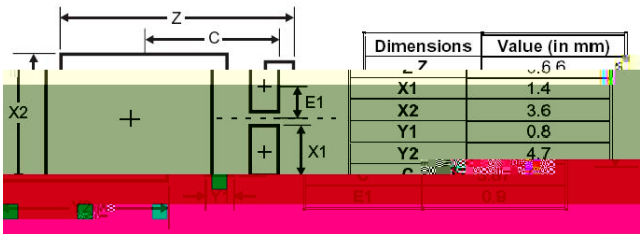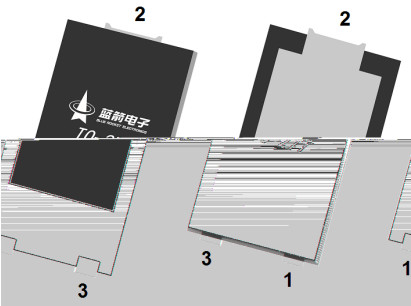

/ Marking

/ Absolute Maximum Ratings(Ta=25)

			℃
			℃
	θ		℃
	θ		

/ Electrical Characteristics(Ta=25)

		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				




- /
1.

PCB 2


18.8mm x 14.4mm

5.6mm x 14.4mm
2.
- /


/ Electrical Characteristic Curve

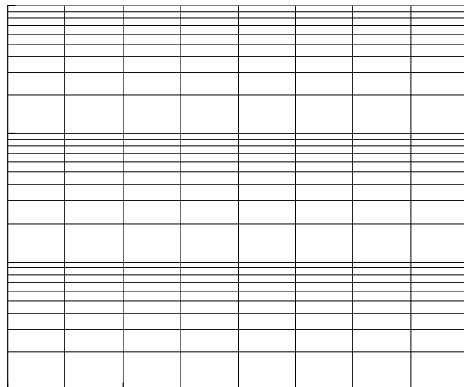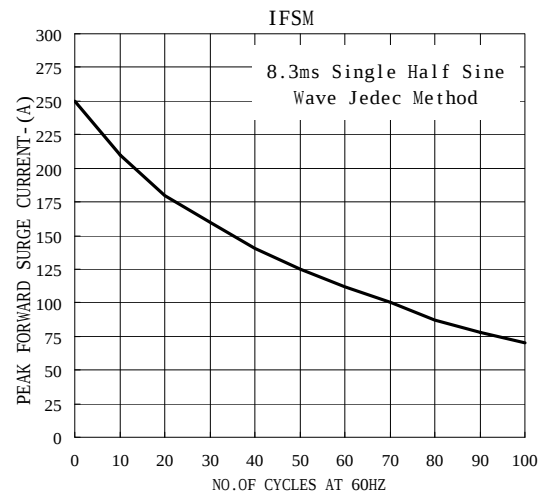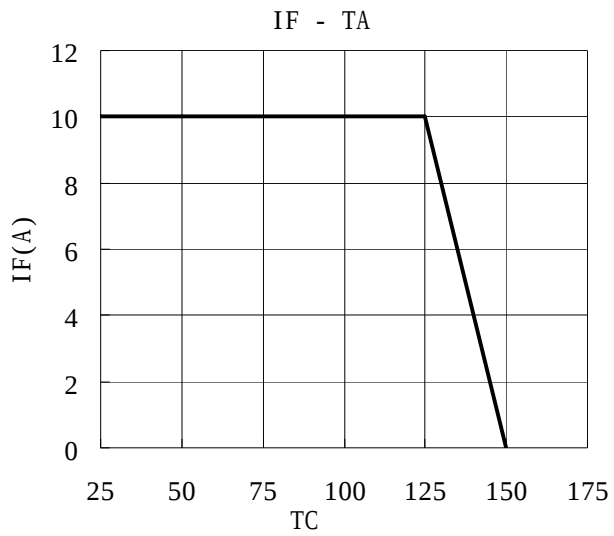

/ Package Dimensions

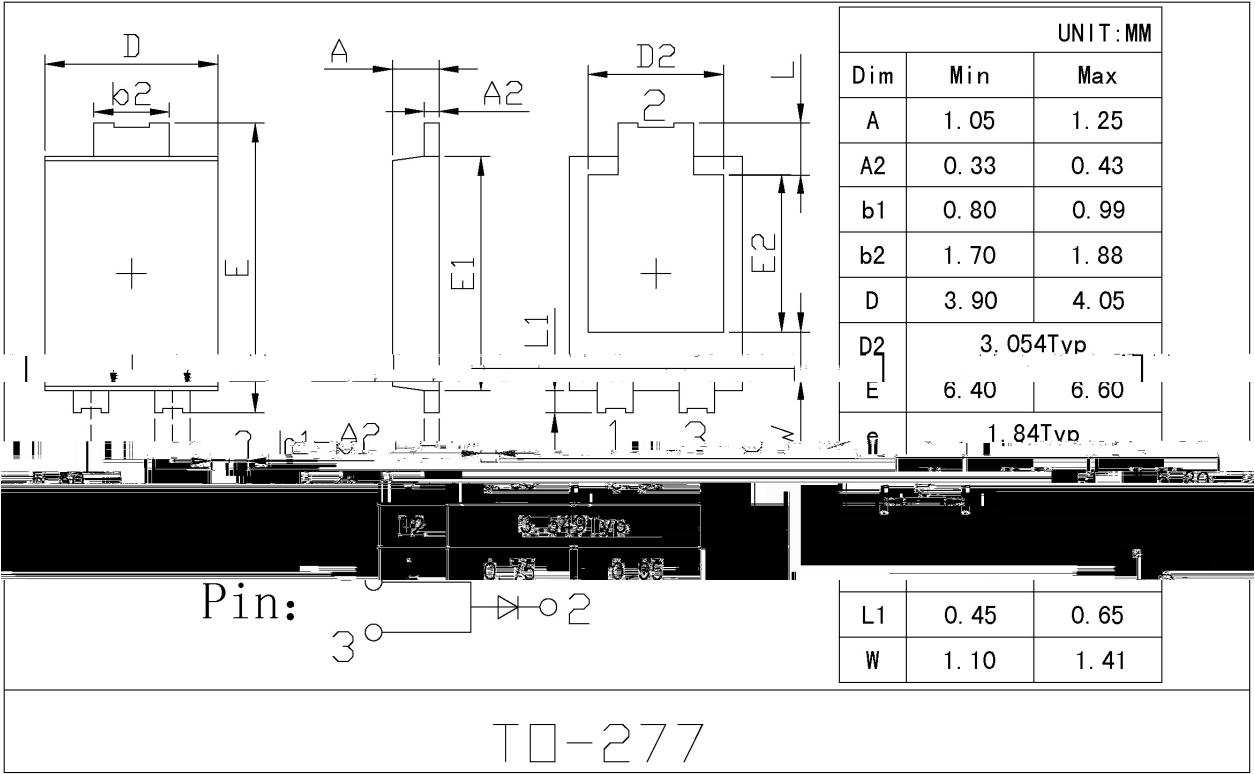


/ Marking Instructions

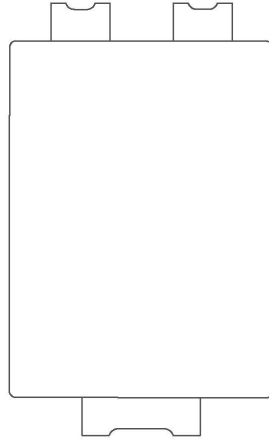

10S45

10S45

() /

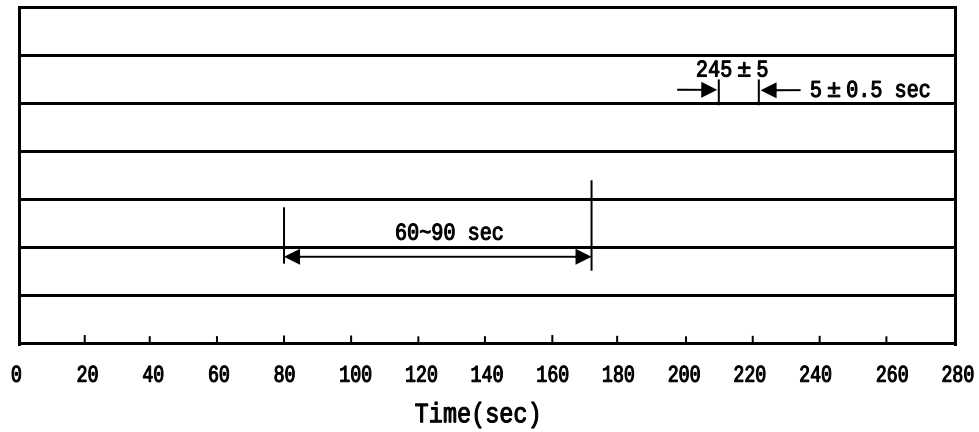 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

/ Notices