

/ Descriptions

TO-3P


/ Features

/ Applications


OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning








/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

- /
- 1.
- 2.


/ Electrical Characteristic Curve

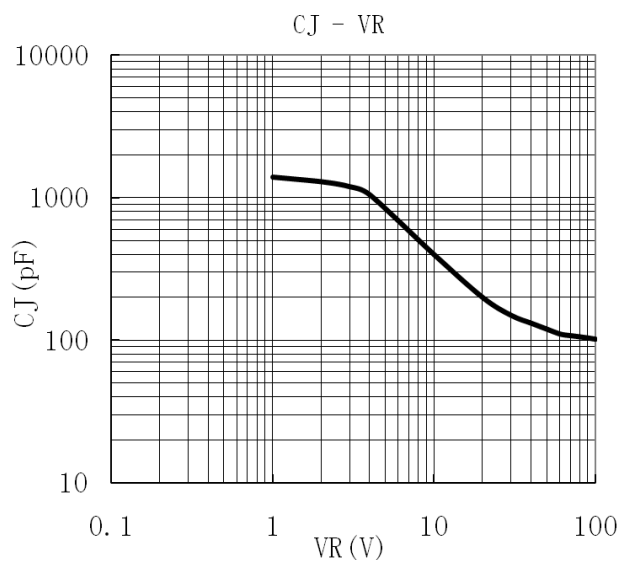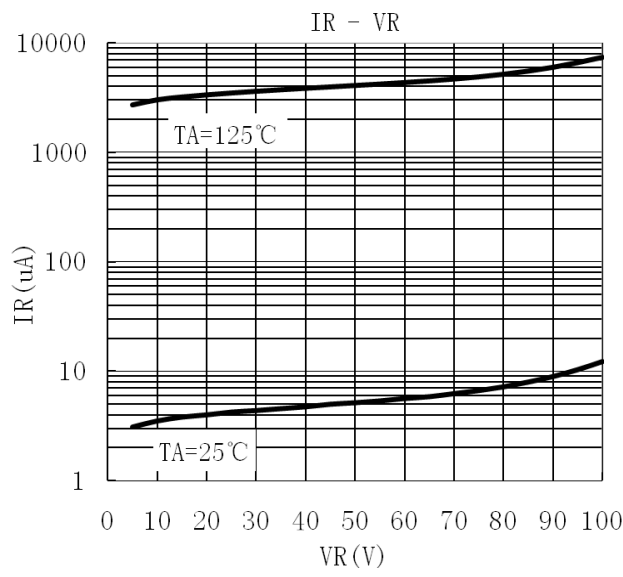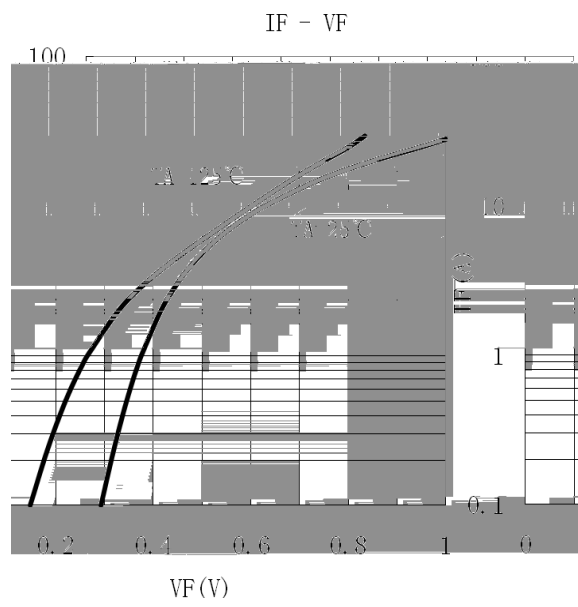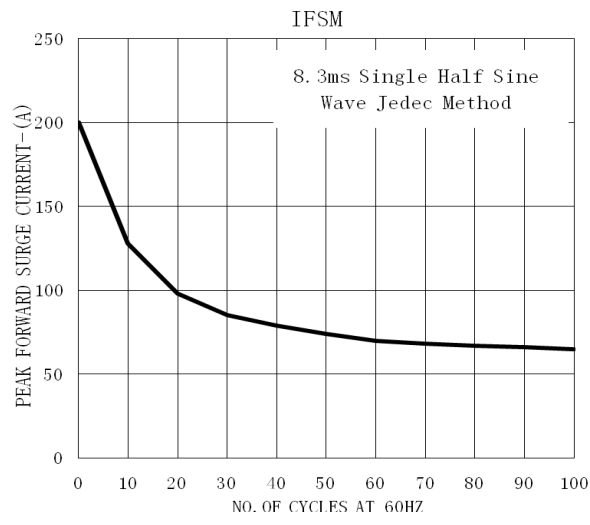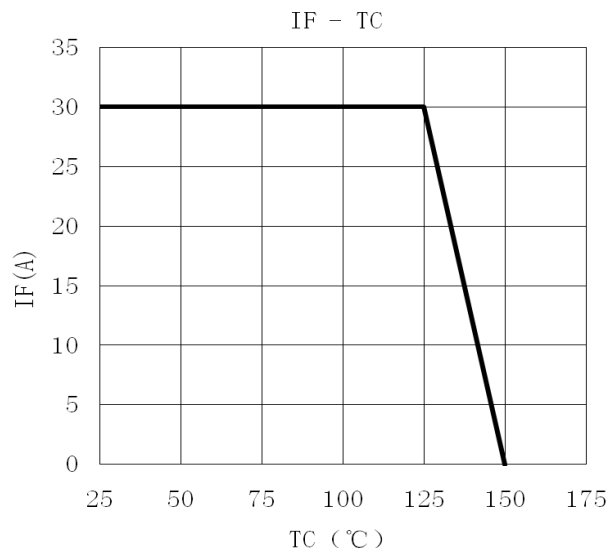

/ Package Dimensions

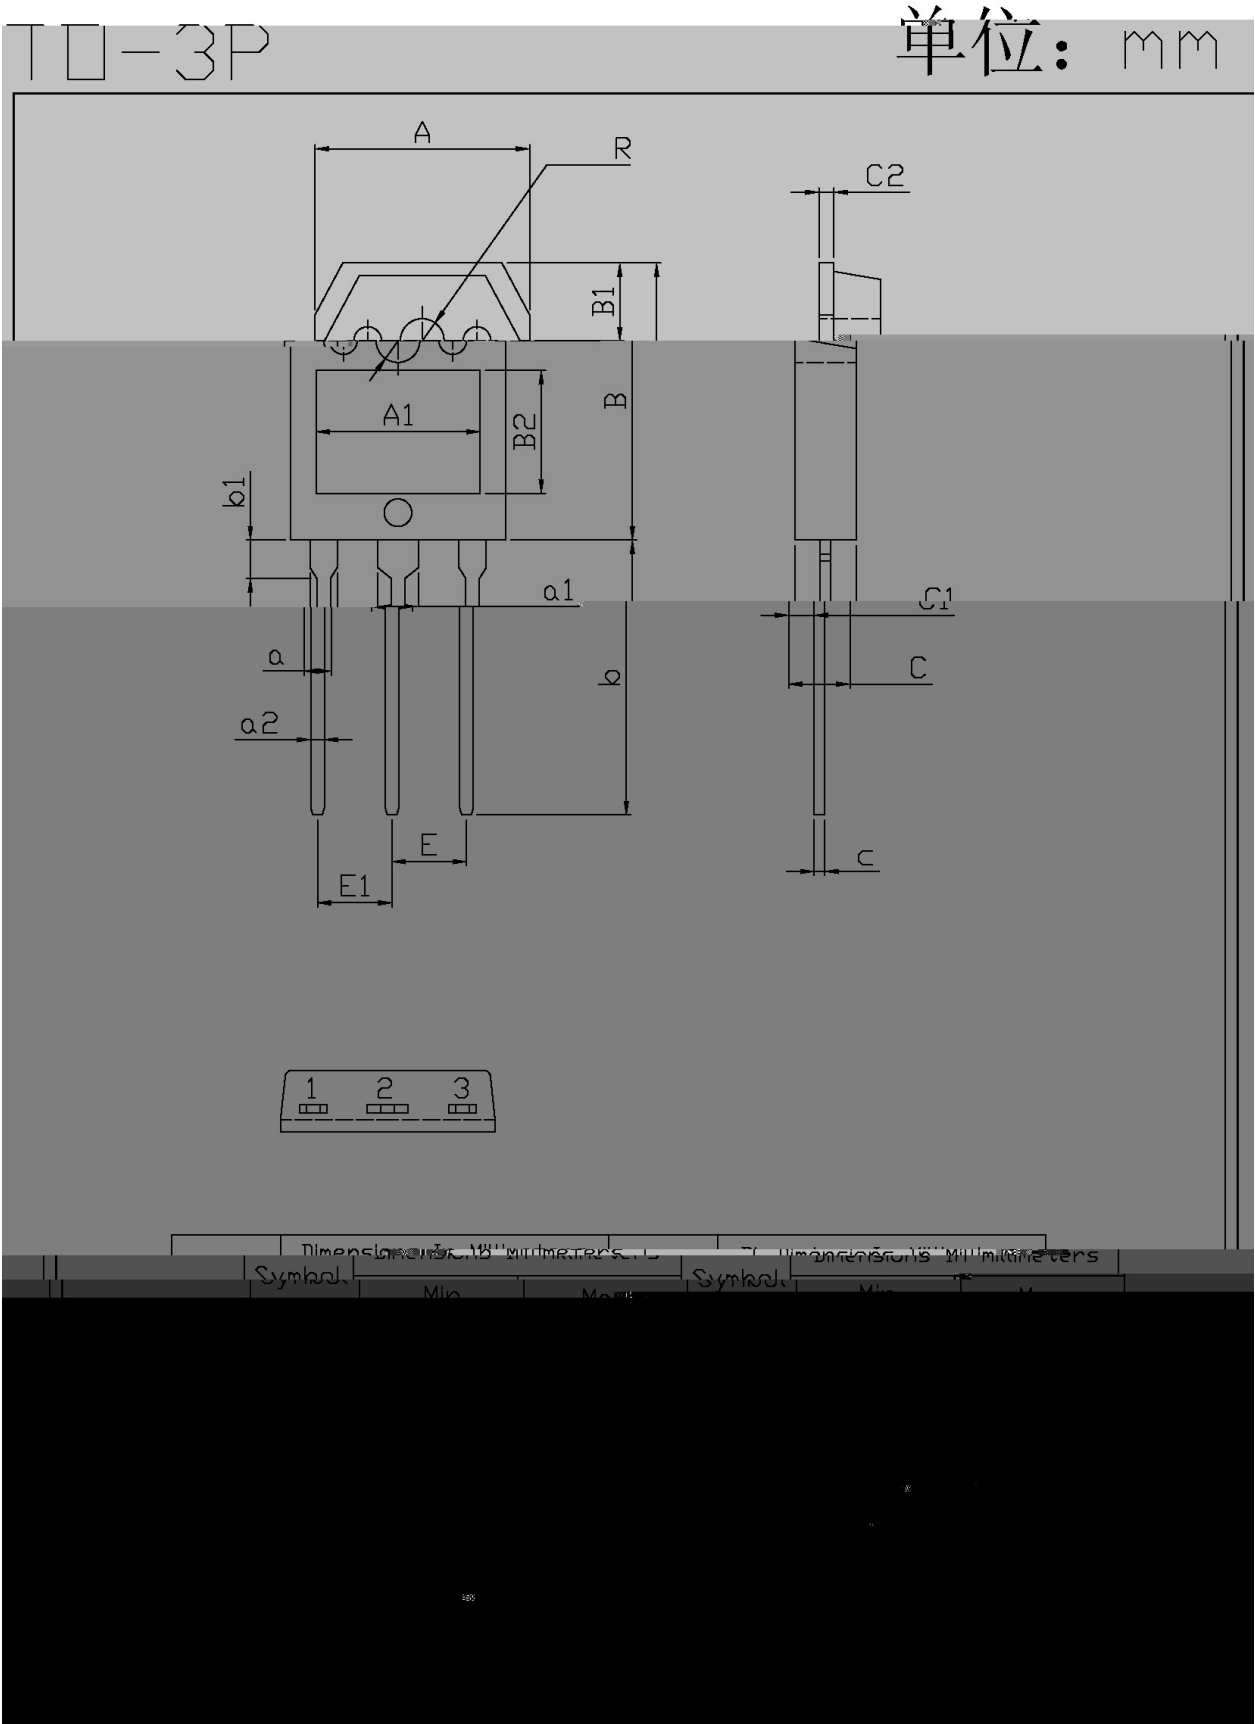


/ Marking Instructions

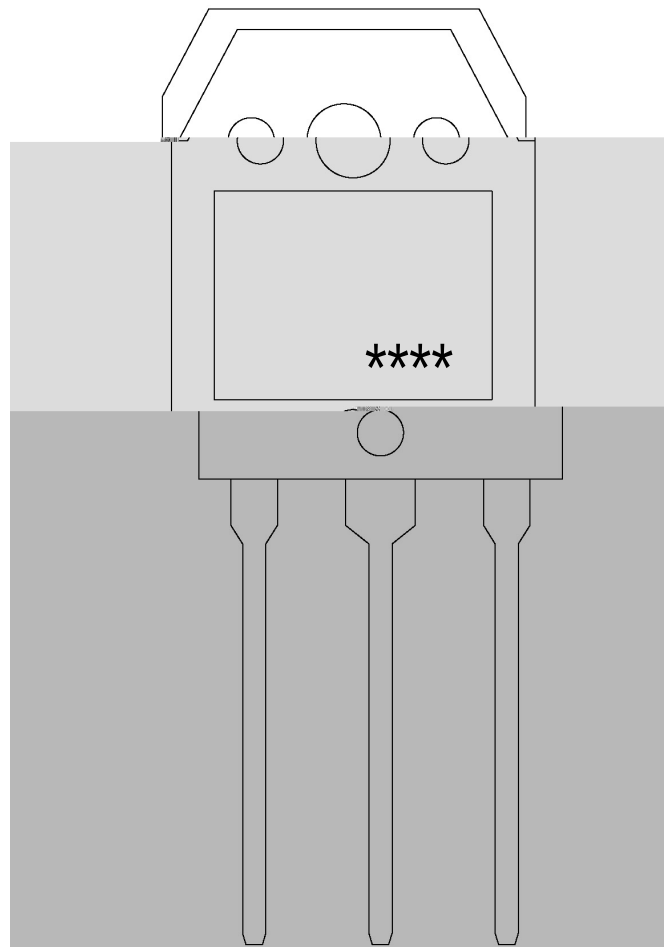

BR

LV30100PT

() / Temperature Profile for Dip Soldering(Pb-Free)

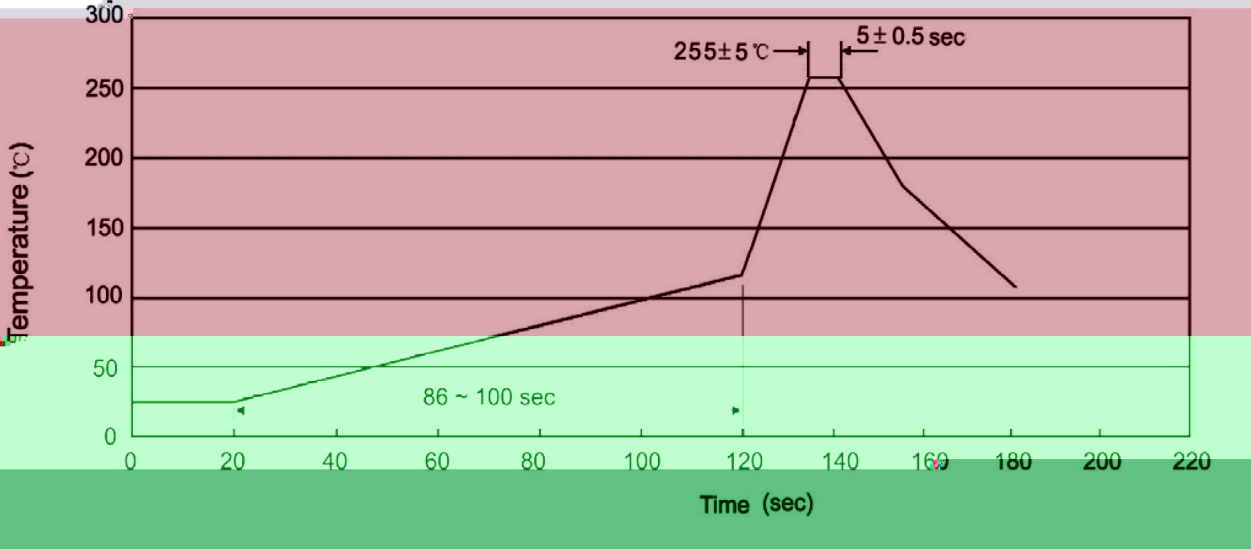

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

/ Notices