

/ Descriptions


TO-252

/ Features


$V_F(\text{typ})=0.26\text{V}$

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

			℃
			℃
	θ		℃


/ Electrical Characteristics(Ta=25)

		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				






1. FR-4 PCB 2

2.


/

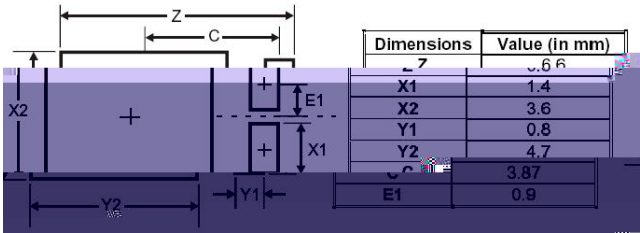


/ Electrical Characteristic Curve

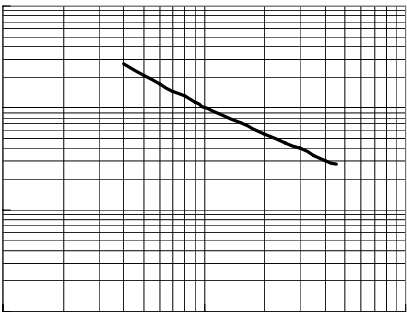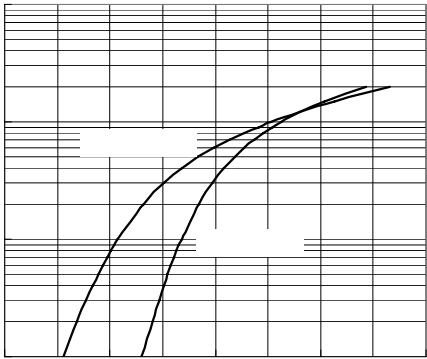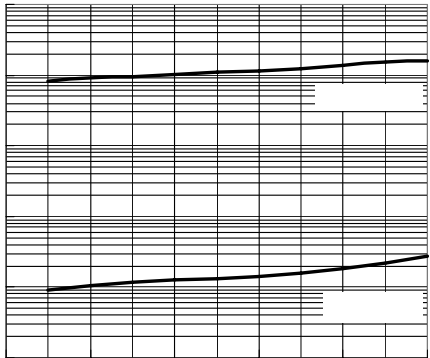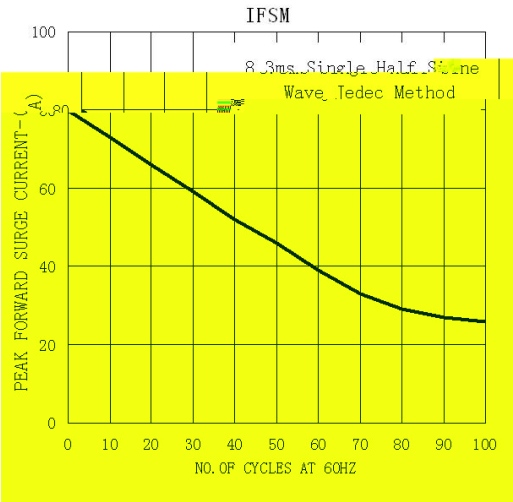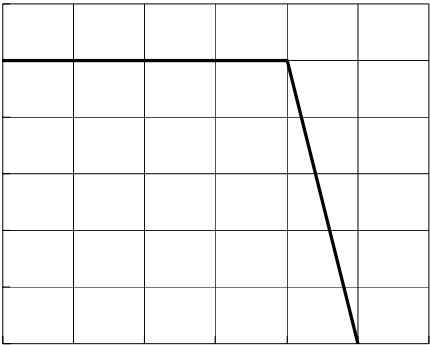

/ Package Dimensions

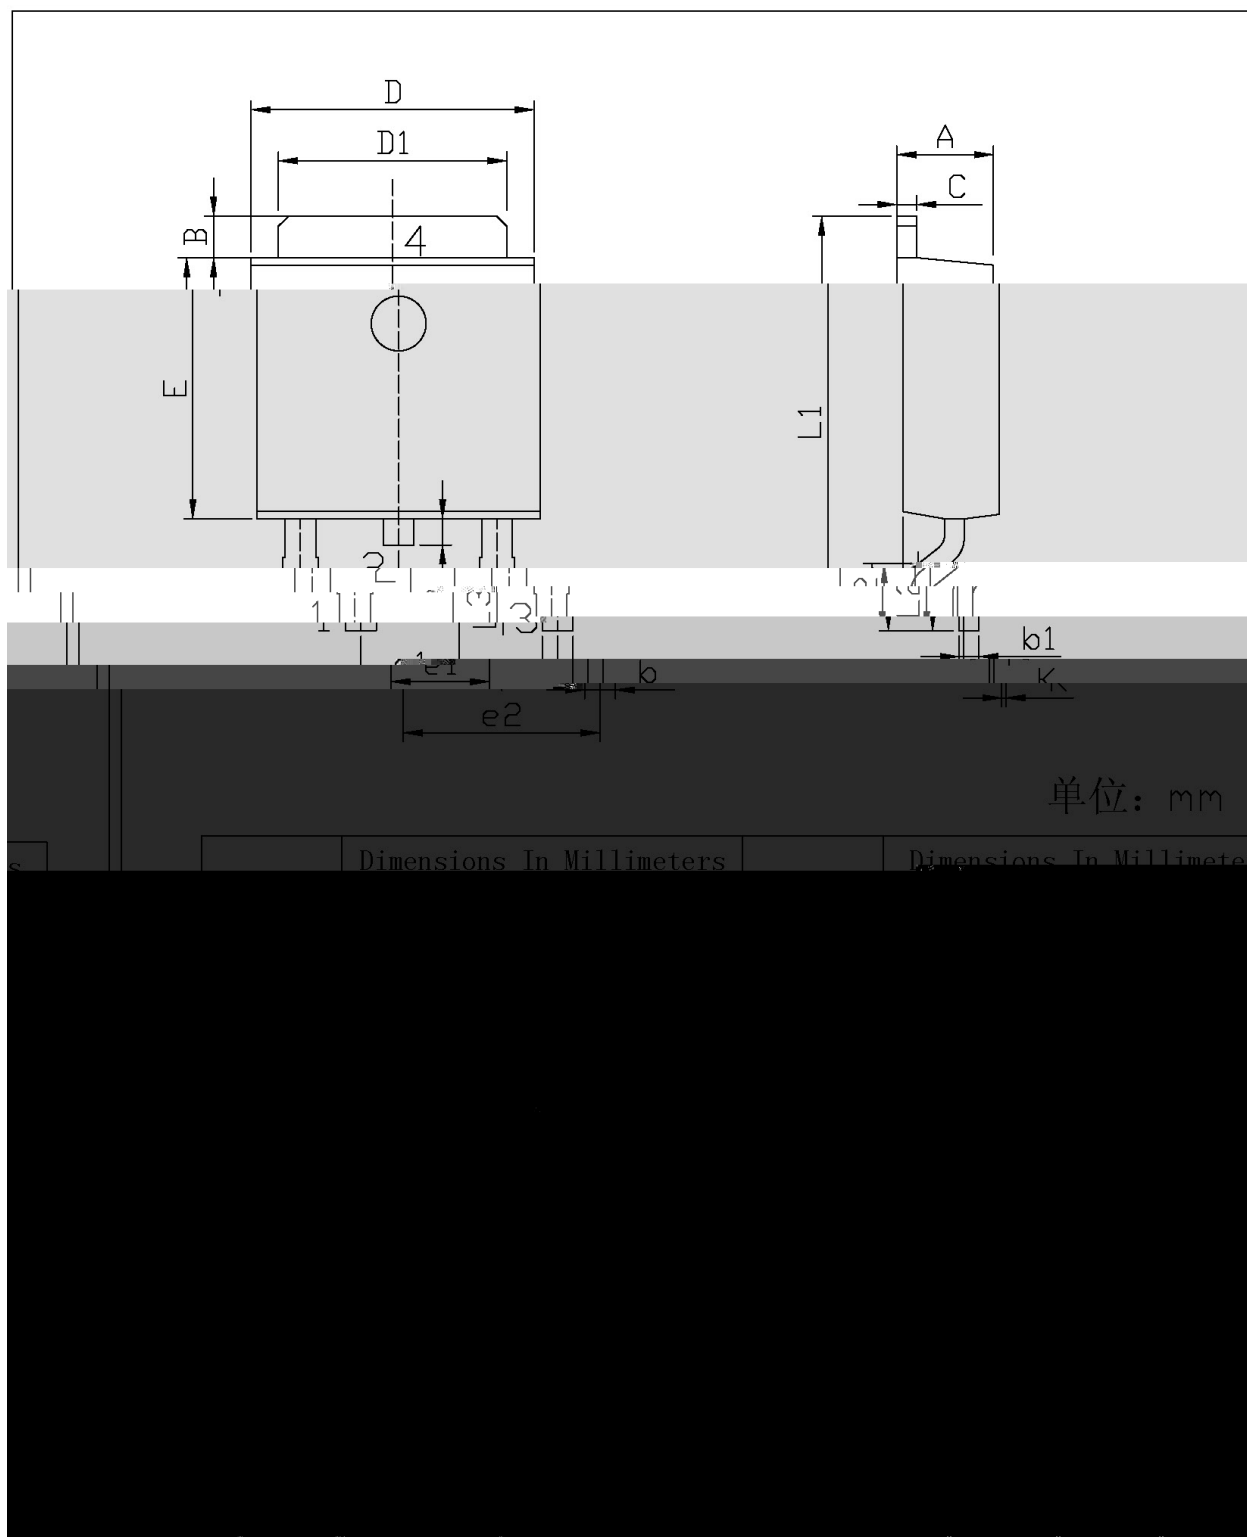


/ Marking Instructions

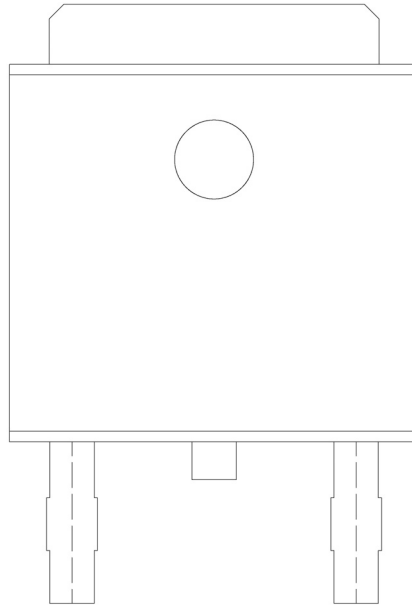

BR

LV5S45

() /

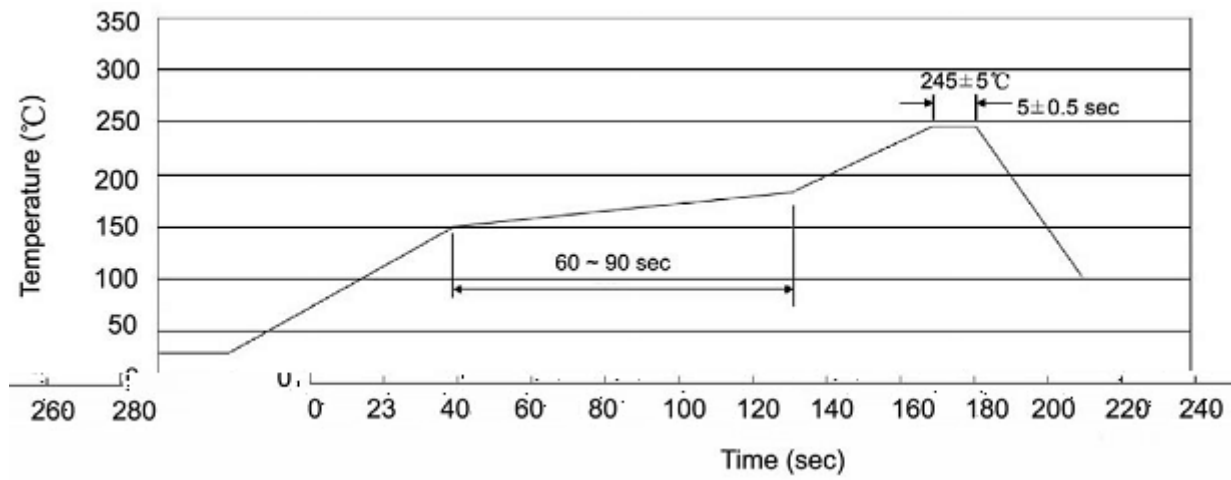

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices