

/ Revised record



/ Descriptions

， ○

/ Features


100V~1000V 0.8A

，

/ Applications

.


/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

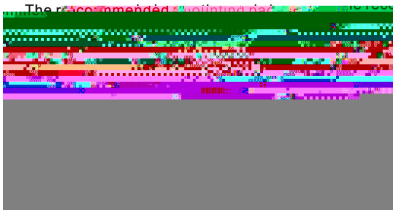

/ Marking



/ Absolute Maximum Ratings(Ta=25)

℃								
)								
)								℃
								℃




)

/ Electrical Characteristics(Ta=25)

			数值	
		℃		μ
		℃		μ




/ Electrical Characteristic Curve

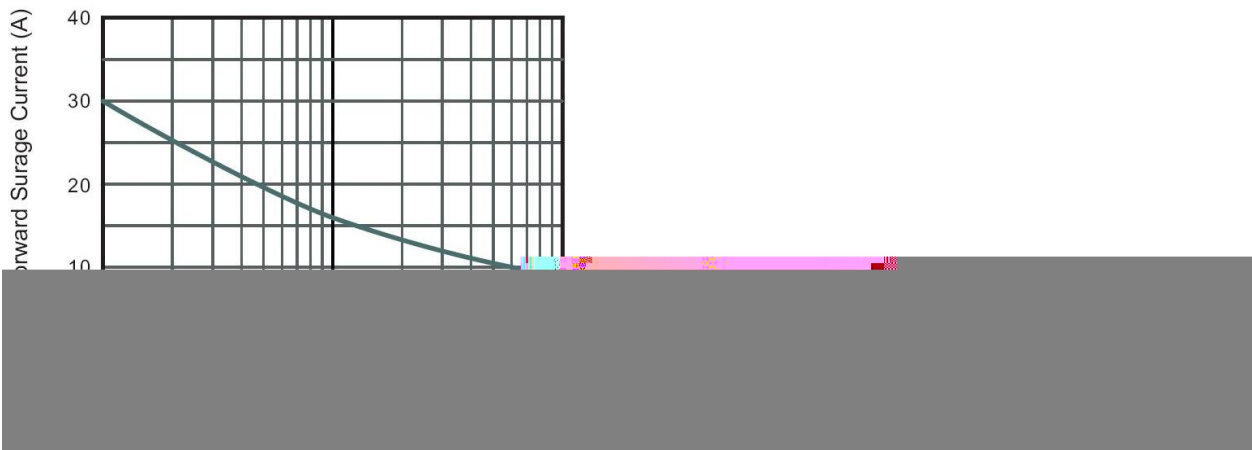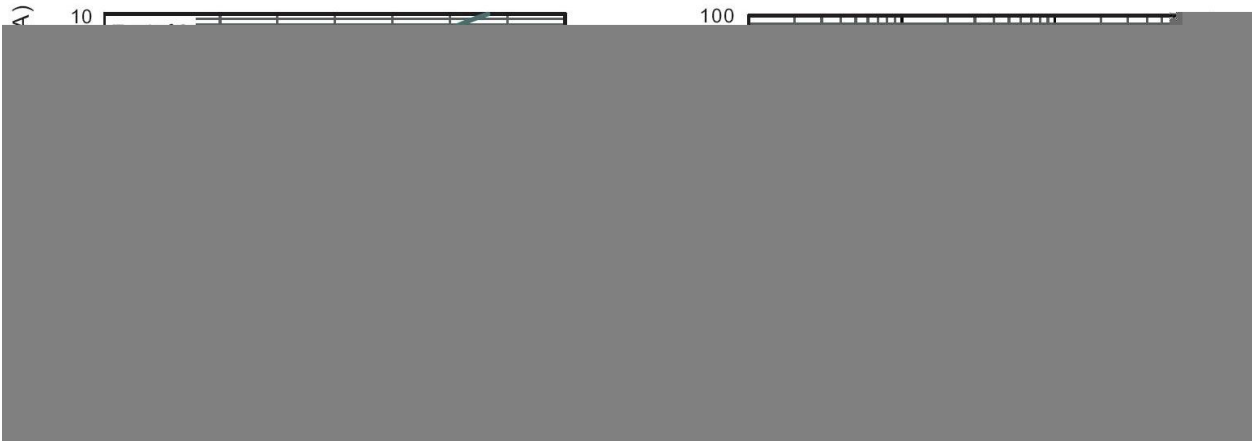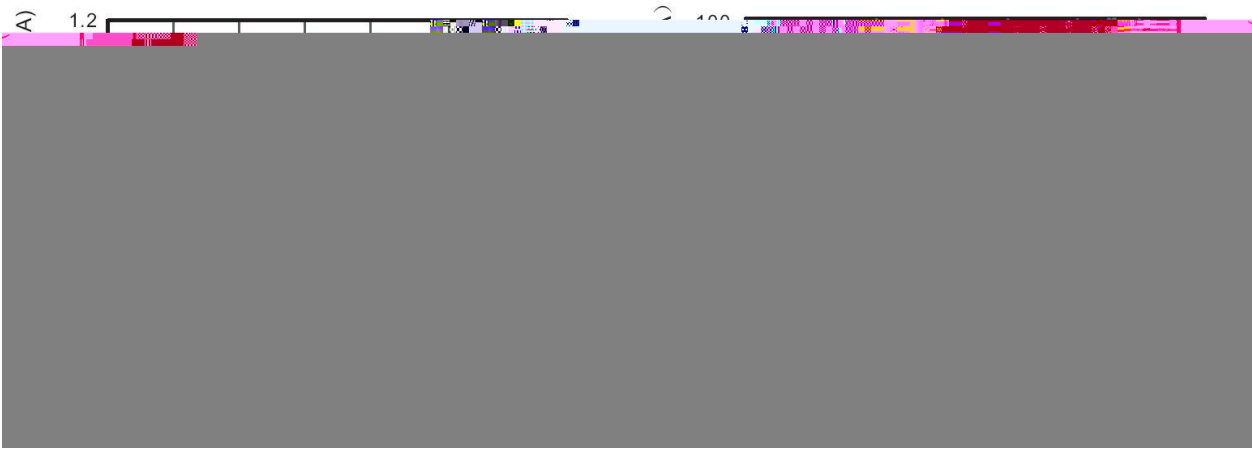



/ Package Dimensions


MBF

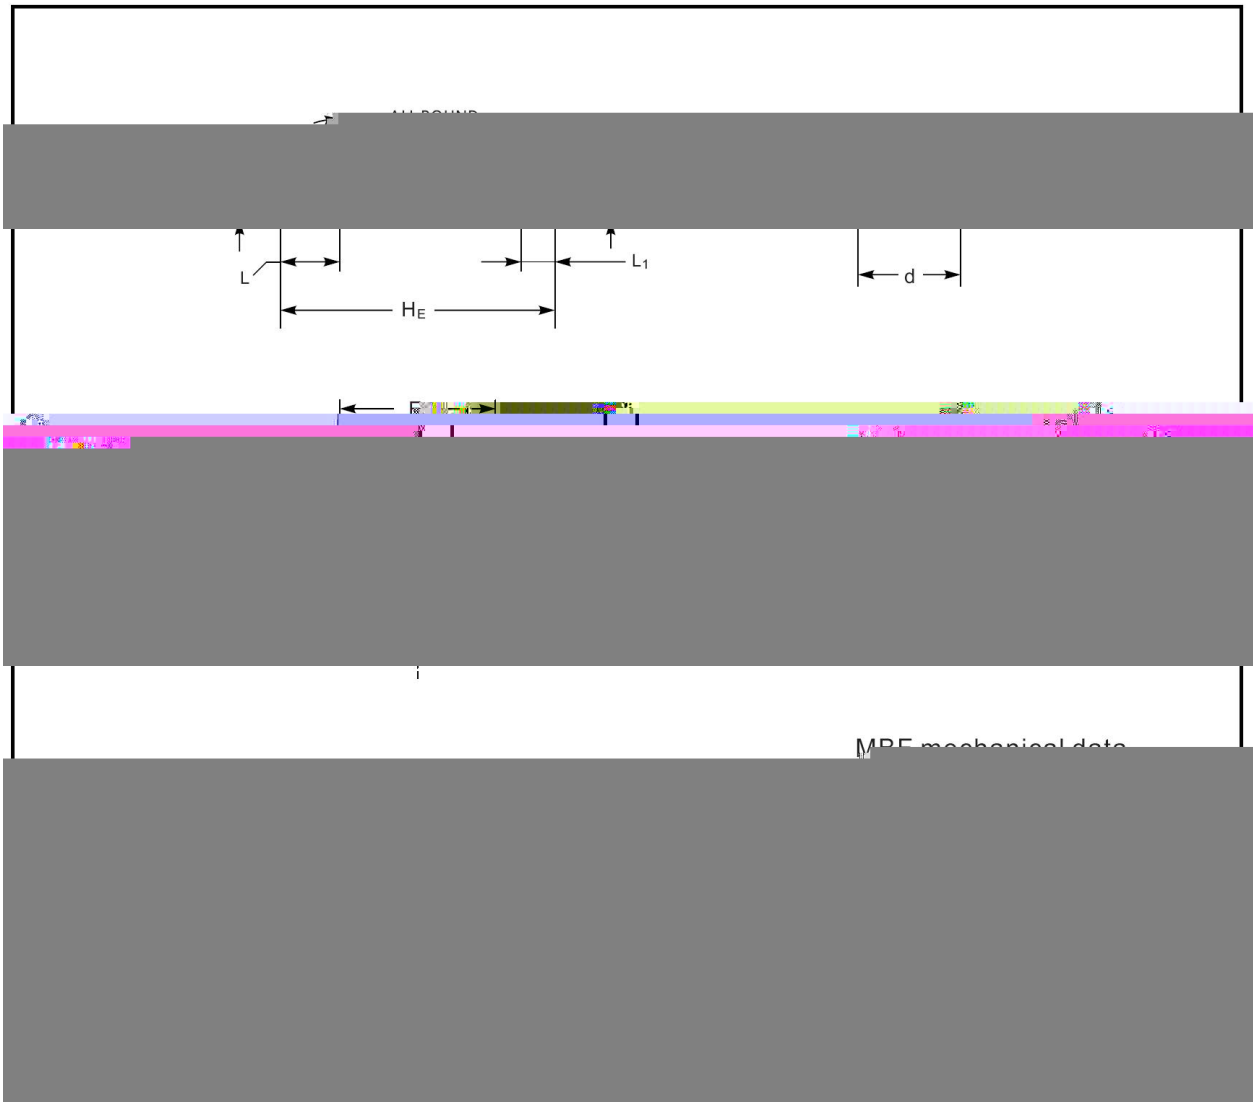




/ Marking Instructions

Marking

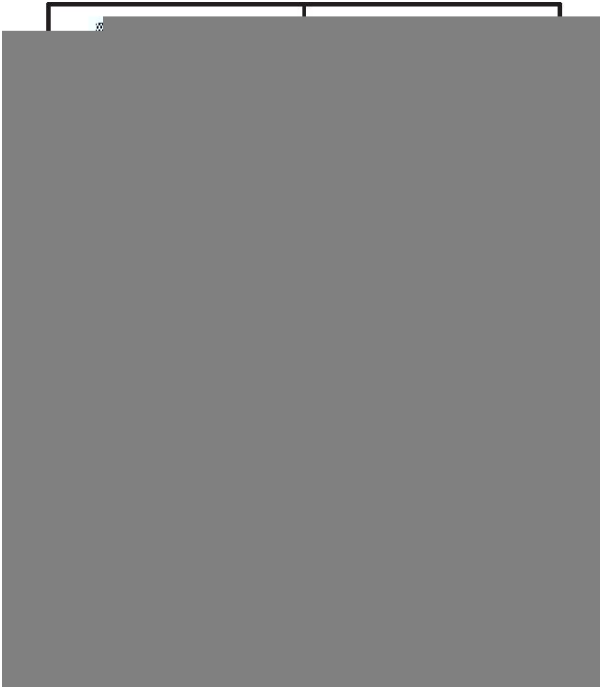




/ Marking Instructions

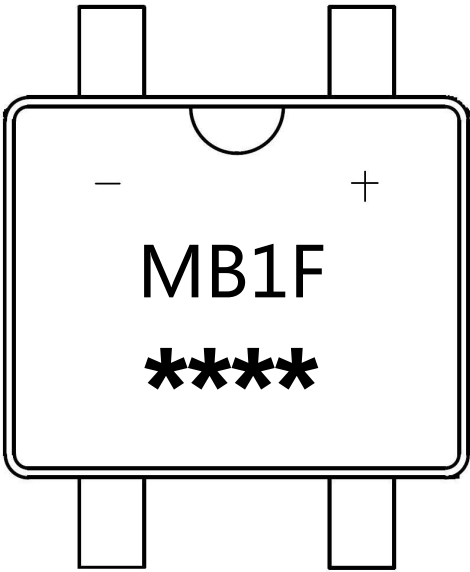


说明

- : 为型号代码
- : 为生产批号追溯码，第 个 为年月代码，后面 个 为当月小批号代码
- :
- :



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

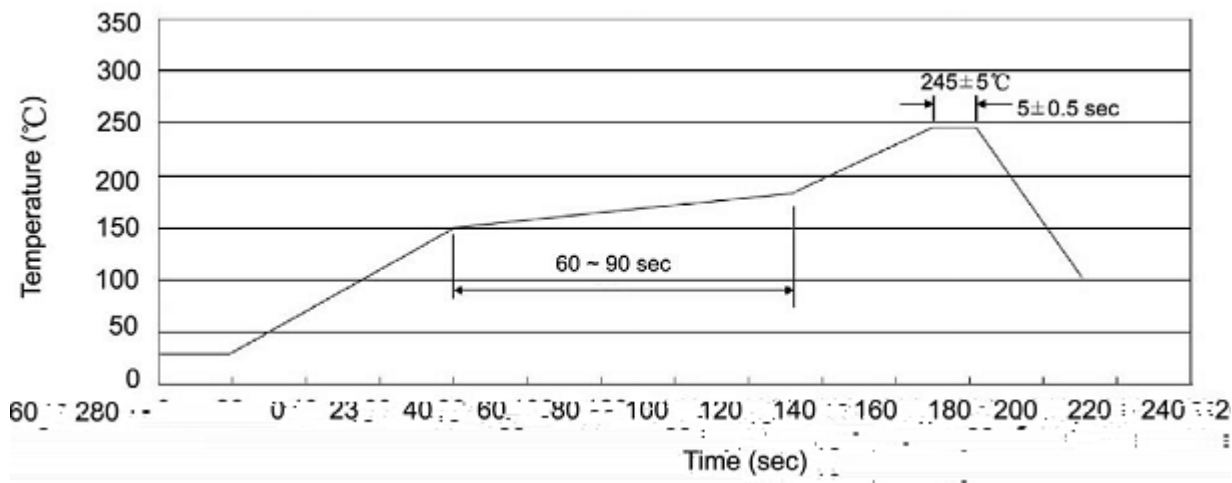

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式

包装数量

包装尺寸

: