


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




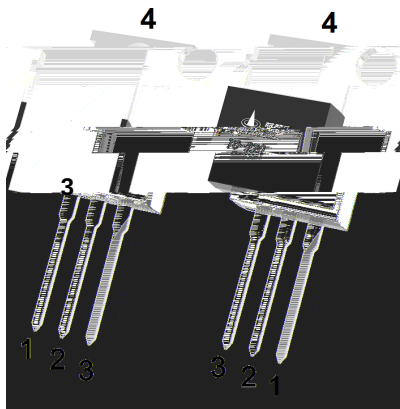


/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

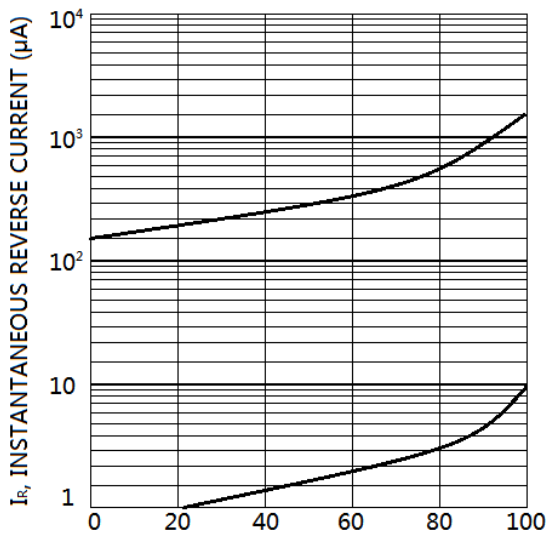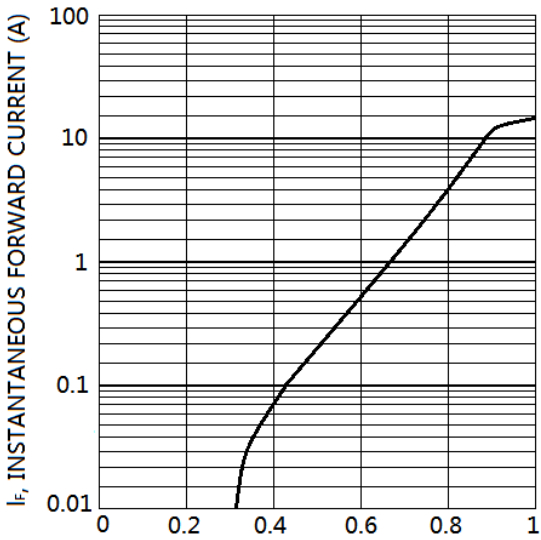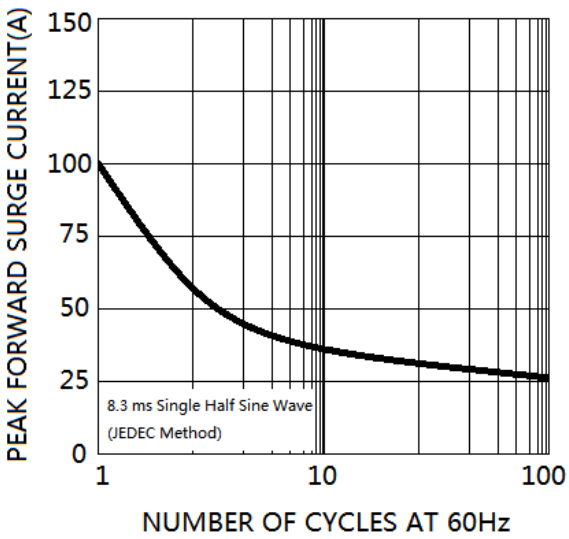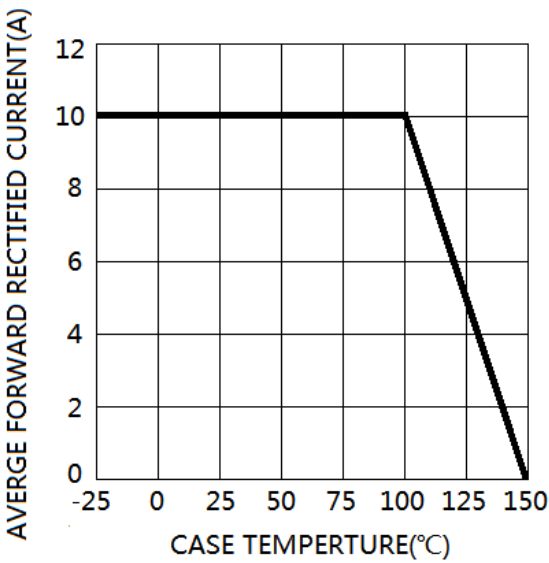


MBR10300-01 (Rev. 00) / 15 2015.05.01 / 15 2015.05.01 / 15 2015.05.01 / 15 2015.05.01

/ Package Dimensions


T□-220

单位: mm

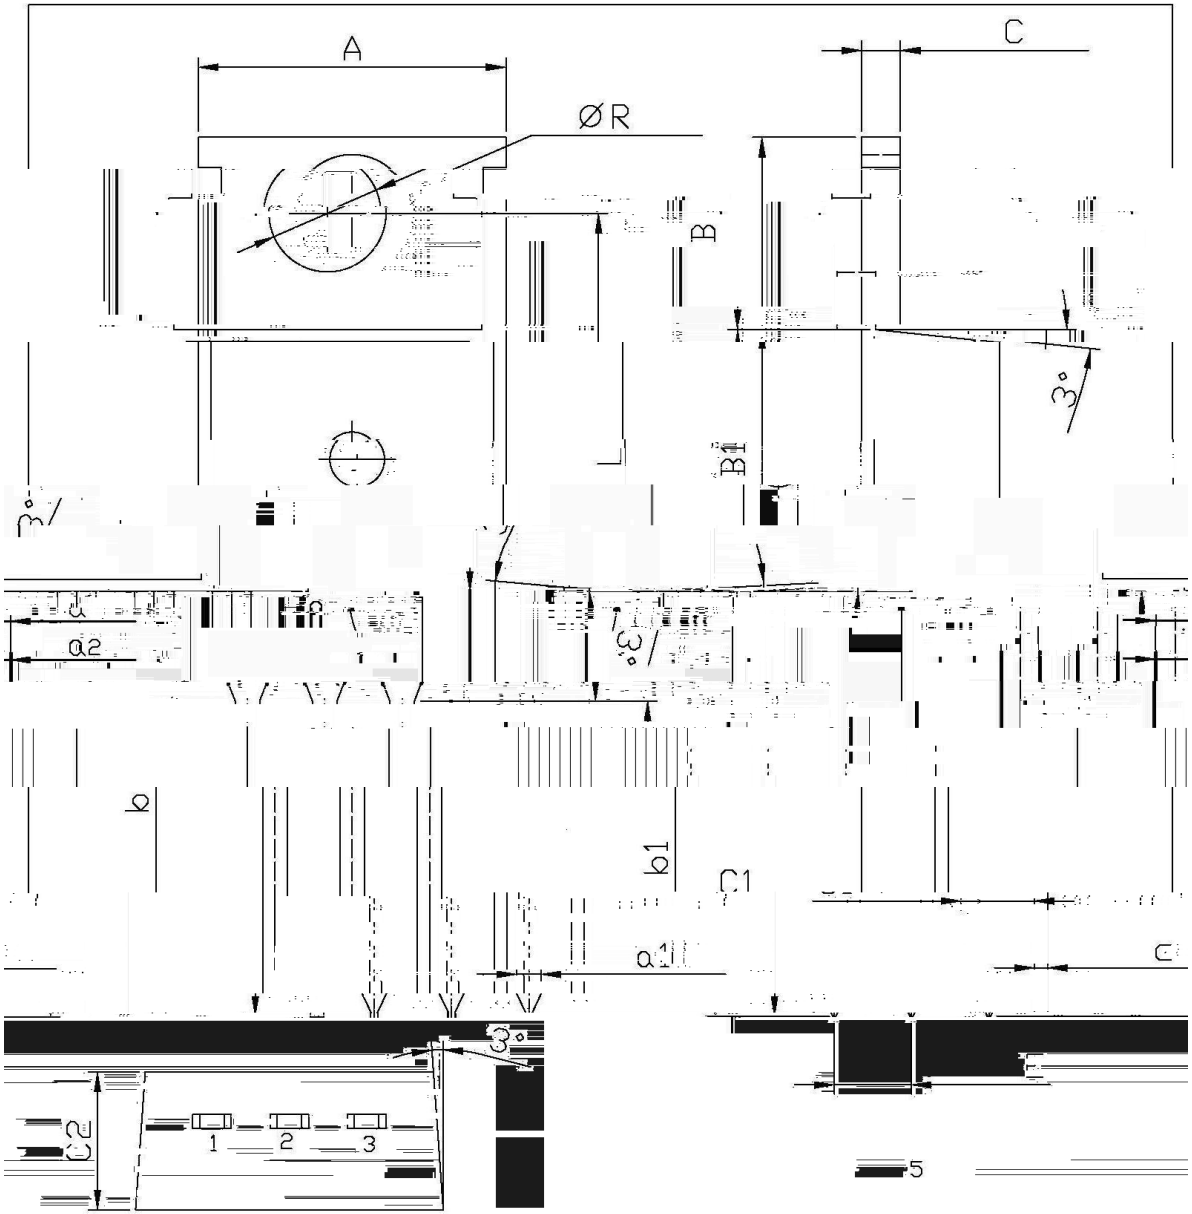


Dimensions In Millimeters				Dimensions In Millimeters			
Symbol	Min	Max	Symbol	Min	Max	Symbol	Min
A	9.8	11.4	C	11.2	13.2	B	16.3
R	3.56	6.7	B1	19.0	21.0	C1	2.6
a	15.7	16.1					
b	12.6	13.6					

/ Marking Instructions

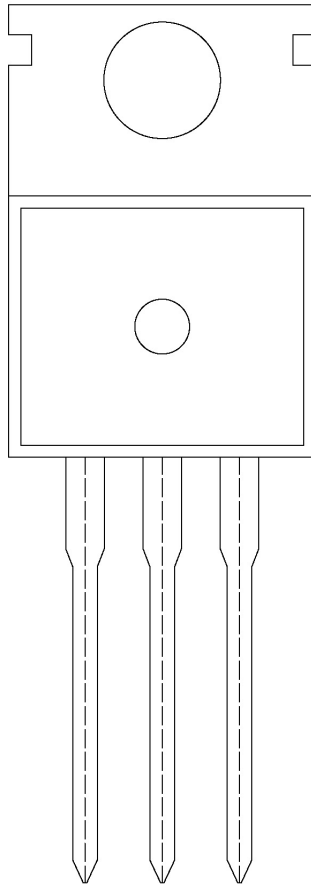

() / Temperature Profile for Dip Soldering(Pb-Free)

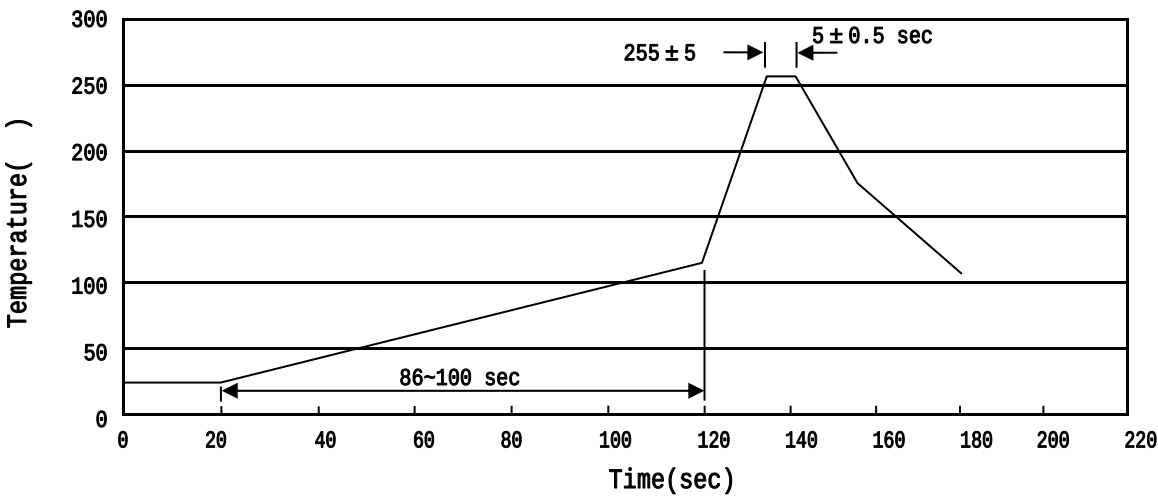

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices