

/ Descriptions

WR0595 MM ≈ 9° || 1


/ Features

“Ω α Η ι ϕ ”


/ Applications

ℓ∘∘ Η Я z ∩ ℓ∘ ℓ∘ || 1 ι 1 ℓ∘ || 1 ι 3 ι∘ || 1

/ Equivalent Circuit



/ Pinning



X

X

X

/ h_{FE} Classifications & Marking

M 1 ”






/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_N	V_{GS}	D 5
	θ		
		$\sim$	


/ Electrical Characteristics(Ta=25)

V_{DS}	I_N	f_{T}	$\omega_{n\theta}$	$\varepsilon_{3\theta}$	$\omega_{z\theta}$	D 5
		$^{\circ}C$				
		$^{\circ}C$				
		$^{\circ}C$				
		$^{\circ}C$				
						μ

/ Electrical Characteristic Curve

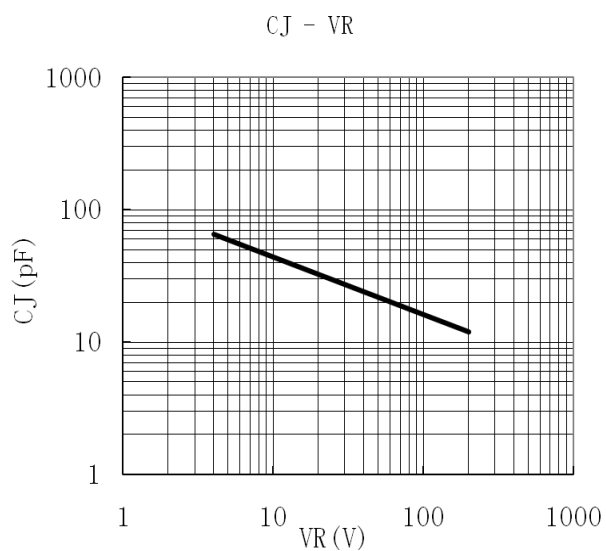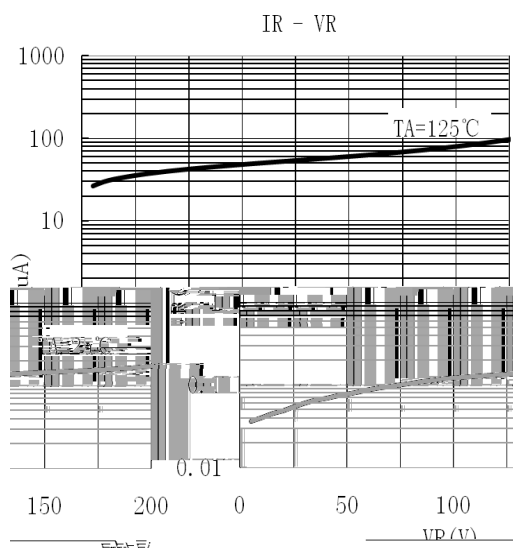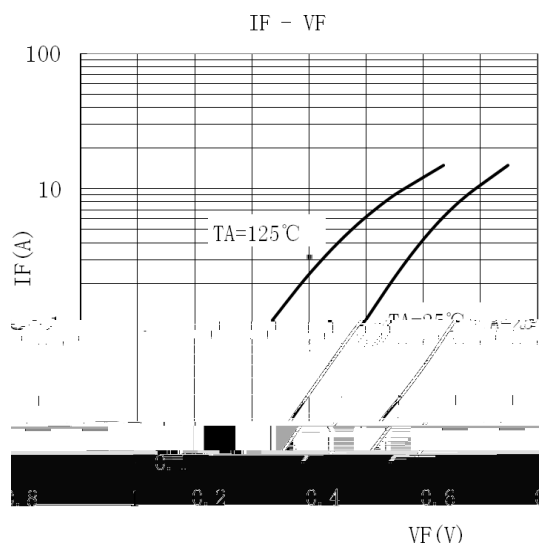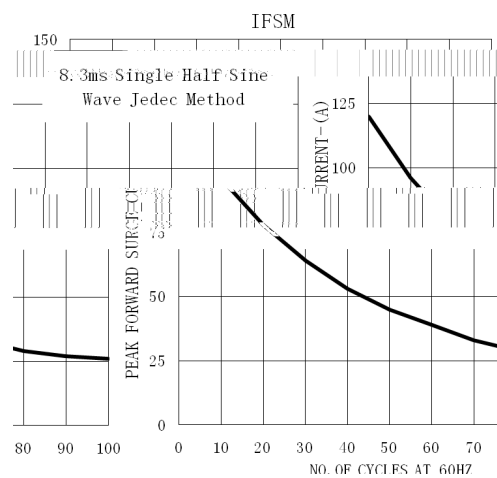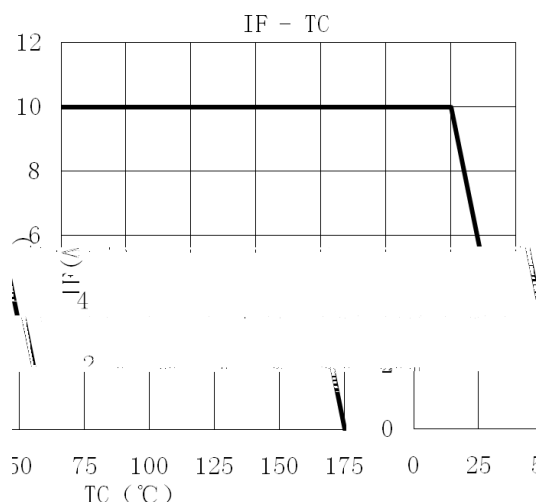


/ Marking Instructions

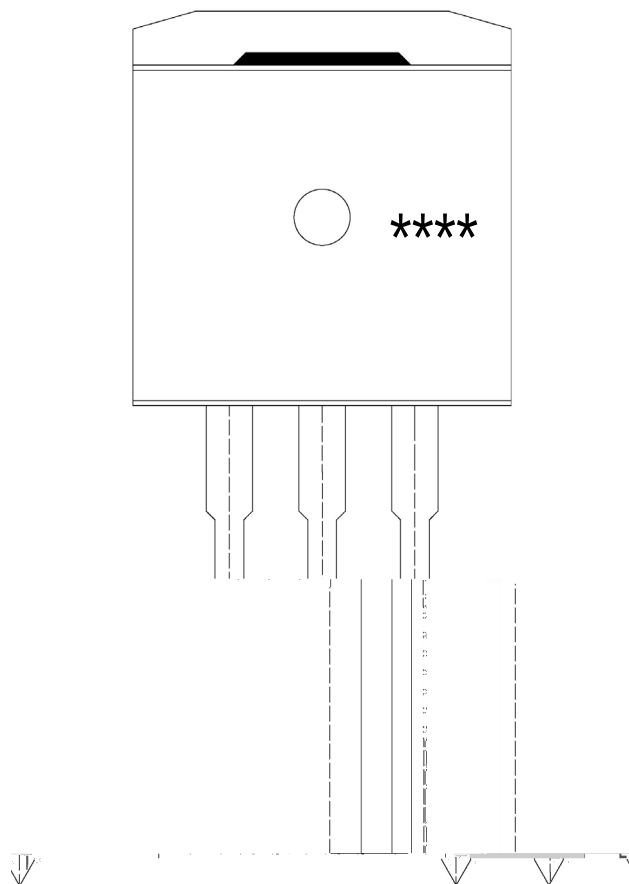

x

() / Temperature Profile for Dip Soldering(Pb-Free)

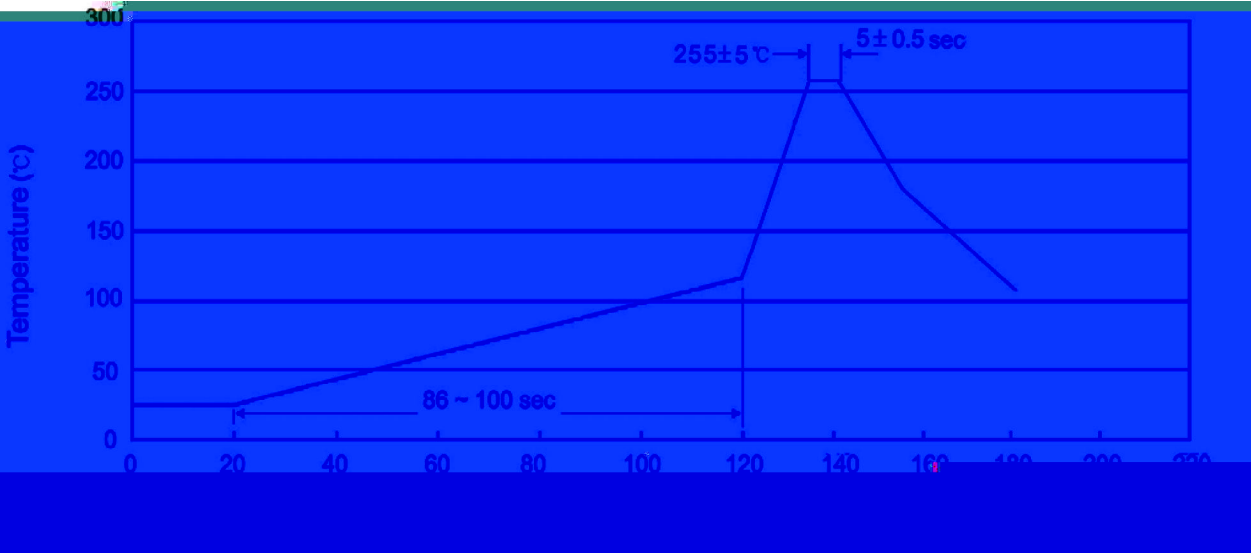

“X”
□ ȳ Ĳ † i`H Ĳ †
Š Œ □ ȳ ° † i`H `Y / Ĳ ° ° † °
i` ȳ, ȳ ȳ Ĳ † †

/ Resistance to Soldering Heat Test Conditions

□ ȳ X ° † `H X °

/ Packaging SPEC.

ȳ ȳ

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱

/ Notices