


/ Descriptions

TO-263

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)



	θ		℃
			℃
			℃

/ Electrical Characteristics(Ta=25)


		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				

1.
2.

/ Electrical Characteristic Curve

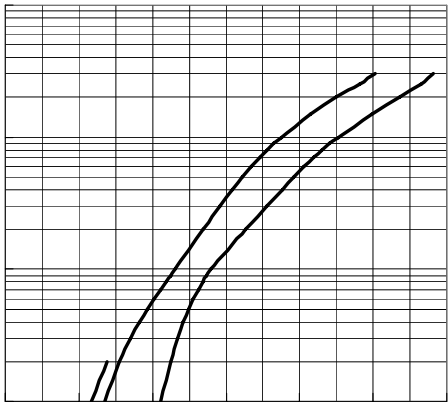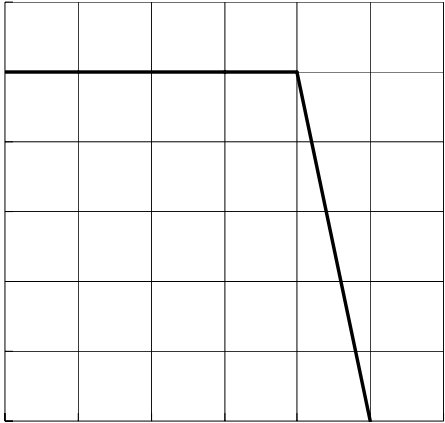


/ Package Dimensions

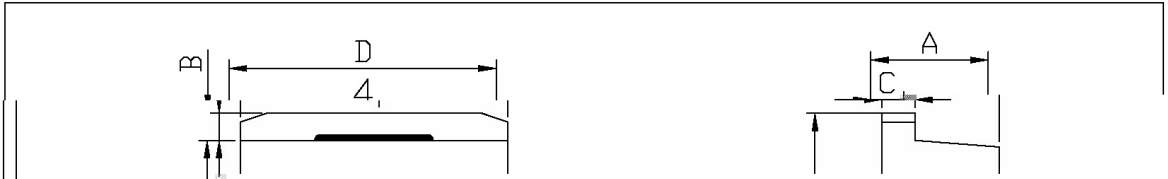

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.30	4.70	E _L	0.00	0.40
B	1.00	1.40	e ₁	2.34	2.74
b	0.70	0.90	e ₂	4.88	5.28
b ₁	1.15	1.35	L ₁	15.00	16.00
b ₂	0.10	0.30	L ₂	2.24	2.54
C	1.20	1.40	L ₃	1.20	1.40
D	9.80	10.20			
T0-263					

/ Marking Instructions

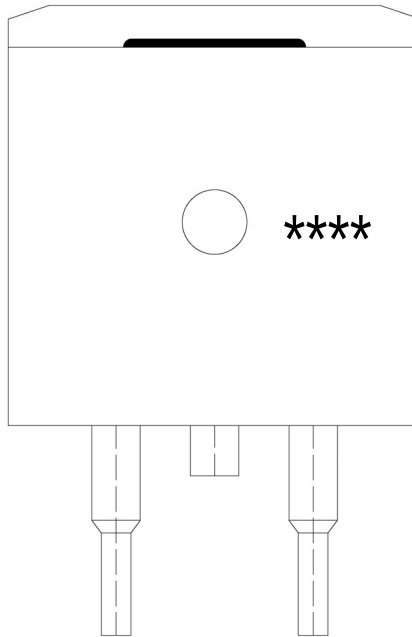

BR

MBRB10100

CT:

MBRB10100CT