
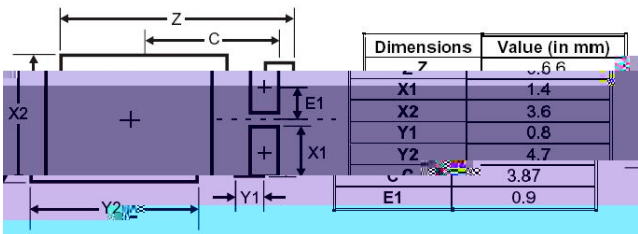


TO-277
Schottky Barrier Diode in a TO-277 Plastic Package.

Low forward voltage drop,low power losses,High efficiency operation. HF Product.

OR-ing DC-DC
For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.



PIN1 Anode PIN 2 Cathode PIN 3 Anode

Suggested Pad layout

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RM} V_{RSM} V_{DC}	100	V
RMS Voltage	V_{RMS}	71	V
Average Rectified Forward Current	$I_{F(AV)}$	1×5	A
Non Repetitive Peak Surge Current	I_{FSM}	120	A
Thermal Resistance Junction to Air Note 1	R_{JA}	110	°C/W
Junction and Storage Temperature Range	T_J T_{stg}	-65 175	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Breakdown Voltage	V_{BR}	$I_R=200\mu A$	100			V
Forward Voltage	V_F	$I_F=5A(T_a=25^\circ C)$		0.74	0.79	V
		$I_F=5A(T_a=100^\circ C)$		0.64	0.68	V
		$I_F=5A(T_a=125^\circ C)$		0.60	0.64	V
		$I_F=10A(T_a=25^\circ C)$		0.81	0.89	V
		$I_F=10A(T_a=125^\circ C)$		0.68	0.73	V
Instantaneous Reverse Current	I_R Note 2	$V_R=100V(T_a=25^\circ C)$		0.002	0.2	mA
		$V_R=100V(T_a=100^\circ C)$		0.5	5.0	
		$V_R=100V(T_a=125^\circ C)$		2.0	20	

/Notes

1. FR-4 PCB 2


FR-4 PCB, 2oz. Copper, minimum recommended pad layout per.


2.


Short duration pulse test used to minimize self-heating effect.

3.

Unless otherwise noted, values for the parameters of a single chip

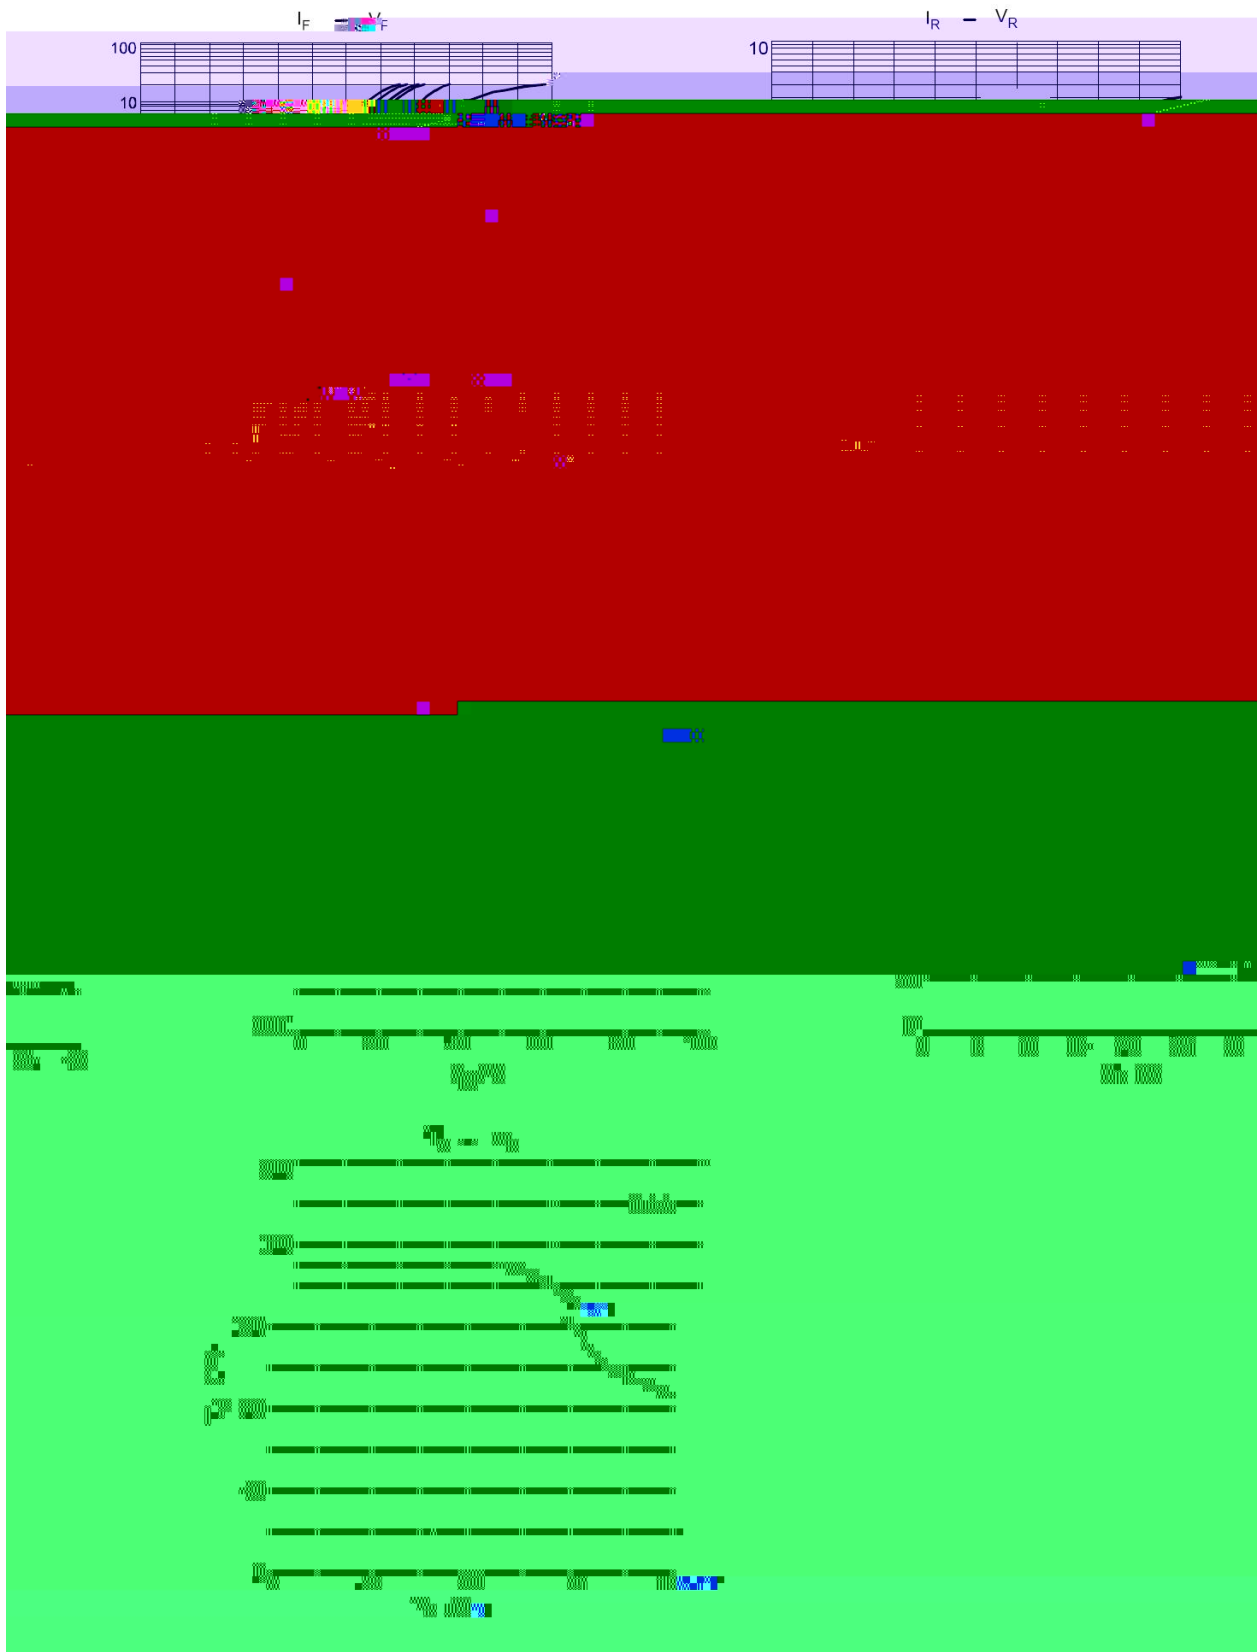

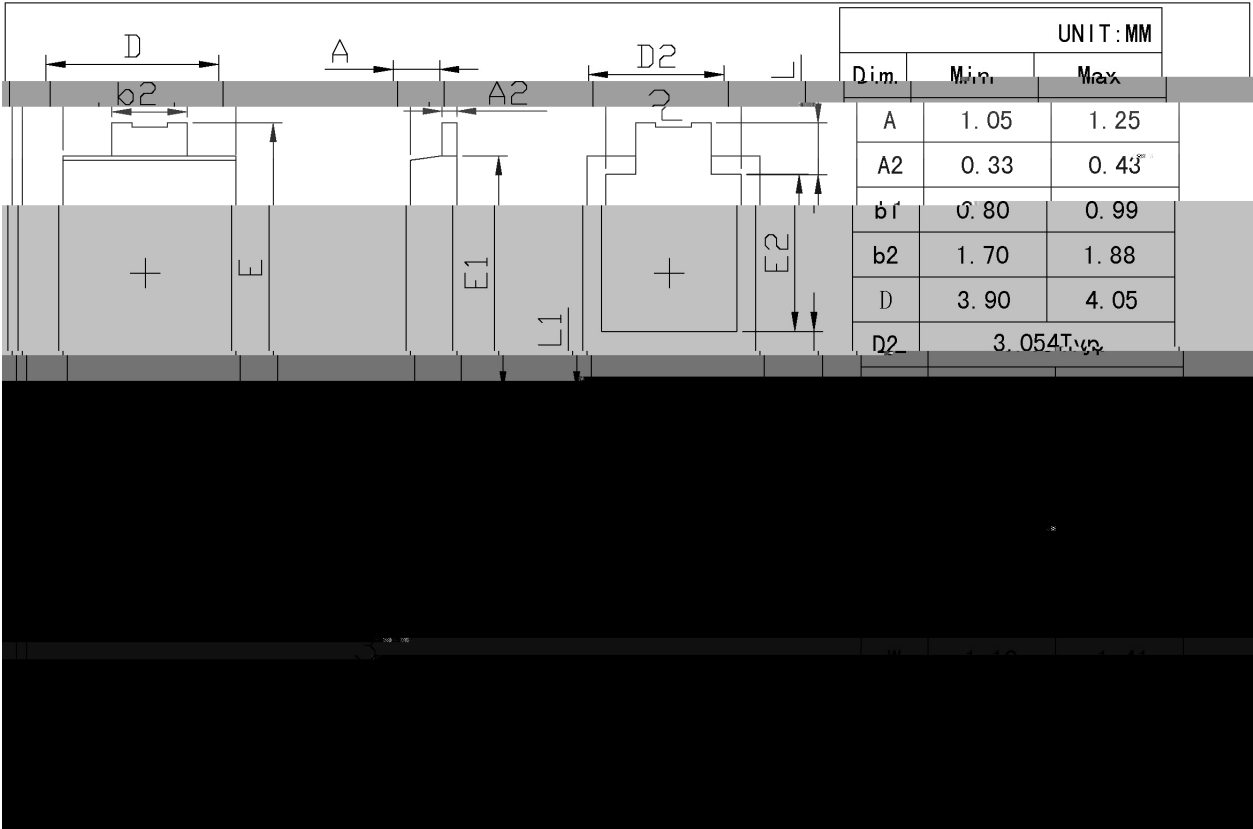

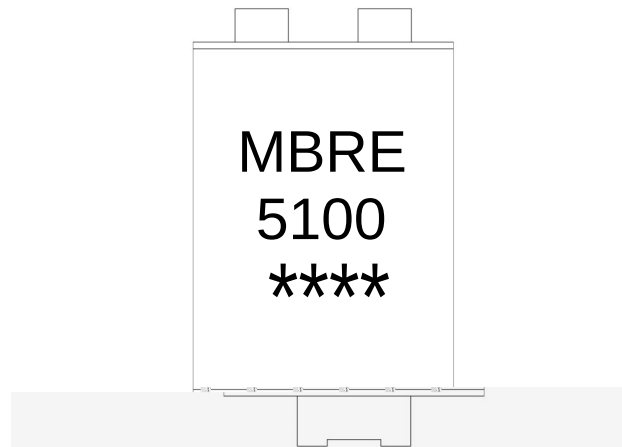

MBRE5100


Note:

MBRE5100

****:

Product Type.

Lot No. Code, code change with Lot No.

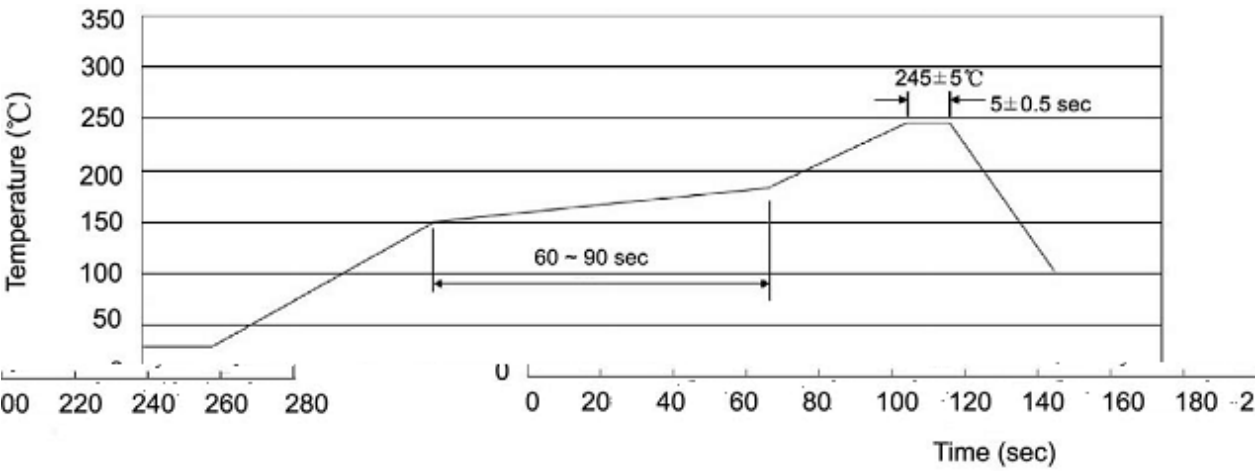

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5℃

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-277	5,000	3	15,000	6	90,000	13 ×12	360×360×50	380×335×366