/ Descriptions

TO-220F

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

( )			
	θ		℃
			℃
			℃

/ Electrical Characteristics(Ta=25)

		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
						μ

/ Electrical Characteristic Curve

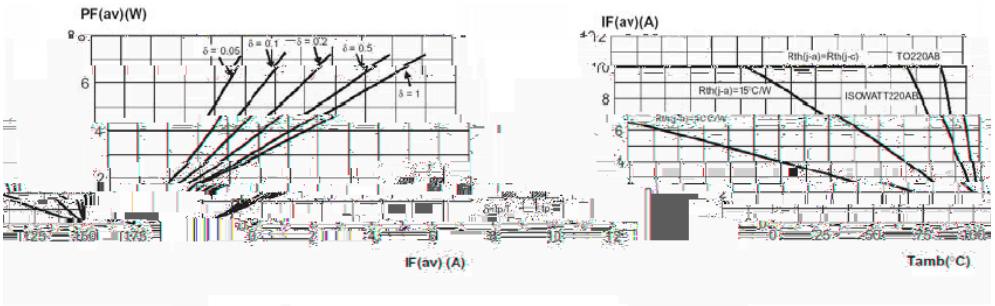

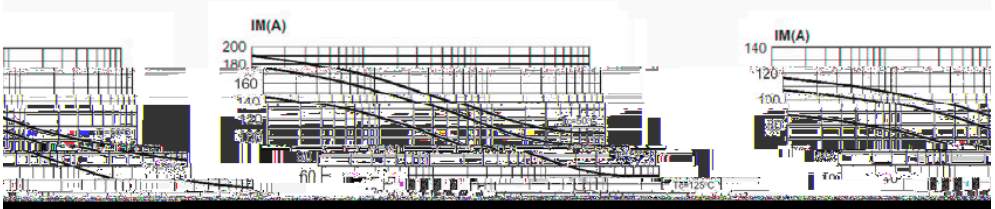

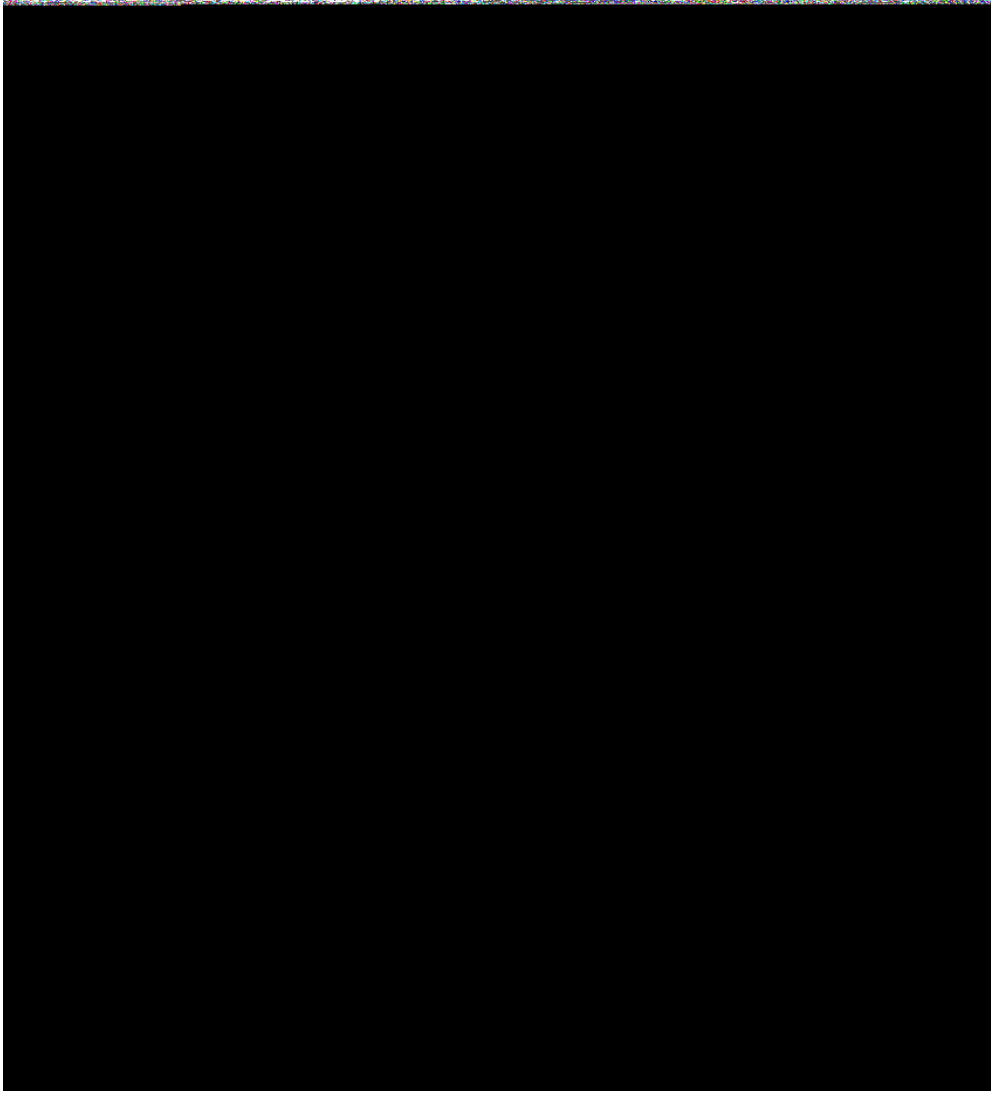

/ Package Dimensions

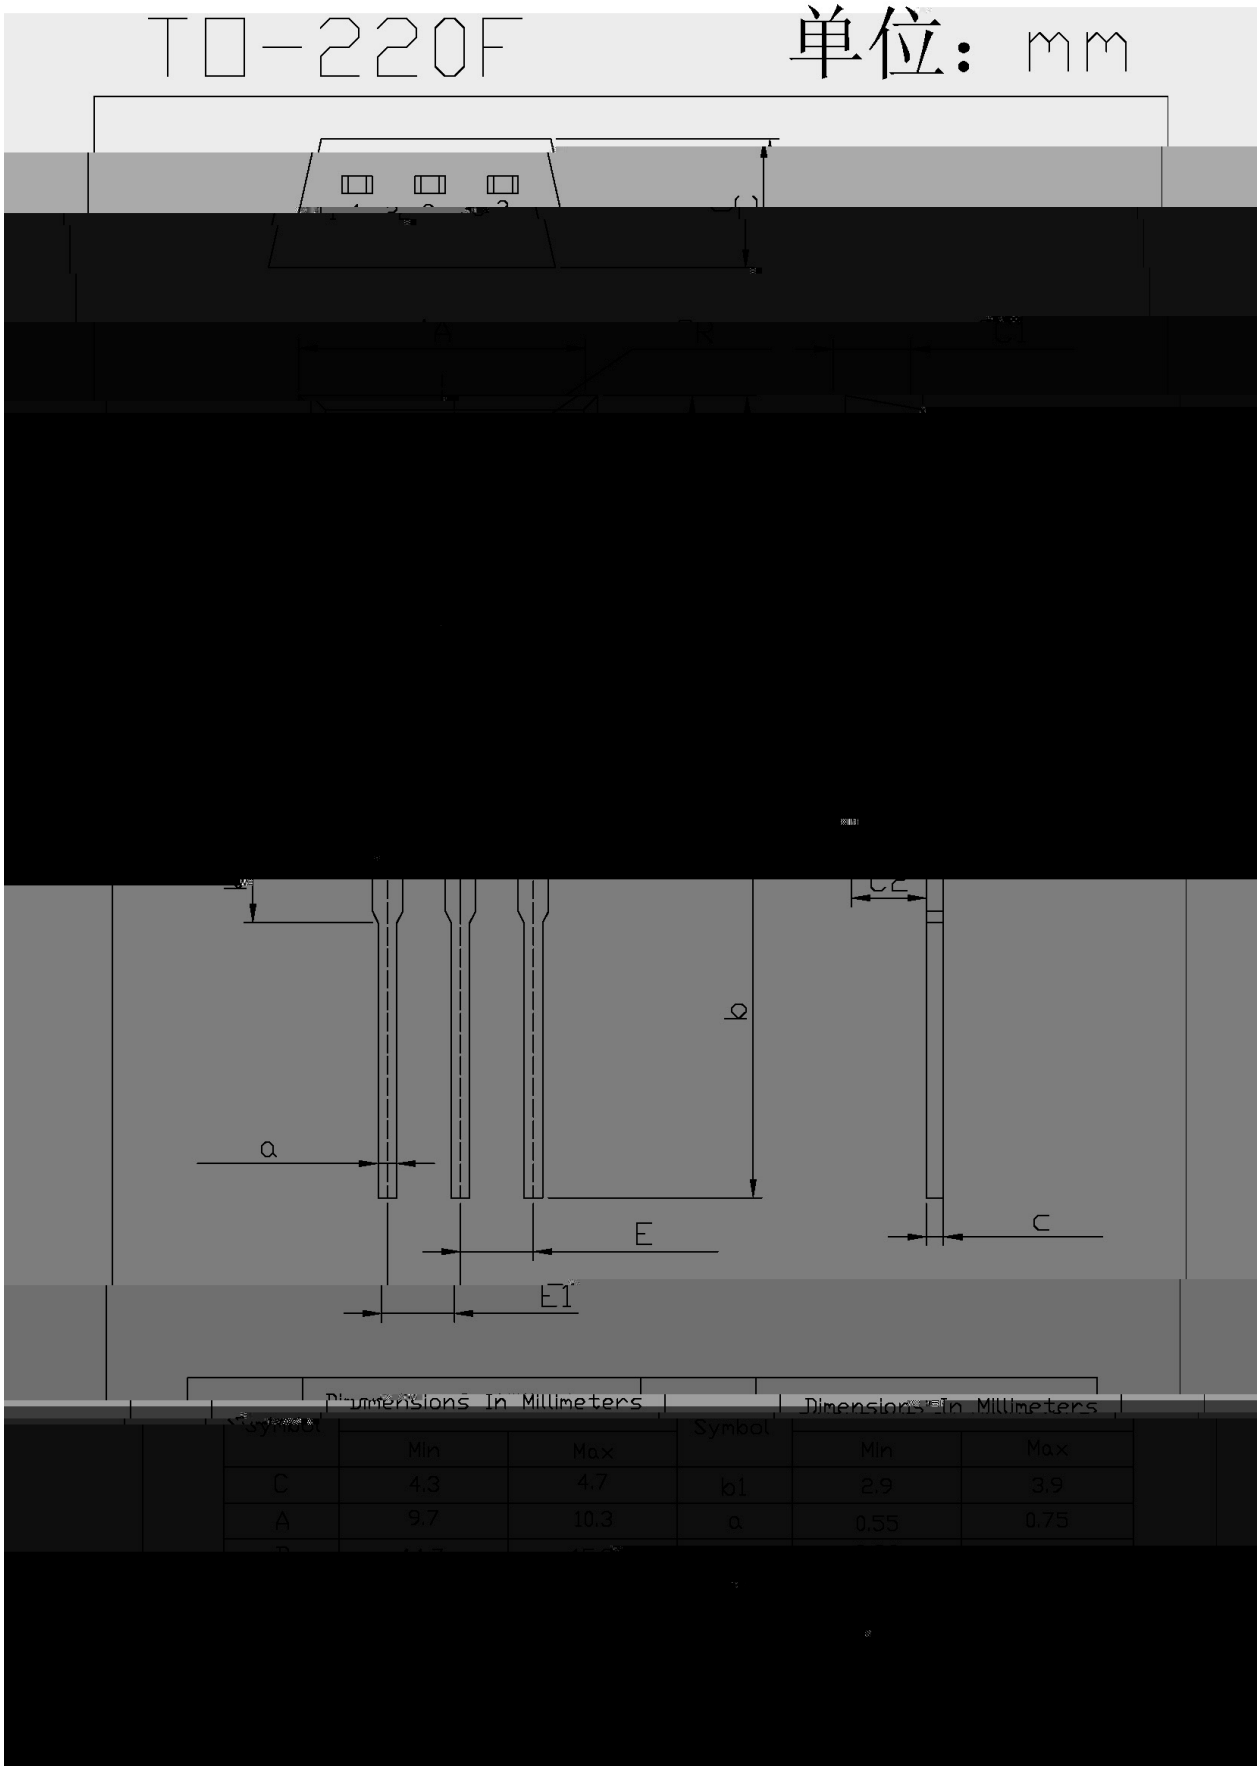

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
C	4.3	4.7	b1	2.9	3.9
A	9.7	10.3	a	0.55	0.75

/ Marking Instructions

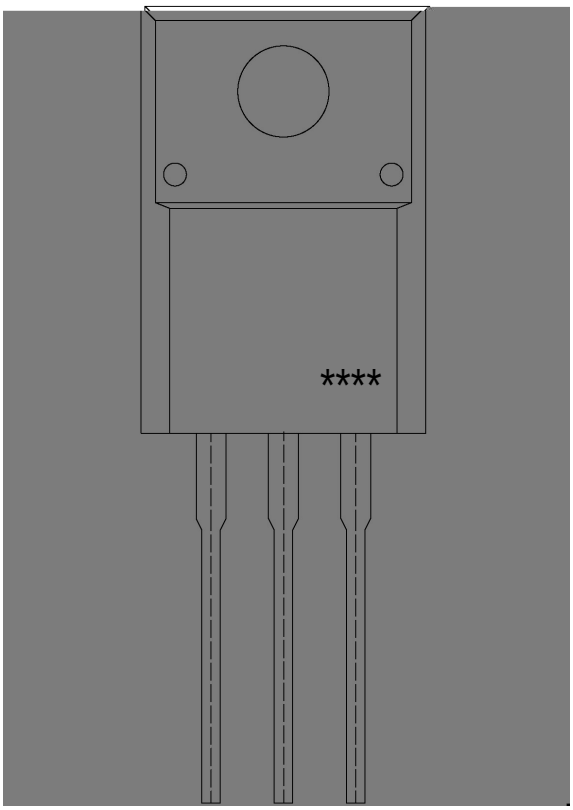

BR

MBRF20H100

CT:

****

( ) / Temperature Profile for Dip Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195