

/ Descriptions

WR0585 SQS


/ Features

—


—

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ

/ Electrical Characteristic Curve

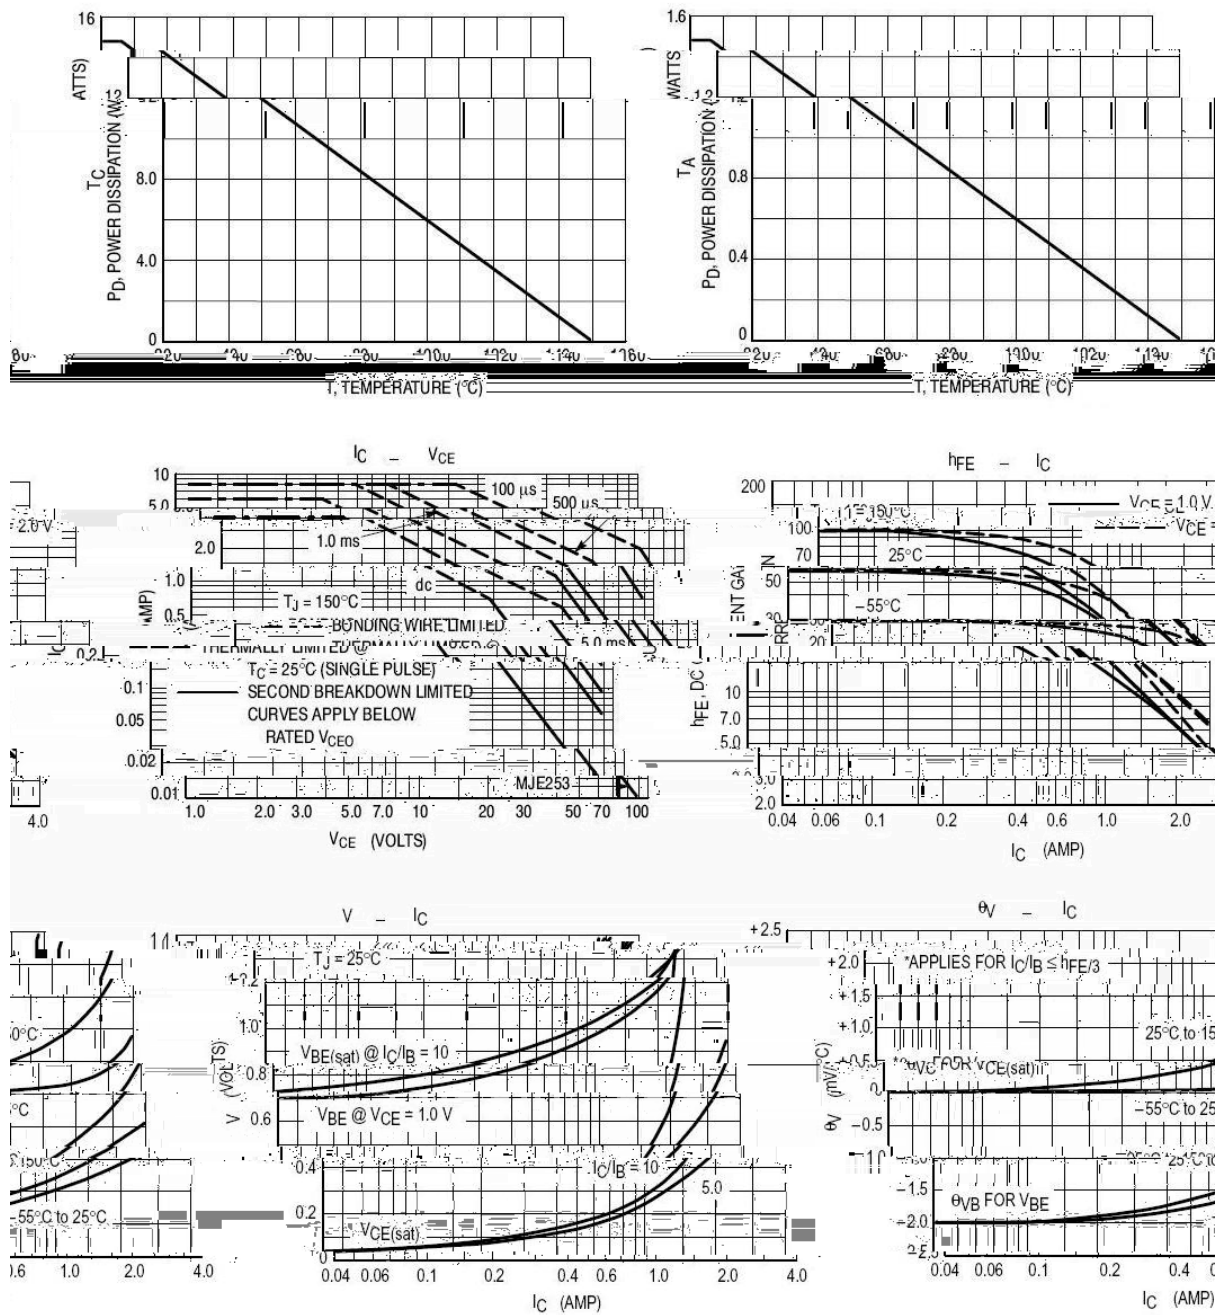


/ Package Dimensions

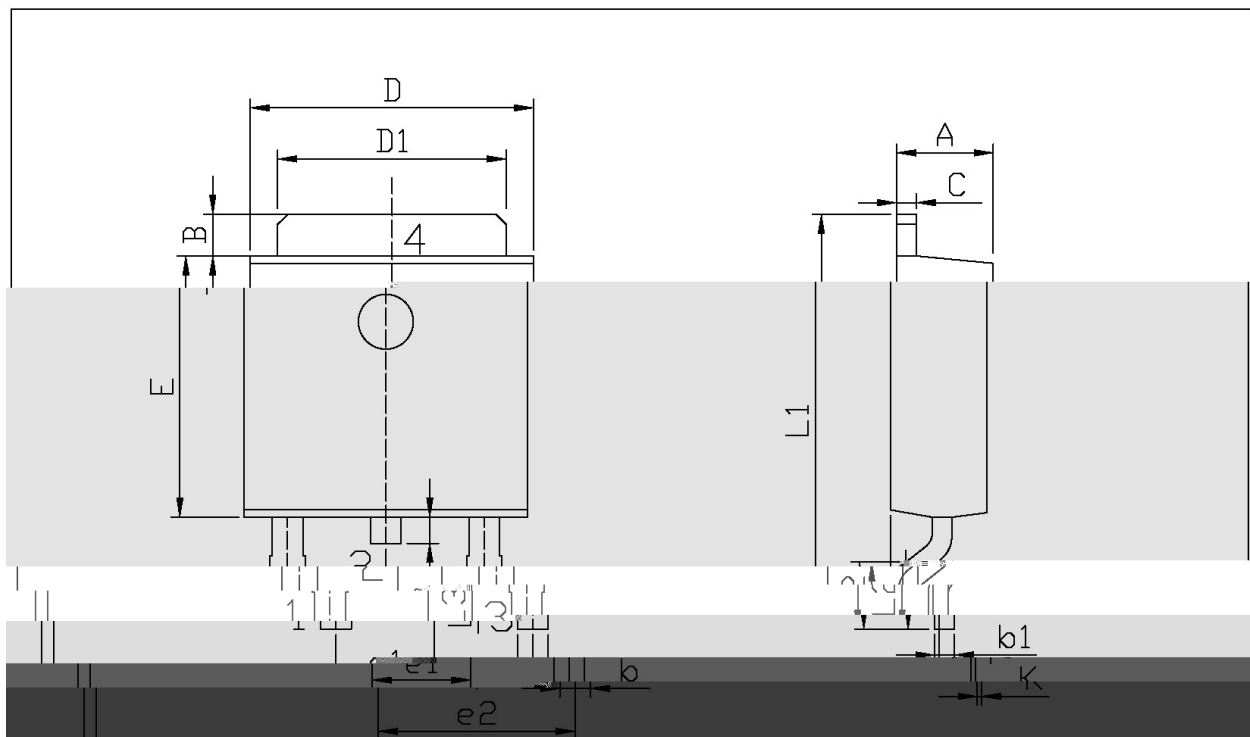

单位: mm


TS			Dimensions In Millimeters				Dimensions In Millimeters		
			Symbol	Min	Max		Symbol	Min	Max
			A	2.20	2.40	E	5.95	6.25	
55			B1	0.45	0.55	F1	9.45	9.75	
75			C	0.45	0.55	G2	1.25	1.50	
90			D	6.45	6.75	L3	0.60	0.75	
110			D1	5.10	5.50	K	0.00	0.10	

/ Marking Instructions

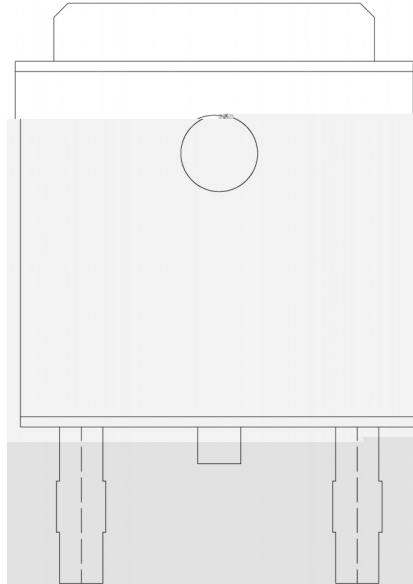

PMG586

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

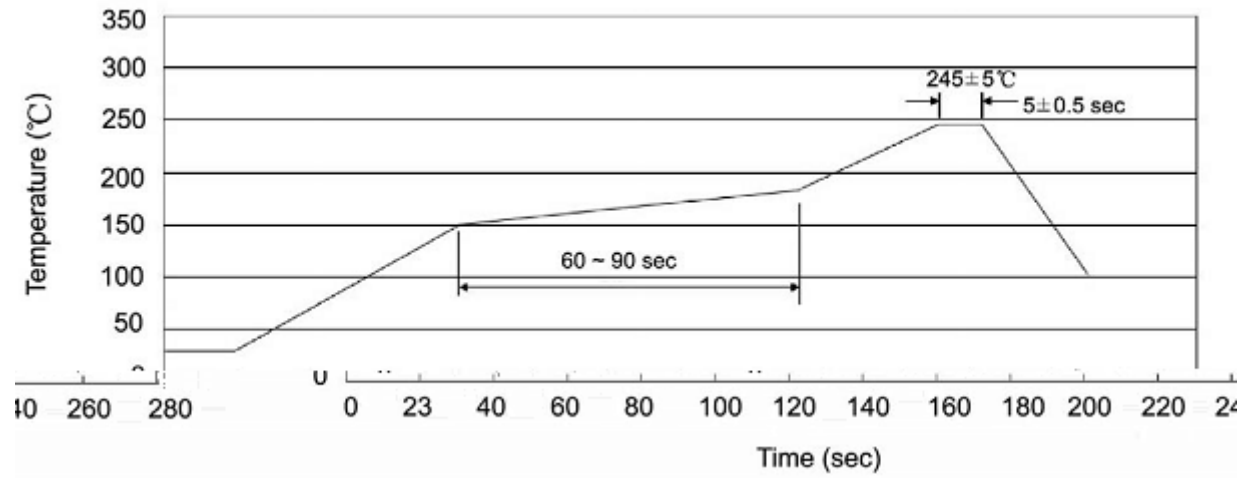

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

/ Resistance to Soldering Heat Test Conditions

2

3/8

2

3/8

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱