


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃
			℃
			℃


/ Electrical Characteristics(Ta=25)

μ

/ Electrical Characteristic Curve

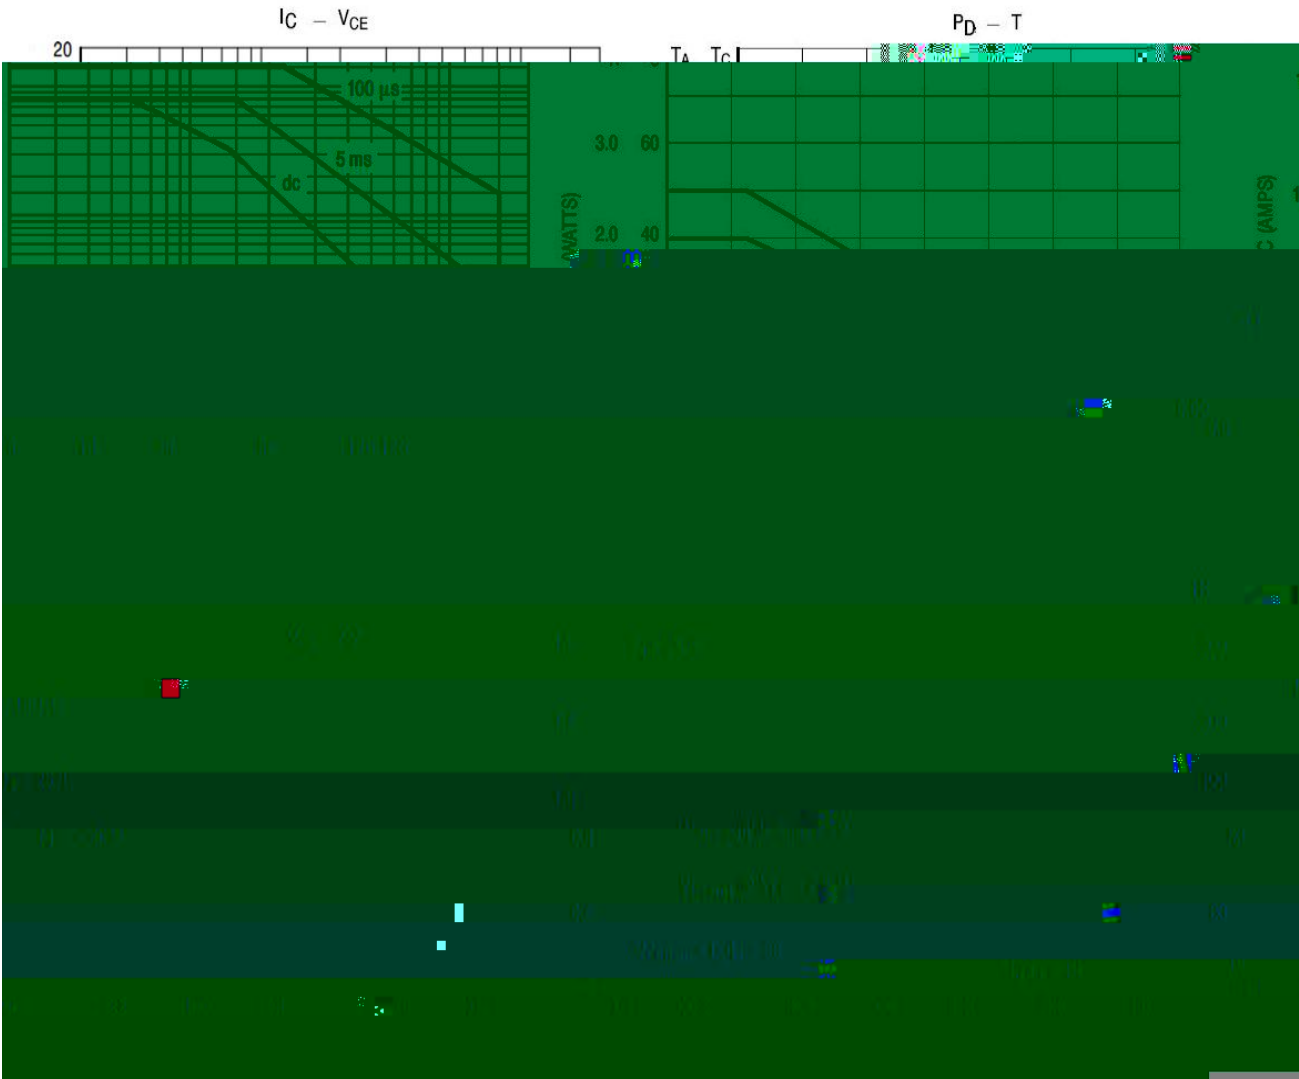


/ Package Dimensions

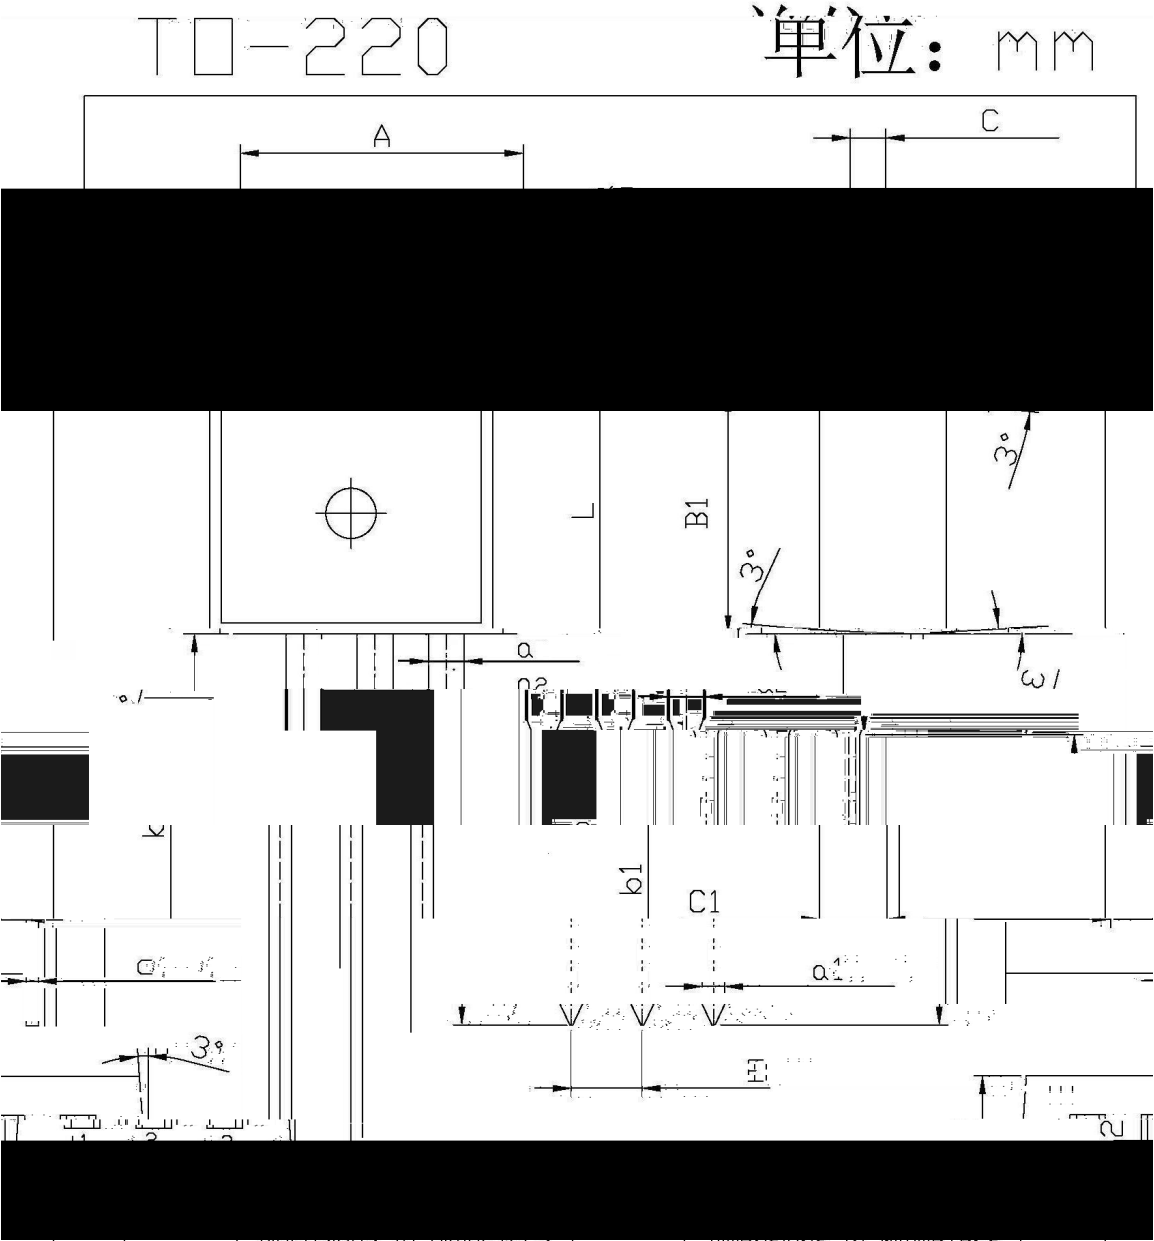


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
B	3.56	3.64	B1	6.3	6.7
B1	9.0	9.4	C1	2.2	2.6
a	1.22	1.32	c	0.4	0.6
Q2	1.25	1.45			

/ Marking Instructions

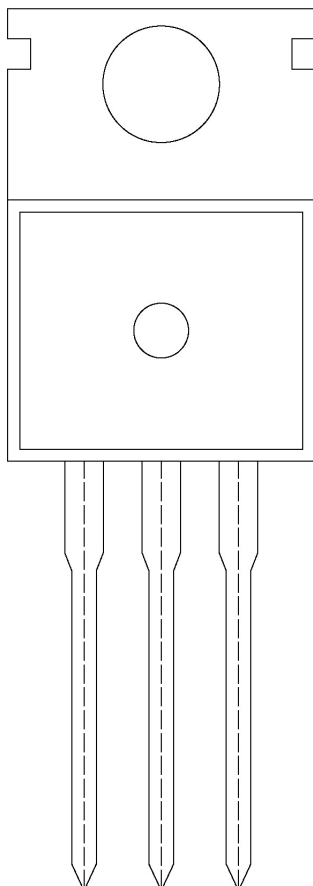

() / Temperature Profile for Dip Soldering(Pb-Free)

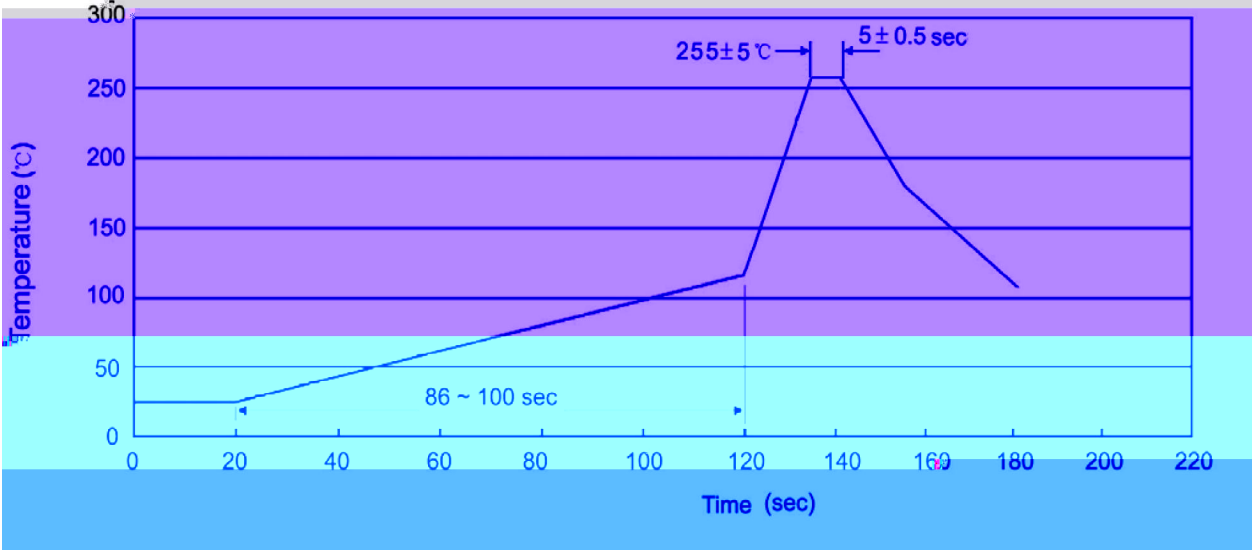

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

/ Notices