

MMBT5401W

“Y / Descriptions


SOT-323 PNP

• Ę / Features


, MMBT5551W

v / Applications

Ѕ ˆ ǻ = / Equivalent Circuit



ã ı ů / Pinning




ı. ı ħ / Marking


绝对最大值 / Absolute Maximum Ratings(Ta=25 ℃)

电 学 特 性 / Electrical Characteristics(Ta=25 ℃)


						μ
						μ
						μ
						μ
						μ

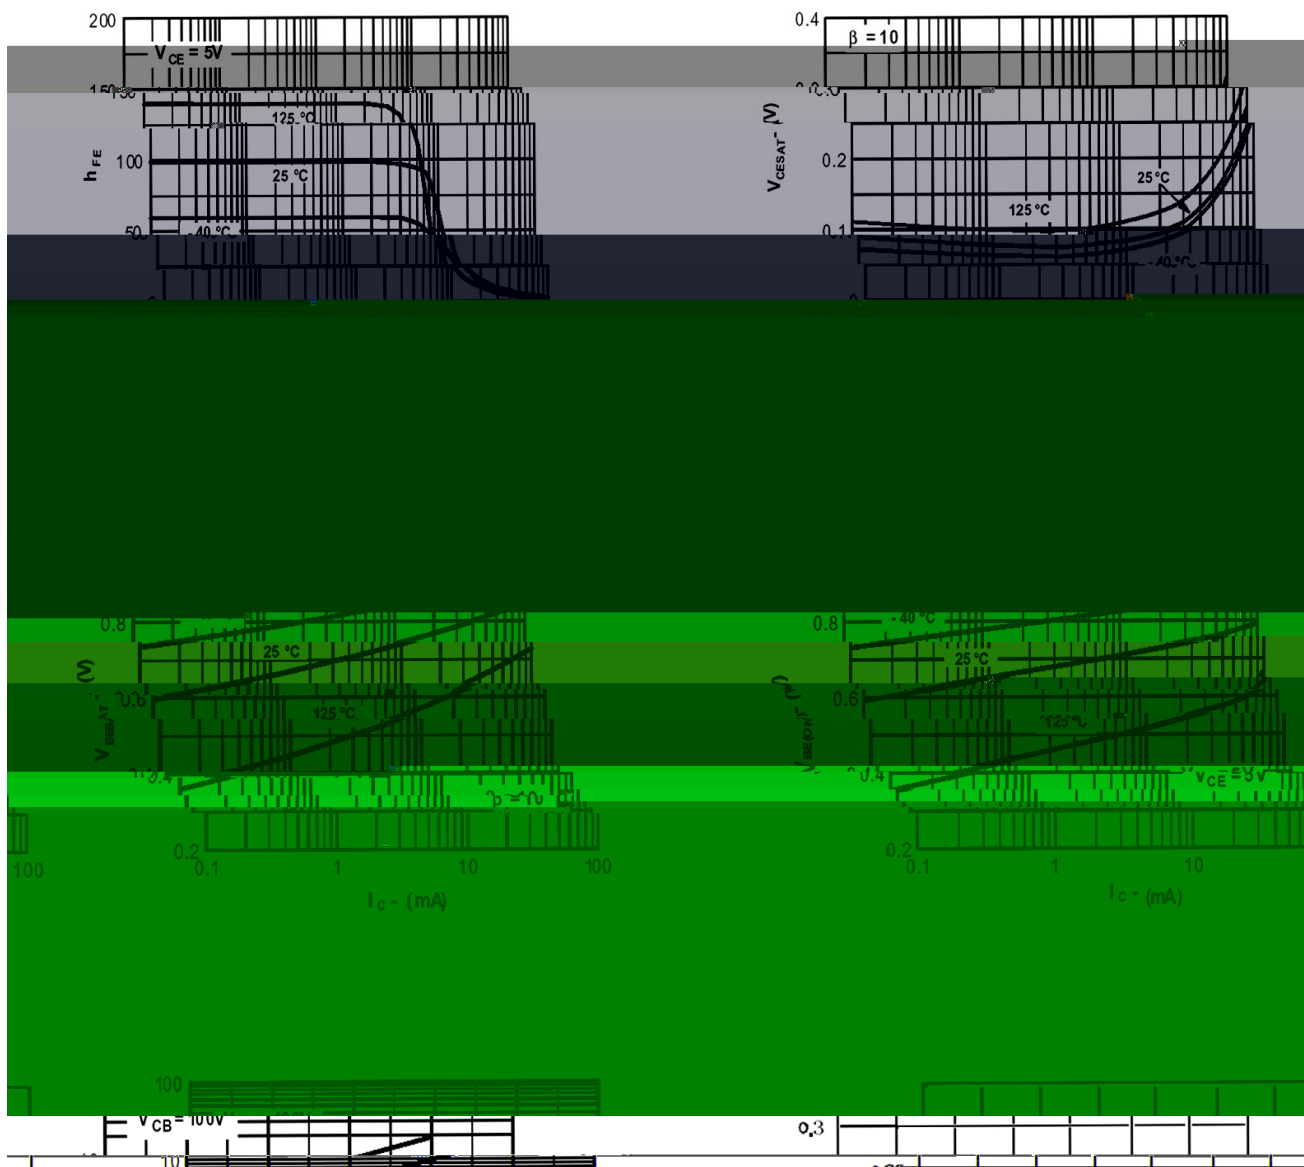Electrical Characteristic Curve


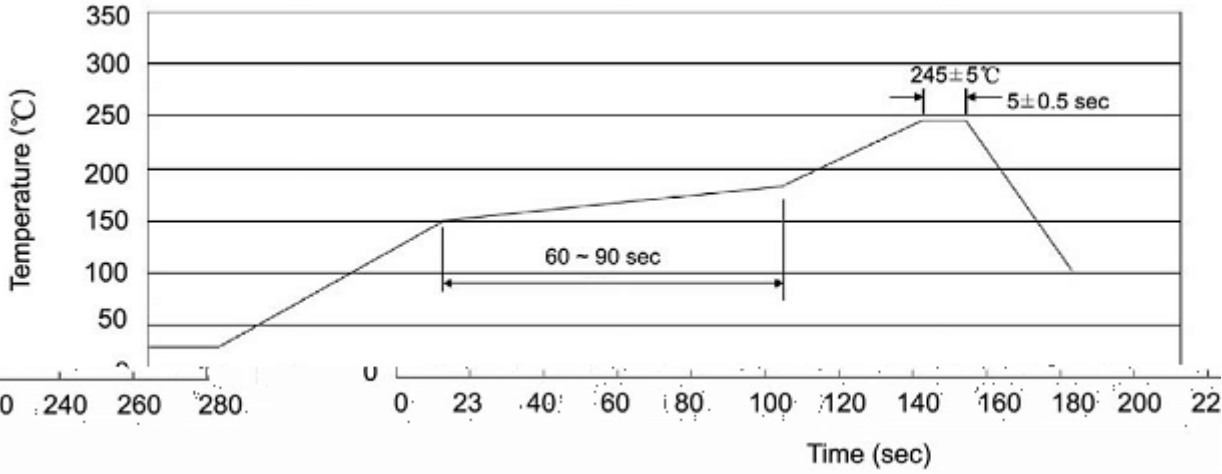
Package Dimensions

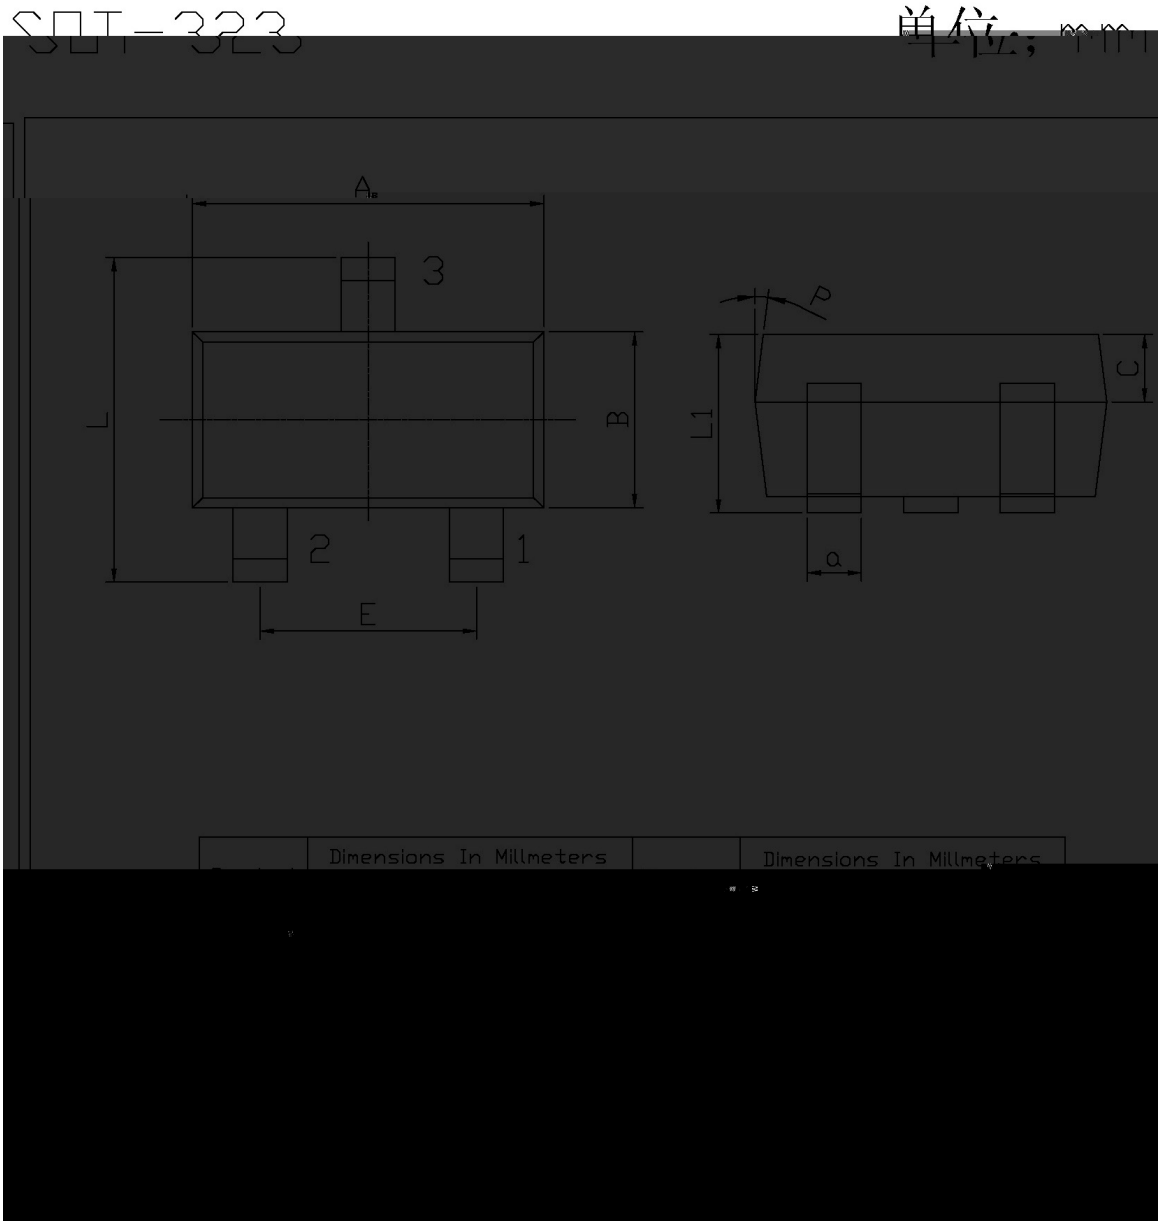

4. 符号 / Marking Instructions

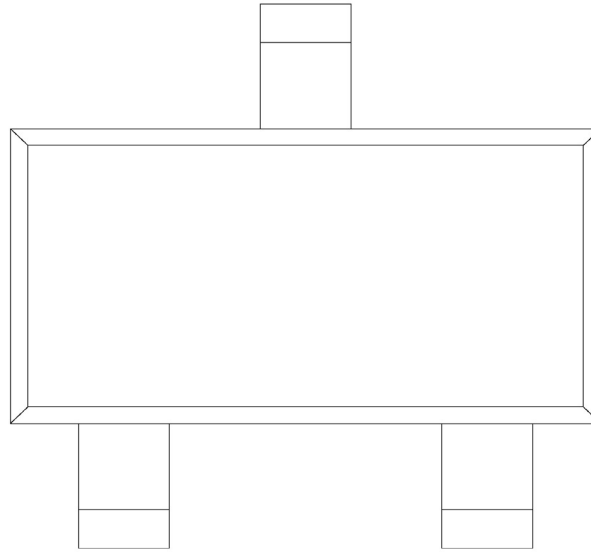

Thermal Characteristics / 热特性



± ± ± ±

Resistance to Soldering Heat Test Conditions / 抗焊热测试条件

± ±

Packaging SPEC. / 封装规格

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

Notices / 注意事项