


/ Descriptions

SOT-23 PNP


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

-			

/ Electrical Characteristics(Ta=25)

						1
						1
-						1
-						
-						
-	-					


/ Electrical Characteristic Curve

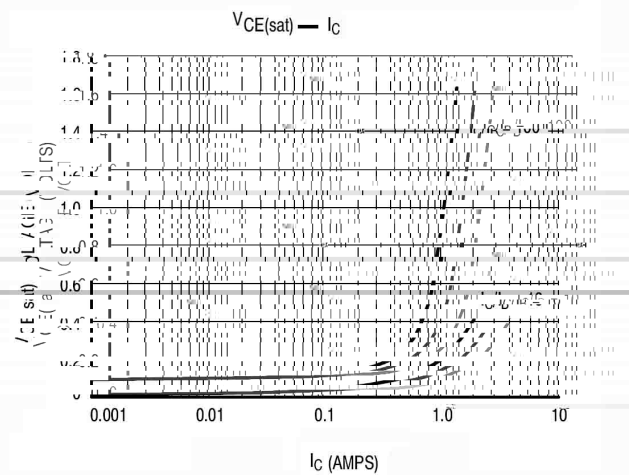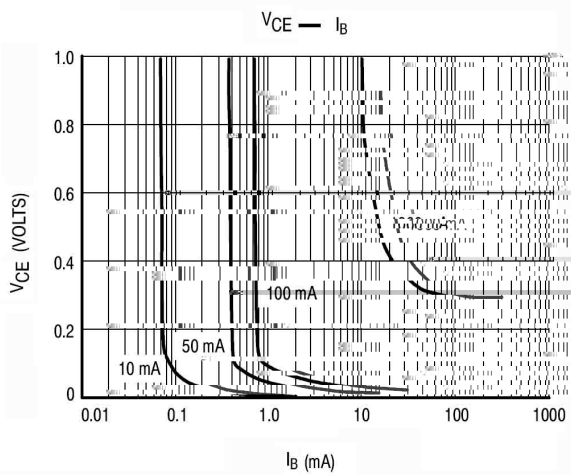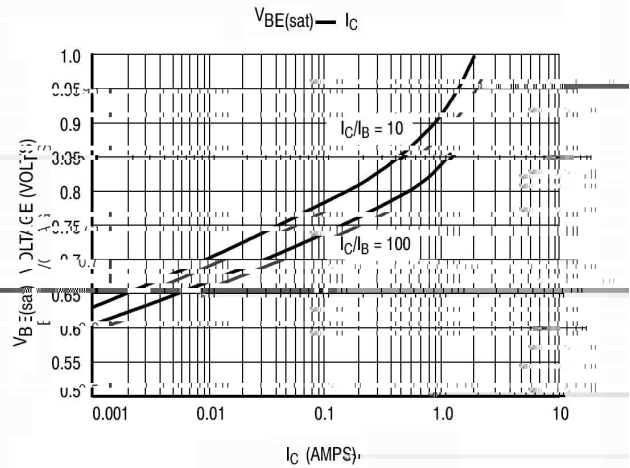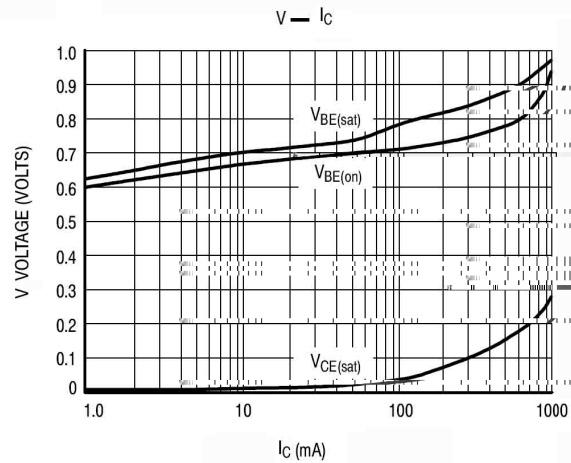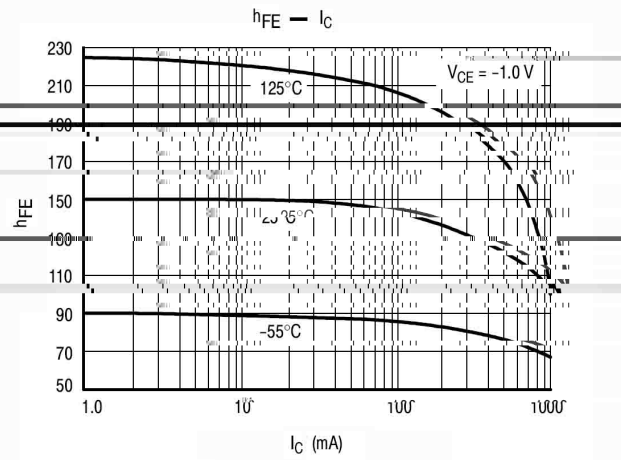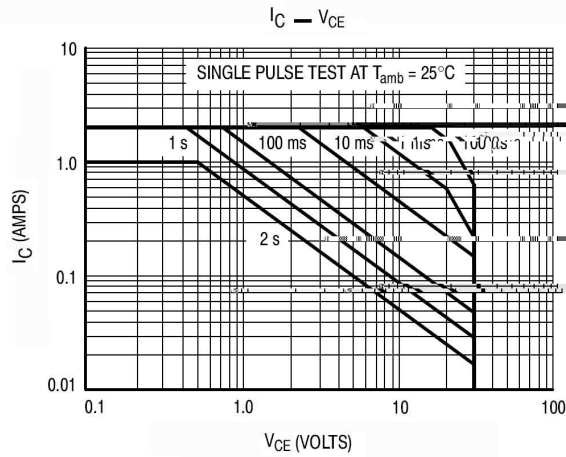

/ Package Dimensions


SOT-23

单位：mm

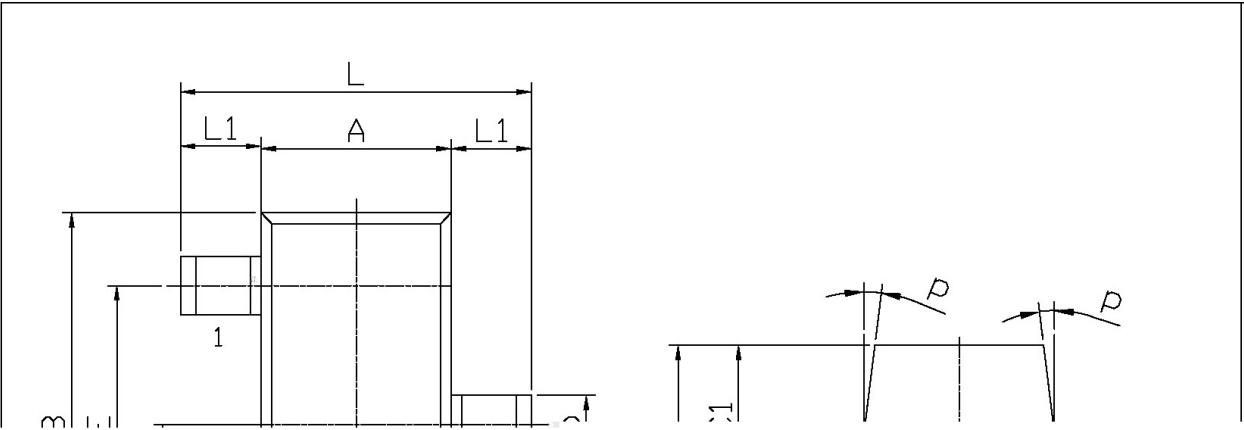

Symbol		Unit		Symbol		Unit	
L	2.2	2.7	C	1.30Max			
L1	0.45	0.65	C1	0.90	1.20		
A	1.15	1.50	α	0.05	0.20		
B	2.70	3.10	K	0	0.10		
E	1.70	2.10	M	0.20MIN			
E1	0.85	1.05	φ	7°			
b	0.35	0.55					


/ Marking Instructions

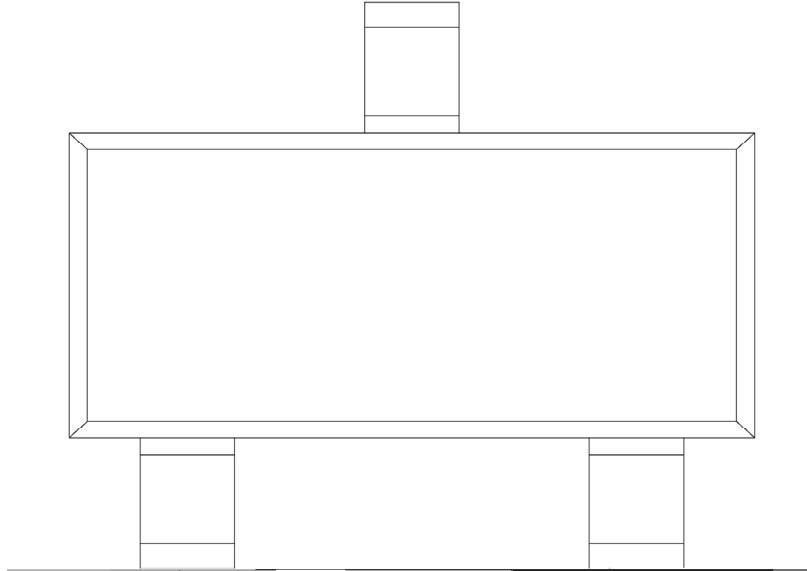

H
G3

H
G3

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

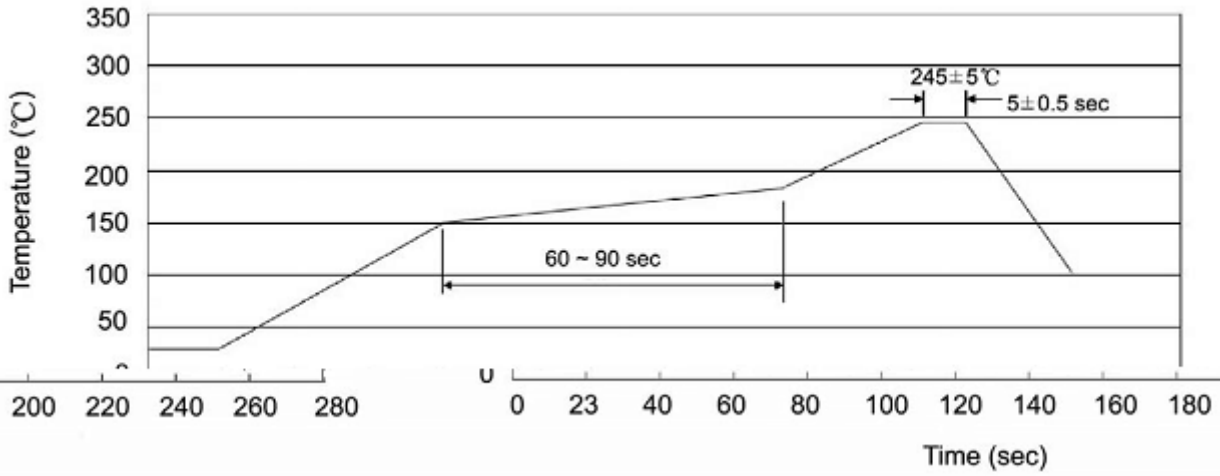

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices