

MMBTA05

/ Descriptions


SOT-23 NPN

/ Features

MMBTA55

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

/ Absolute Maximum Ratings(Ta=25 –)


/ Electrical Characteristics(Ta=25 –)

MMBTA05

/ Package Dimensions


SOT-23

单位; mm

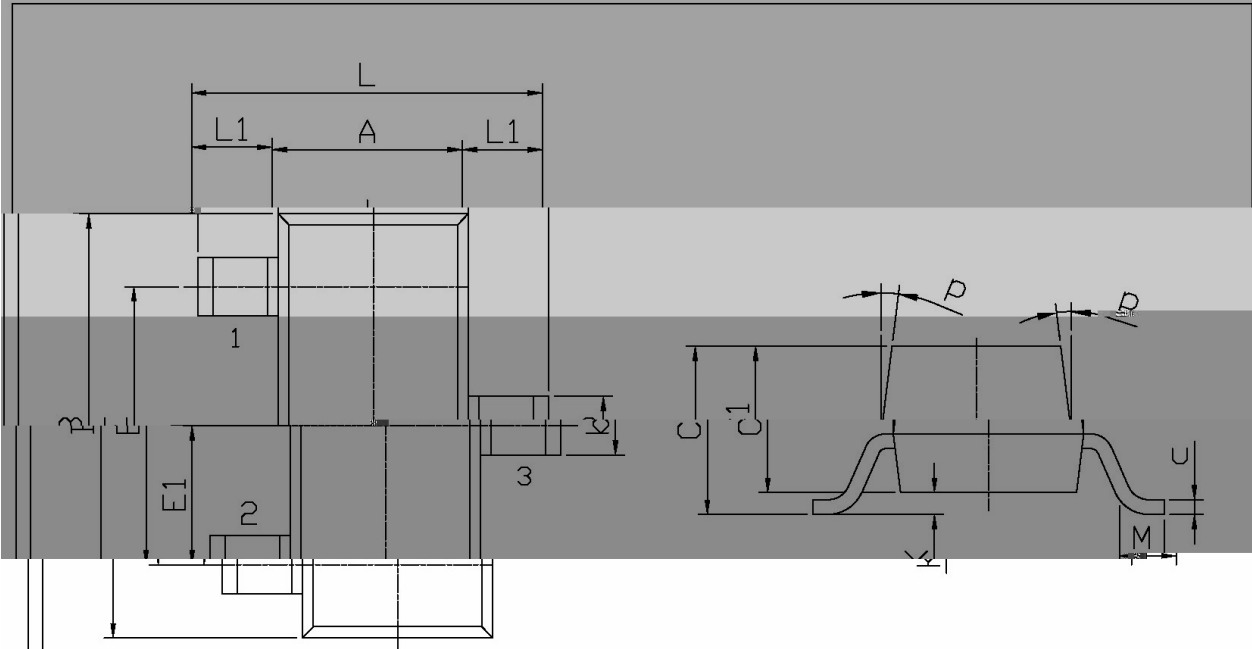


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.2	2.7	C1	0.90	1.20
L1	0.45	0.65	C	0.05	0.20
A	1.15	1.50	K	0	0.10
B	2.70	3.10	M	0.20MIN	
E	1.70	2.10	7°		
E1	0.85	1.05			
F1	0.35	0.55			
b					

/ Marking Instructions

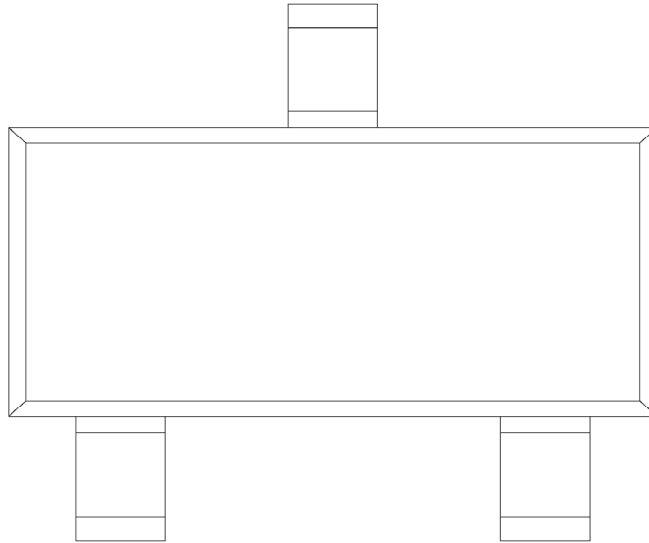

H
K1H

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

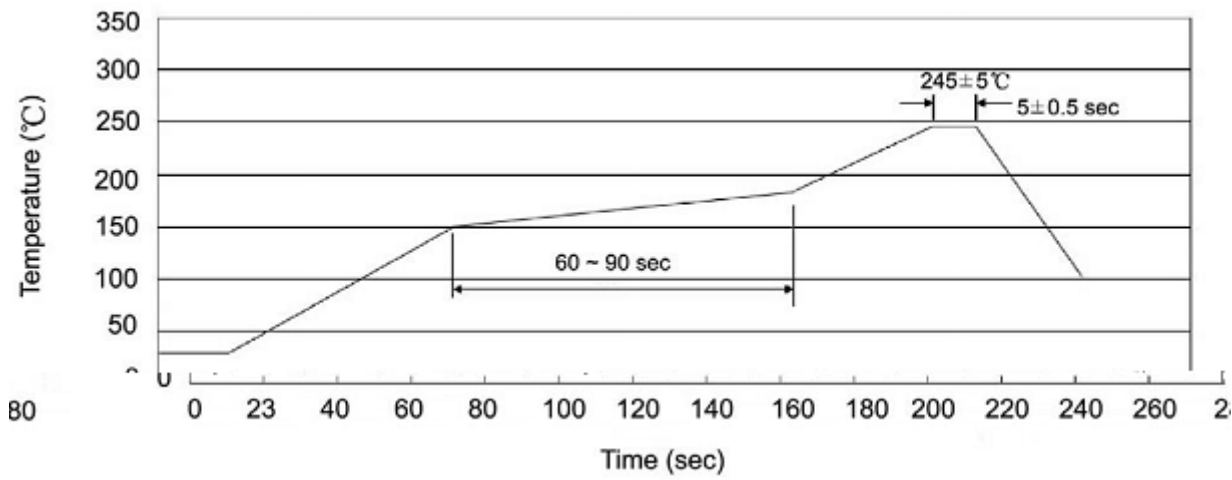

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.