

/ Revised record

[illegible]

SOT-363 Y Z Z 2 [NPN \] ^ _ ` a M
Double

b c d e f , g h MMDT5401 i j M F G k l M

m n o p f e q r M

s t

s t


s t

/ h_{FE} Classifications & Marking


u v	w x	v y	z {




/ Electrical Characteristic Curve

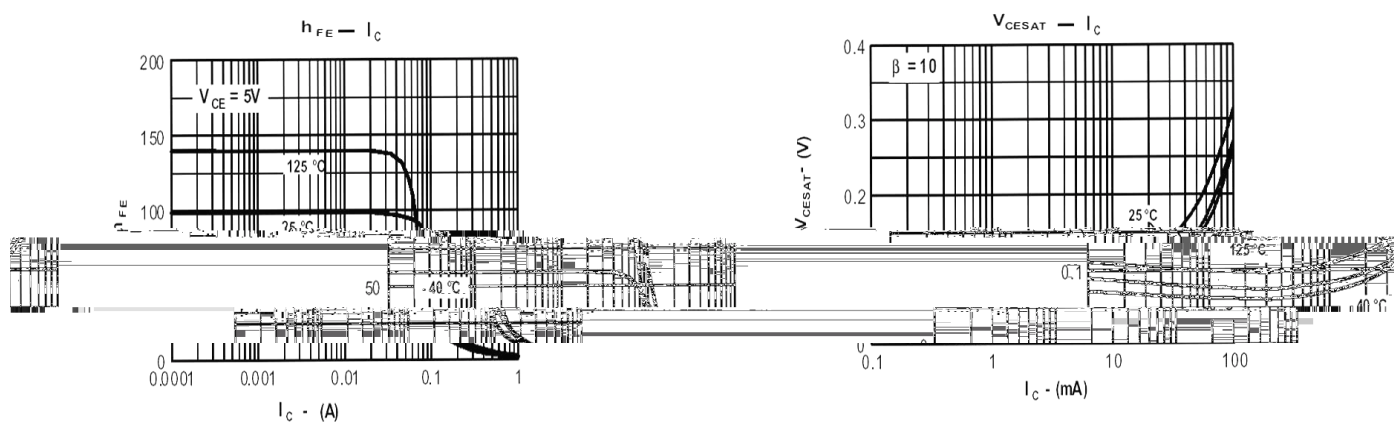

/ Package Dimensions

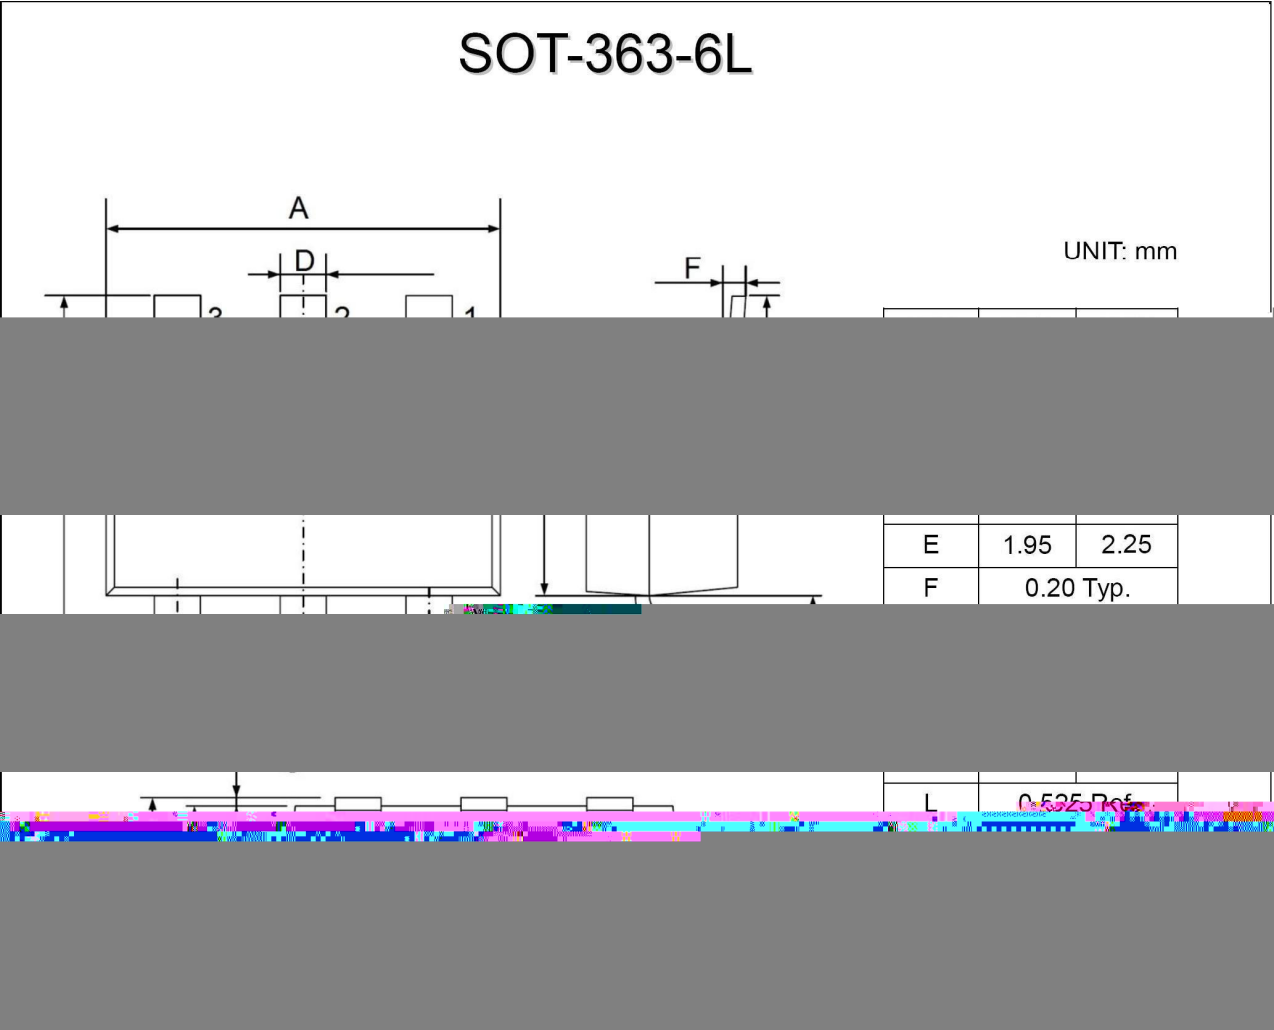


/ Marking Instructions

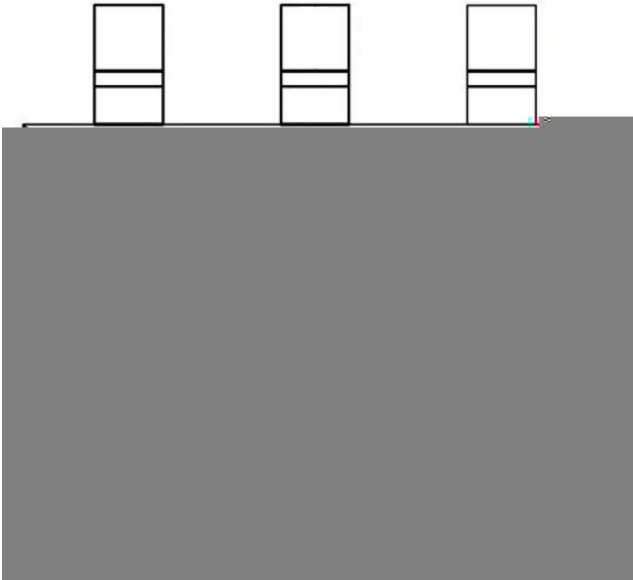

| S t
● t " ©1 a «
G1 t " ¥ x ¬ '
***: " ® k ¯ x ¬ ' H ° ® k ¯ x ± ²

● t "1" Pin
G1 t
***:

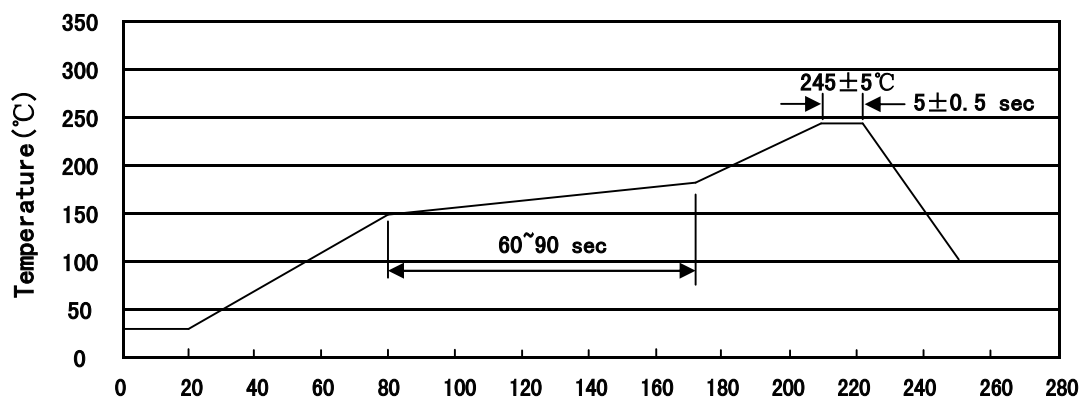
$$\begin{array}{ccccccc} & & & & ^\circ \text{C} & & \\ \pm & & \pm & & \pm & ^\circ \text{C} & \pm \\ & ^\circ \text{C} & & & & ^\circ \text{C} & \\ & & & & & & \end{array}$$

/ Resistance to Soldering Heat Test Conditions

$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$
/ **Packaging SPEC.**

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180,000	7" x8	180×120×180	390×385×205

/ Notices