

/ Descriptions

/ Features

2.4V-110V

200mW

/ Applications

200mW SOD-323

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	θ		
	θ		







						Ω	Ω			

MMSZ52XXBS




DATA SHEET

/ Electrical Characteristic Curve

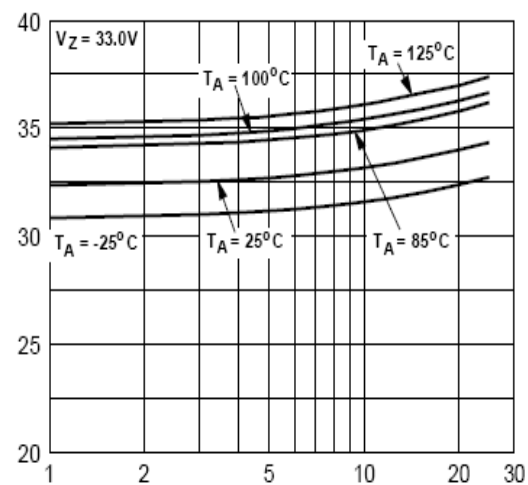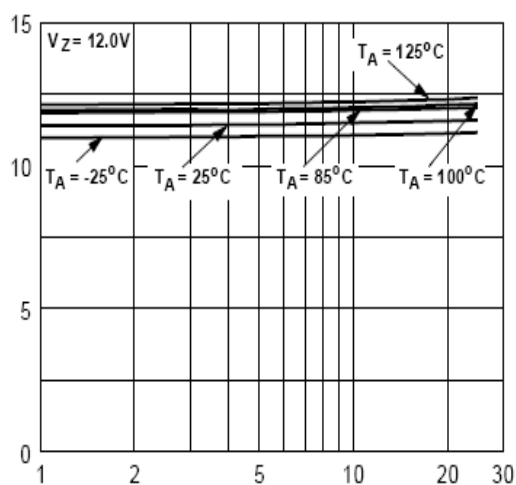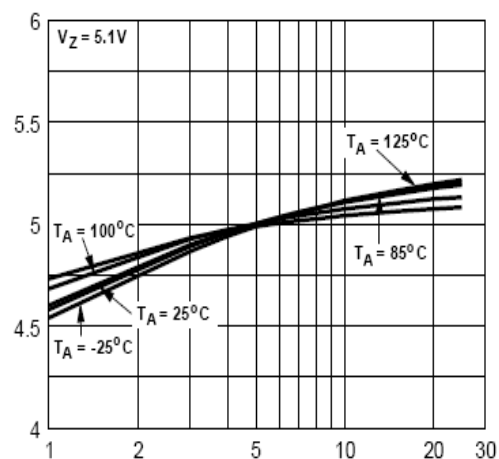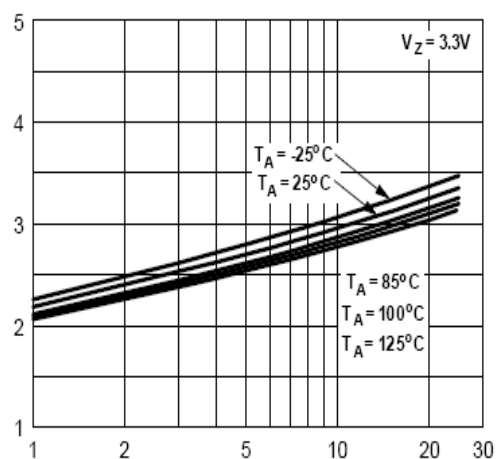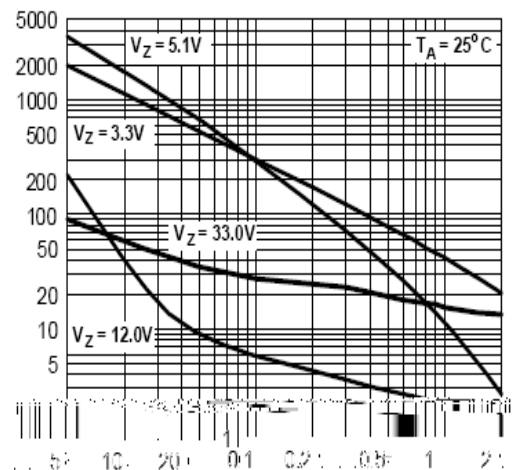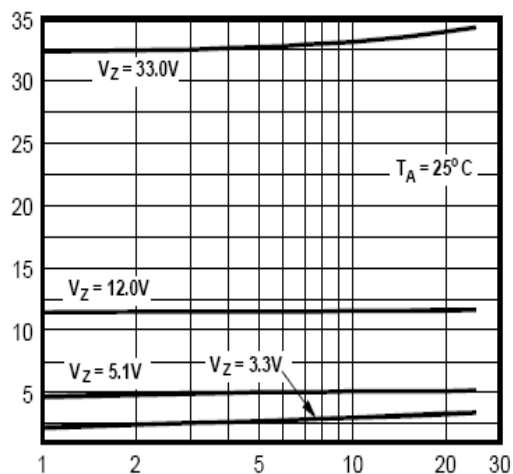

/ Package Dimensions

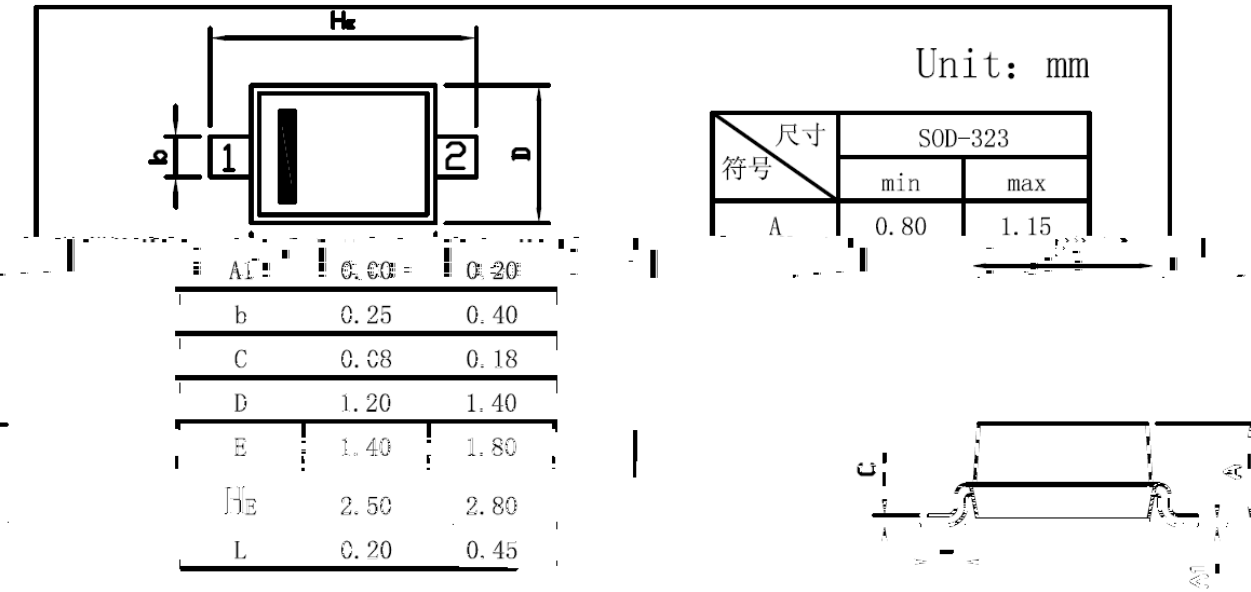


AN 3

-323

PN: 1CA 3 24


S 3

/ Marking Instructions

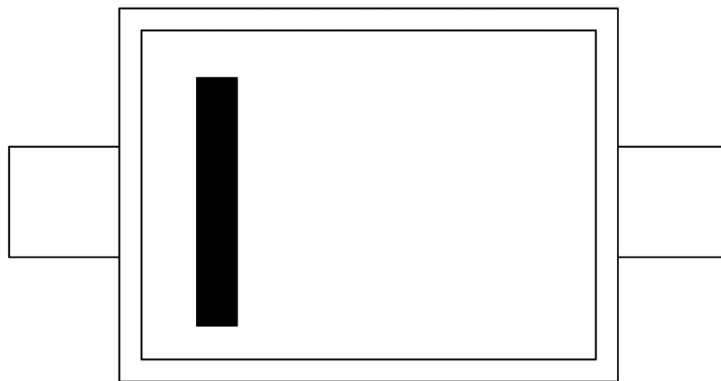

H
H2

() /

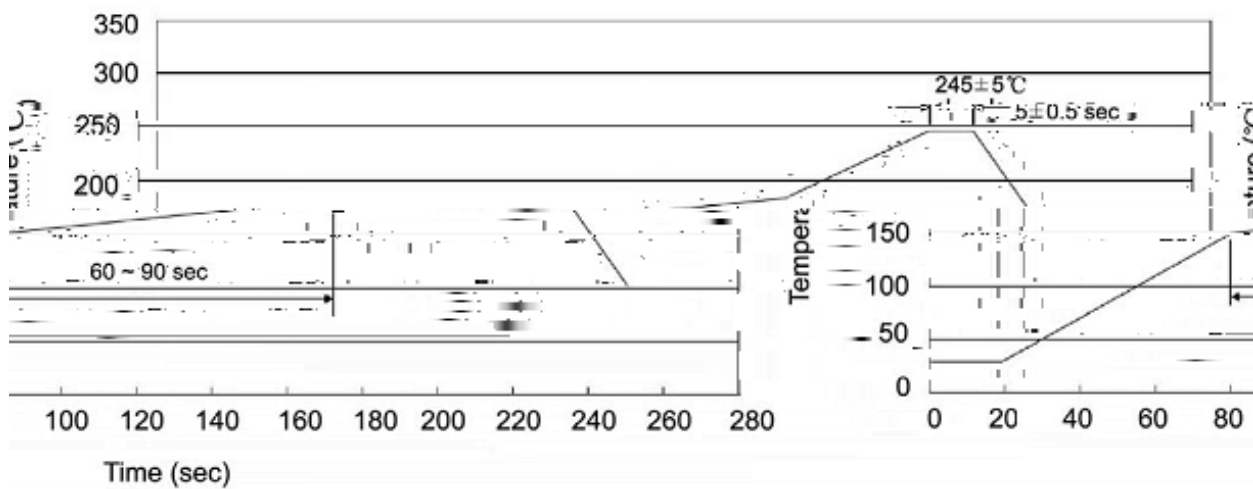

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOD-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices