


/ Descriptions

TO-220


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

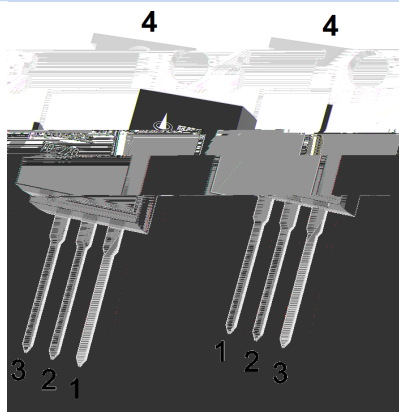

/ Marking

℃			
	θ		
		~	

		℃				
		℃				
		℃				μ
		℃				



/ Electrical Characteristic Curve

Fig.1 Typical Forward Current Derating Curve

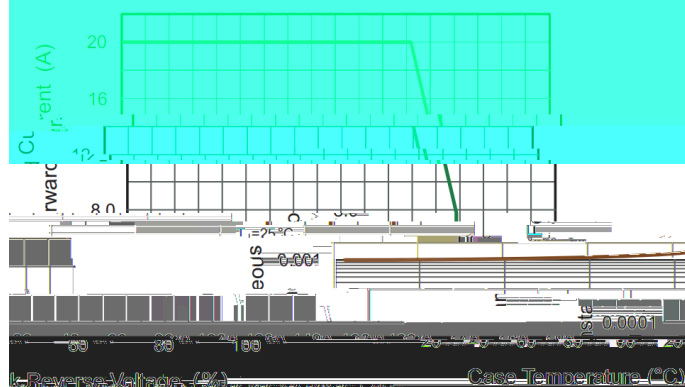


Fig.2 Typical Reverse Characteristics

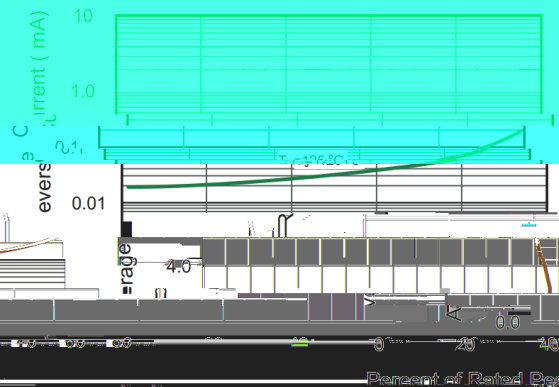


Fig.3 Typical Forward Characteristics


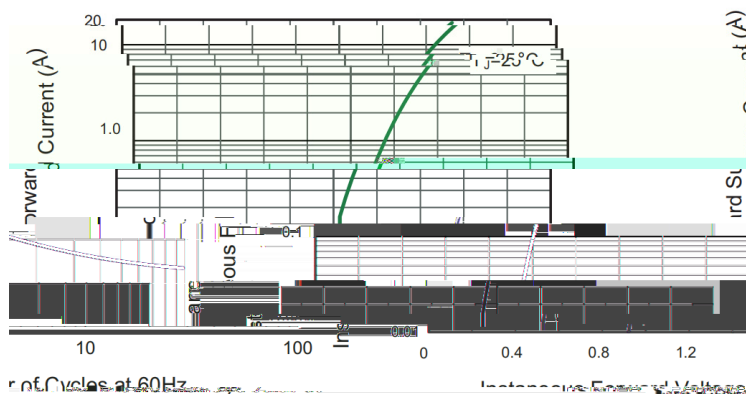



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

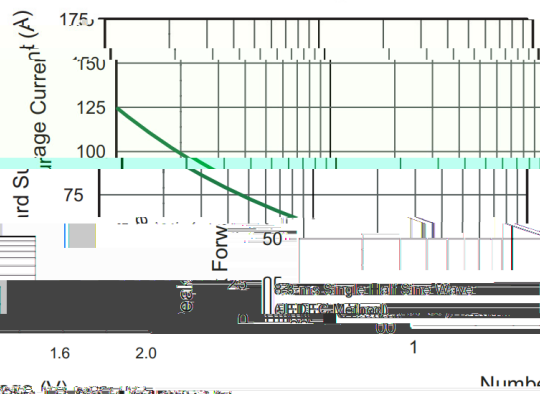

/ Package Dimensions


T0-220

单位: mm

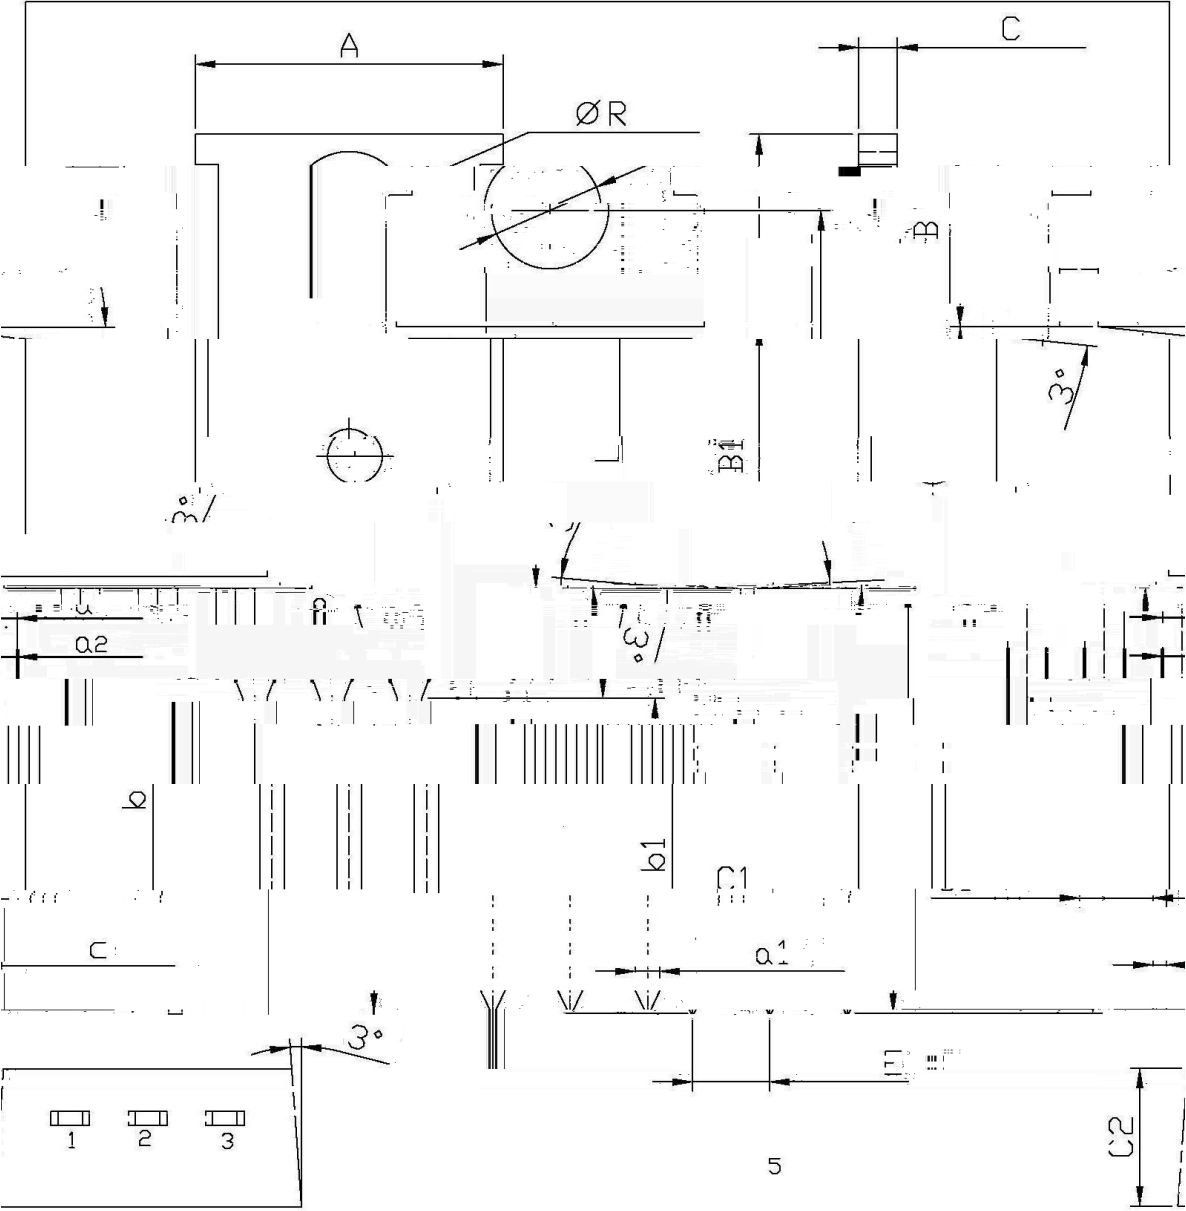

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
B1	15.7	16.1	B1	9.0	9.4
b1	12.6	13.6	C1	2.2	2.6

/ Marking Instructions

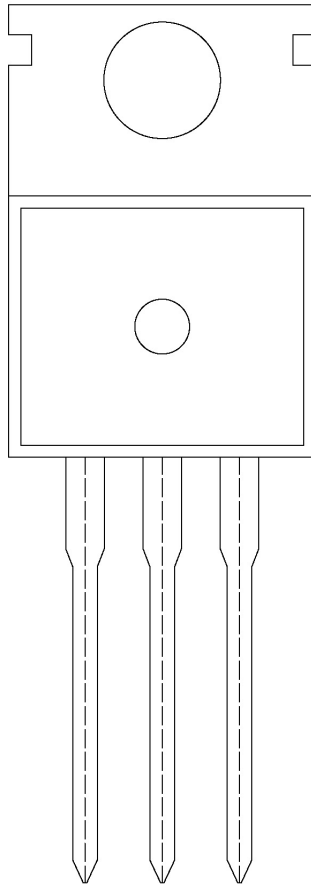


BR

MUR2060

CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

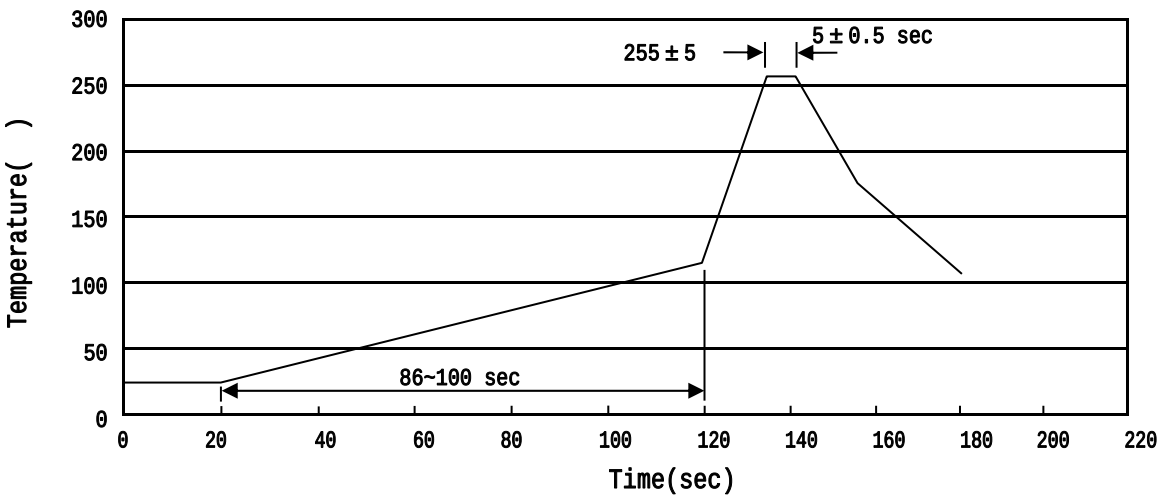

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices