


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

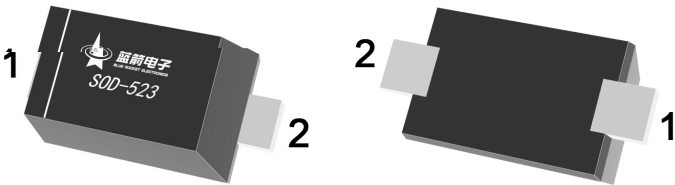


/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


		μ				
						μ

/ Electrical Characteristic Curve

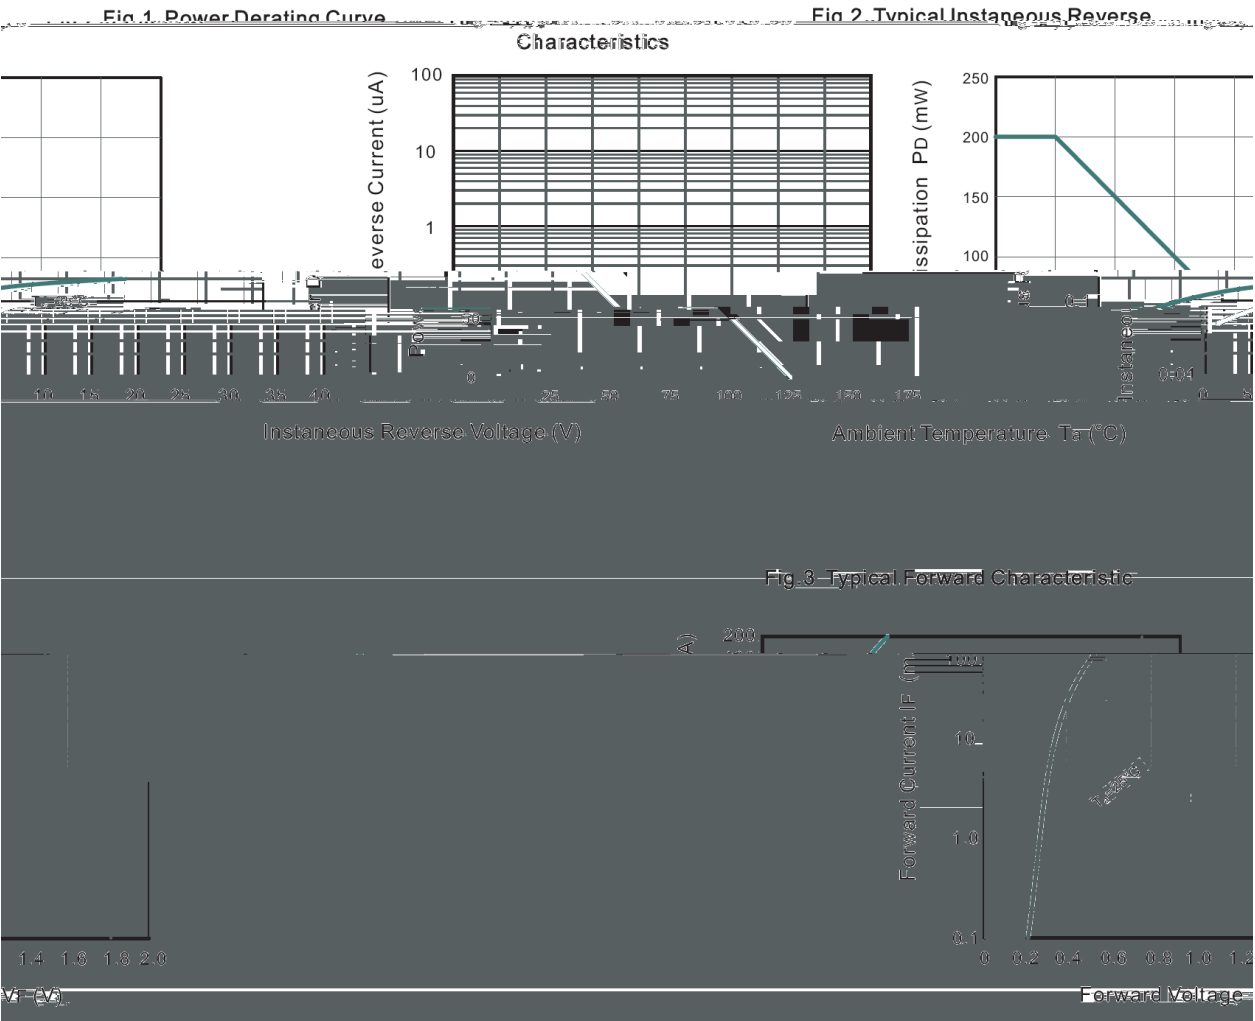


/ Package Dimensions

SOD-523

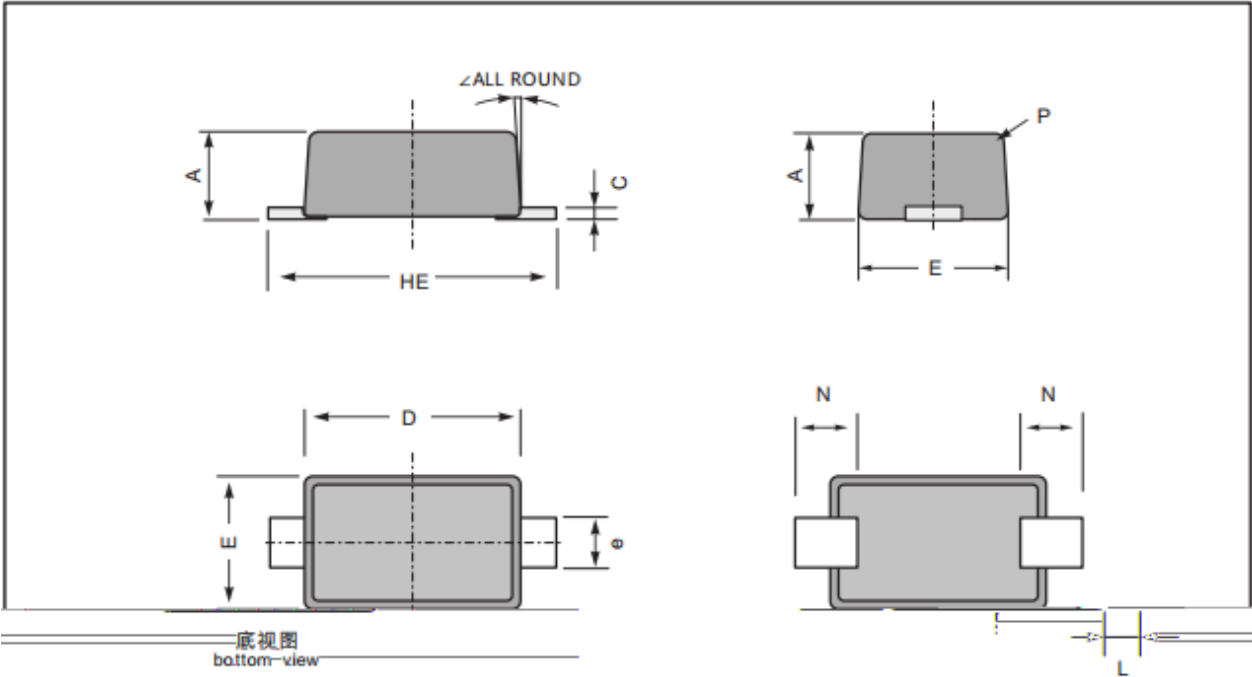

	F	HE	N	L	P		UNIT	A	e	C	D	
ix	0.77	0.35	0.15	1.30	0.99	1.70	0.35	0.2	R0.1			mm
n	0.51	0.25	0.08	1.10	0.75	1.50	ref	ref	ALL ROUND			mi
ix	30	14	6	51	39	67	14	8.0	R4.0			mil
n	20	10	3	43	30	59	ref	ref	ALL ROUND			mi

/ Marking Instructions

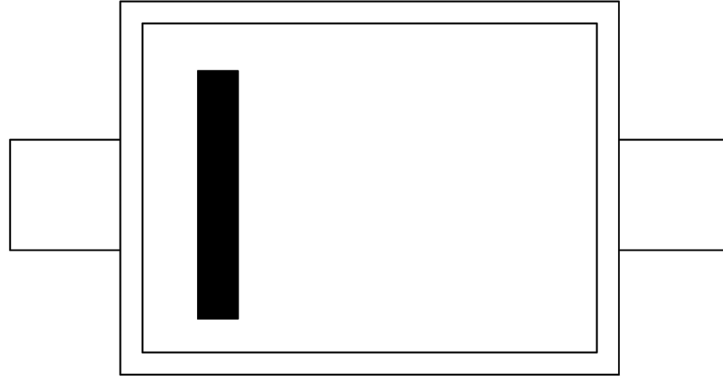

B

$\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

6 6