

/ Descriptions

83Y£4333Y 5!3D VPEI

/ Features

UrKV 53442982HX 0


/ Applications

1

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

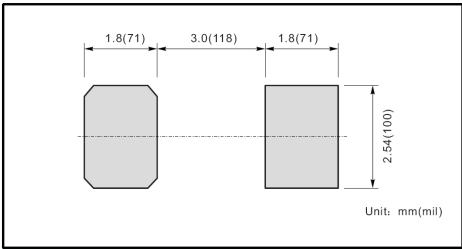

/ Marking


/ Absolute Maximum Ratings(Ta=25)

℃	()								
)									
)	Δ								℃
									℃


/ Electrical Characteristics(Ta=25)

			数值	
		℃		μ
		℃		μ

/ Electrical Characteristic Curve

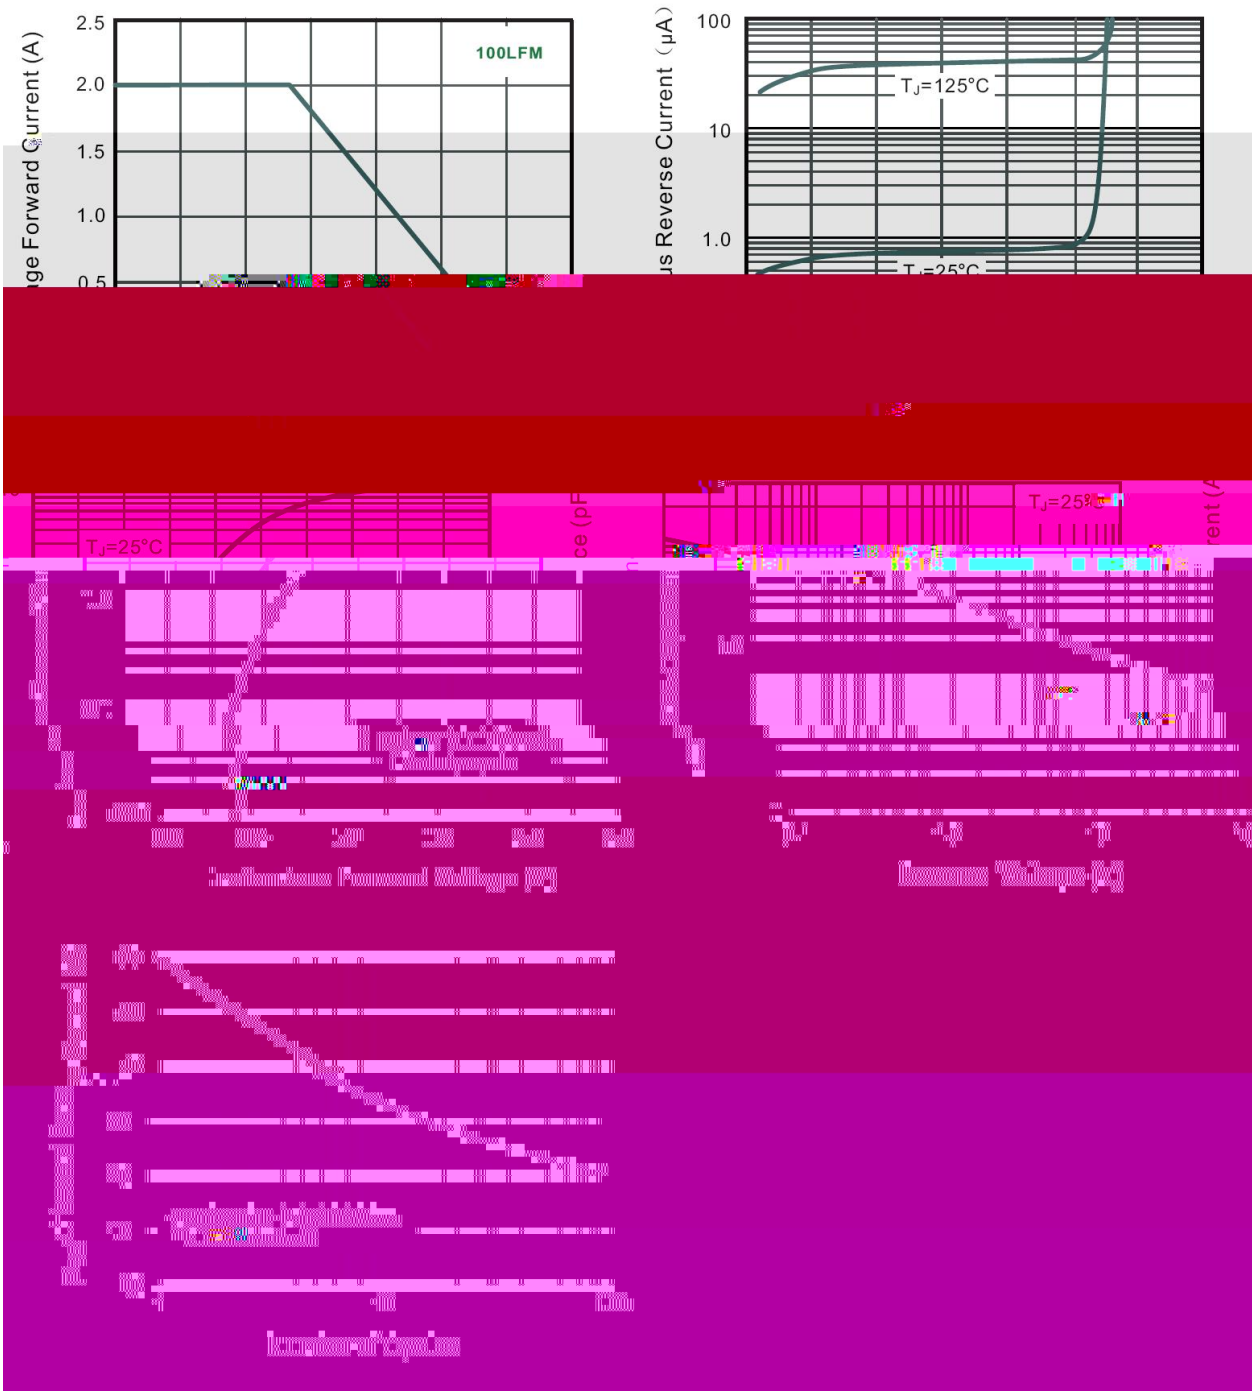

/ Package Dimensions

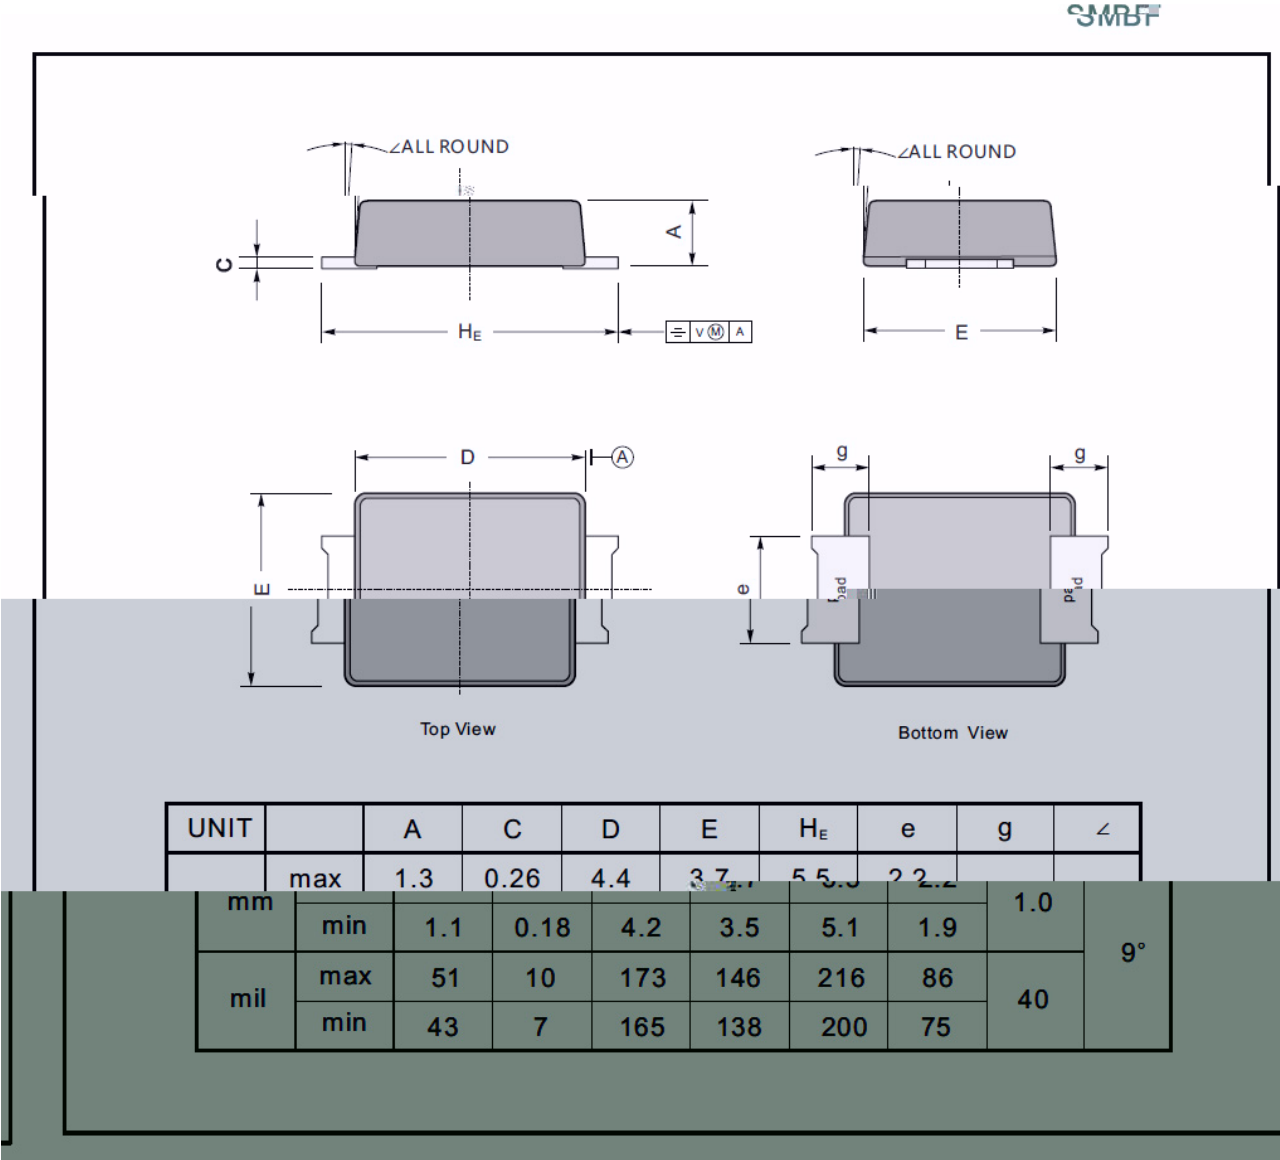


/ Marking Instructions

Marking

Type number	Marking code
S2AB	S2ABF ^{***}
S2BB	S2BBF ^{***}
S2DB	S2DBF ^{***}
S2GB	S2GBF ^{***}
S2JB	S2JBF ^{***}
S2KB	S2KBF ^{***}
S2MB	S2MBF ^{***}

/ Marking Instructions

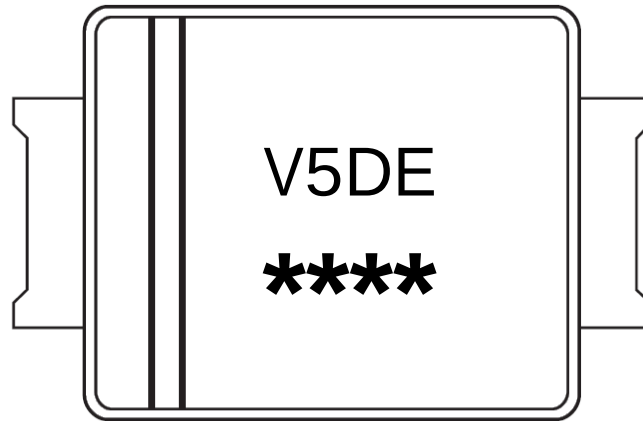

S2ABF~S2MBF



DATA SHEET

() /

$$\begin{array}{ccc} & 3/8 & \\ 2 & 3/8 & 2 \end{array}$$
$$\begin{array}{ccc} & 3/8 & \\ 2 & 3/8 & 2 \end{array}$$